

FEATURES

1. High efficiency up to 94%
2. Wide input voltage range: 4.5VDC-14.4VDC
3. Adjustable output voltage: 0.6VDC-5.5VDC
4. Operating ambient temperature range: -40°C to +85°C
5. Output short-circuit protection
6. High-speed transient response
7. Compact SMD package: 12.20 x 12.20 x 8.70mm
8. SENSE, TRIM, PGOOD



3 years
Warranty

Selection Guide

Part No. ^①	Input Voltage (VDC)		Output		Efficiency(%) Min./Typ.	Capacitive Load(μF) Max.
	Nominal (Range)	Max. ^②	Voltage(VDC) ^③ (Range)	Current (A) Max./Min.		
K12MT-6A-P(N)	12 (4.5-14.4)	15	0.6-5.5	6/0	91/94	1000

Notes: ① "P" indicates that the ON/OFF pin is positive logic control, "N" indicates that the ON/OFF pin is negative logic control;

② Exceeding the maximum input voltage may cause permanent damage;

③ The default output voltage is 0.6VDC, which can be adjusted to 1.2VDC, 1.8VDC, 2.5VDC, 3.3VDC, 5VDC. See Trim instructions for specific output voltage adjustment;

④ Unless otherwise specified, parameters in this table were measured under the 5VDC output voltage.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load/no-load)	Nominal input voltage		—	2660/1	—	mA
Start-up Voltage ^①			—	—	4.5	VDC
Reverse Polarity Input			Avoid / Not protected			
Hot Plug			Unavailable			
Input Filter			Capacitance filter			
ON/OFF ^②	Module on	K12MT-6A-P (Positive logic)	ON/OFF pin open or pulled high (3VDC ~ Vin)			
		K12MT-6A-N (Negative logic)	ON/OFF pin open or pulled low to GND (-0.2VDC ~ 0.2VDC)			
	Module off	K12MT-6A-P(Positive logic)	ON/OFF pin pulled low to GND (-0.2VDC ~ 0.2VDC)			
		K12MT-6A-N (Negative logic)	ON/OFF pin pulled high (3VDC ~ Vin)			
	Input current when off		—	—	1	mA

Notes: ① Start-up voltage is 8VDC Max. under the 5VDC output voltage;

② The ON/OFF pin voltage is referenced to GND;

③ Unless otherwise specified, parameters in this table were measured under the 5VDC output voltage.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy	Input voltage range, 0% -100% load	TRIM resistor with 0.1% tolerance	—	--	±1	%
		TRIM resistor with 1% tolerance	—	--	±3	
Linear Regulation	Full load, input voltage range	Vout≥2.5VDC	—	--	±0.4	%
		Vout<2.5VDC	—	--	±5	mV

Load Regulation	Nominal input voltage, 10% -100% load	Vout<5VDC	—	—	±10	mV
		Vout≥5VDC	—	—	±20	
Ripple & Noise ^①	20MHz bandwidth, nominal input voltage, 10%-100% load		—	50	100	mVp-p
Trim			0.6	—	5.5	VDC
Sense			—	—	0.5	V
Transient Response Deviation	Nominal input voltage, 50%-100%-50% load step change, di/dt=2.5A/us	Vout=0.6VDC Co=2*47μF + 4*330μF	—	±15	—	mV
		Vout=1.2VDC Co=47μF + 3*330μF	—	±25	—	
		Vout=1.8VDC Co=47μF + 330μF	—	±50	—	
		Vout=2.5VDC Co=3*47μF	—	±65	—	
		Vout=3.3VDC Co=3*47μF	—	±70	—	
		Vout=5VDC Co=2*47μF	—	±120	—	
Short-circuit Protection	Nominal input voltage		Re-power on or ON/OFF reset to recover			
Temperature Coefficient	100% load		—	—	±0.4	%/°C
Notes: ① Ripple & noise test needs to be connected to 0.1μF + 22μF ceramic capacitors; ② Unless otherwise specified, parameters in this table were measured under the 5VDC output voltage.						




General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Operating Temperature	See Fig. 1	-40	—	+85	°C
Storage Temperature		-55	—	+125	
Storage Humidity	Non-condensing	5	—	95	%RH
Reflow Soldering Temperature		Peak temp. Tc ≤245°C, maximum duration time≤60s over 217°C. For actual application, please refer to IPC/JEDEC J-STD-020D.1.			
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	Full load, nominal input voltage	—	500	—	kHz
MTBF	MIL-HDBK-217F@25°C	18595	—	—	k hours

Mechanical Specifications


Dimensions	12.20 x 12.20 x 8.70mm
Weight	2.5g (Typ.)
Cooling Method	Nature convection

Typical Characteristic Curve

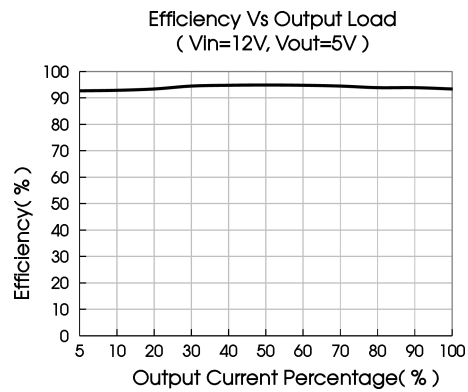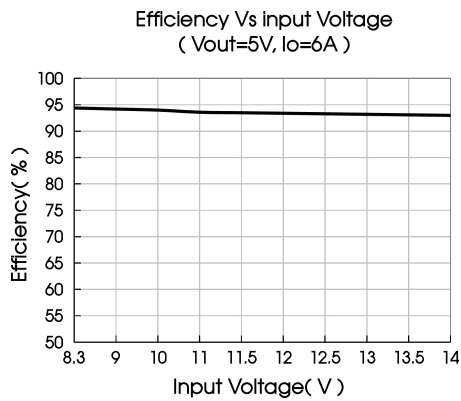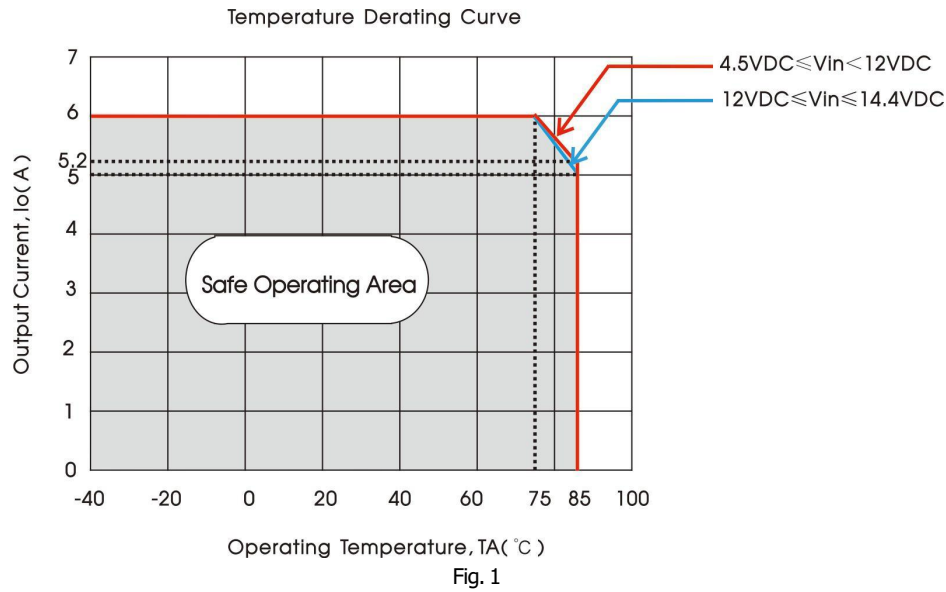

Remote Sense Application


1. Remote sense connection if not used

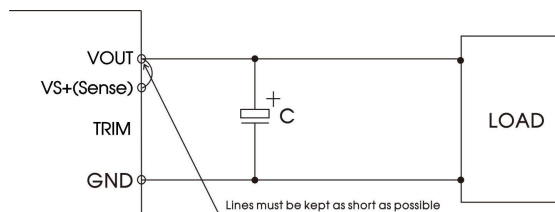

Notes:

1. If the sense function is not used for remote regulation the user must connect the Sense to Vout at the DC-DC converter pins and will compensate for voltage drop across pins only;
2. The connections between Sense and Vout must be kept as short as possible, otherwise they may be picking up noise, interference and/or causing unstable operation of the power module.

2. Remote sense connection used for compensation

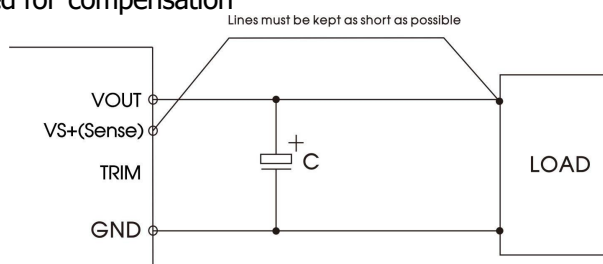

- Notes:
1. Using remote sense with long wires may cause unstable operation, please contact technical support if long wires must be used;
 2. We recommend using adequate cross section for PCB-track layout and/or cables to connect the power supply module to the load in order to keep the voltage drop below 0.5V and to make sure the power supply's output voltage remains within the specified range;
 3. Note that large wire impedance may cause oscillation of the output voltage and/or increased ripple. Consult technical support or factory for further advice of sense operation.

PGOOD Application

PGOOD recommended circuit




Fig. 2

- Notes:
- PGOOD is the power good detection pin. When the product is working normally, PGOOD at a high level, and LED2 on; when the product is abnormal, which means the voltage on the FB pin is not within $\pm 10\%$ of the 0.6V, PGOOD is pulled to ground, and LED2 off.

Table 1

R1	100k Ω
R2	Selecting based on LED2's current in application

Design Reference

1. Typical application

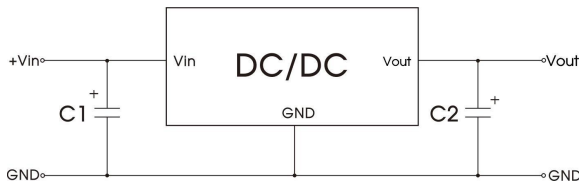


Fig. 3

- Notes:
1. The required capacitors C1 and C2 must be connected as close as possible to the terminals of the module, to ensure the stability of the converter;
 2. To reduce the output ripple furtherly, increased values and/or tantalum or low ESR polymer capacitors may also be used instead;
 3. Refer to Table 2 for C1 and C2 capacitor values;
 4. Converter cannot be used for hot swap and with output in parallel.

Table 2

Part No.	C1	C2
K12MT-6A-P(N)	Vout=0.6V	4*330 μ F
	Vout=1.2V	2*330 μ F
	Vout=1.8V	1*330 μ F
	Vout=2.5V	3*47 μ F
	Vout=3.3V	3*47 μ F
	Vout=5V	2*47 μ F

2. Trim function for output voltage adjustment (open if unused)




Fig. 4 TRIM resistor connection (dashed line shows internal resistor network)

Table 3

VOUT (VDC)	R _T (k Ω)
0.6	Open
1.2	20
1.8	10
2.5	6.316
3.3	4.444
5	2.727

Calculating Trim resistor (R_T) values::

$$R_T(k\Omega) = \frac{12}{V_O - 0.6}$$

- Notes: 1. R_T: Resistance of Trim; Vout: The trim up voltage;
2. If R_T = ∞ or Trim pin open, Vout = 0.6VDC.

Device	Package Type	Pin	MPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Clipped corner Quadrant
K12MT-6A	SMD	17	340	330.0	24.4	12.95	12.95	9.1	20	24	Q2

Notes:

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
2. The maximum capacitive load is tested under the input voltage range and full load condition;
3. Unless otherwise stated, all indexes in this manual are measured at $T_a=25^{\circ}\text{C}$, humidity $<75\%\text{RH}$, nominal input voltage and rated output load;
4. All index testing methods in this manual are based on the enterprise standards of the company;
5. Our company can provide product customization, specific needs can directly contact our technical staff;
6. AMCHARD reserves the right to make changes to the product at any time without notice.