

FEATURES

1. Wide input voltage range: 36-75VDC
2. High efficiency up to 95%
3. Basic insulation, I/O isolation test voltage 2250VDC
4. Operating ambient temperature range -40°C to +85°C
5. Input under-voltage protection, output over-voltage, over-current, short-circuit, over-temperature protection
6. Industry standard 1/4-Brick package and pin-out
7. Meet EN62368 standards



3 years
Warranty

Selection Guide

Part No. ^①	Ctrl Logic ^②	Input Voltage (VDC)		Output		Full Load Efficiency(%) Min./Typ.	Max. Capacitive Load(μF)	Min. Capacitive Load ^③ (μF)				
		Nominal (Range)	Max. ^③	Voltage (VDC)	Current (mA) (Max./Min.)							
GT4812QBO-400W(F/H)R3	P	48 (36-75)	80	12	33000/0	93/95	10000	470				
GT4815QBO-400W(F/H)R3				15	26500/0		6800					
GT4824QBO-400W(F/H)R3				24	16500/0		3300					
GT4828QBO-400W(F/H)R3				28	14200/0		3300					
GT4812QBO-400W(F/H)R3-N	N			48 (36-75)	80		12		33000/0	93/95	10000	470
GT4815QBO-400W(F/H)R3-N							15		26500/0		6800	
GT4824QBO-400W(F/H)R3-N							24		16500/0		3300	
GT4828QBO-400W(F/H)R3-N							28		14200/0		3300	

Note:

- ① Use "F" suffix is for added aluminum baseplate and "H" suffix for heat sink mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;
- ② "P" means positive logic, "N" means negative logic;
- ③ Exceeding the maximum input voltage may cause permanent damage;
- ④ In order to ensure the output stability, a minimum capacitive load must be connected to the output side of the product.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Current(Full load/no load)	Nominal input voltage	GT4812QBO-400W(F/H)R3(-N)	-	-	8961/120	mA
		GT4815QBO-400W(F/H)R3(-N)	-	-	8961/150	
		GT4824QBO-400W(F/H)R3(-N)	-	-	8961/120	
		GT4828QBO-400W(F/H)R3(-N)	-	-	8961/150	
Reflected Ripple Current	Nominal input voltage	-	200	-		
Surge Voltage (1sec. max.)		-0.7	-	90	VDC	
Start-up Voltage		-	-	36		

Input Under-voltage Protection		30	32	–		
Start-up Time	Nominal input voltage, constant resistance load	–	–	100	ms	
Input Filter		LC filter				
Hot Plug		Unavailable				
Ctrl ^①	GT48_QBO-400W(F/H)R3	Module on	Ctrl open circuit or connected to TTL high level (3.3-12VDC)			
		Module off	Ctrl pin connected to -Vin or low level (0-1.2VDC)			
		Input current when off	–	13	–	mA
		Respond Time	–	–	50	ms
	GT48_QBO-400W(F/H)R3-N	Module on	Ctrl pin pulled low to GND (0-1.2VDC)			
		Module off	Ctrl pin open or pulled high (TTL 4.5-12VDC)			
		Input current when off	–	13	–	mA
		Respond Time	–	–	50	ms

Note: ① The Ctrl pin voltage is referenced to input -Vin.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy			–	±1	±3	
Linear Regulation	Input voltage variation from low to high at full load		–	±0.2	±0.5	%
Load Regulation	5%-100% load		–	±0.5	±0.75	
Transient Recovery Time	25% load step change, nominal input voltage		–	300	500	µs
Transient Response Deviation			–	±3	±5	%
Temperature Coefficient	Full load		–	–	±0.03	%/°C
Ripple & Noise ^①	Nominal input voltage, 100%Io	GT4812QBO-400W(F/H)R3(-N)	–	–	150	mVp-p
		GT4815QBO-400W(F/H)R3(-N)	–	–	150	
		GT4824QBO-400W(F/H)R3(-N)	–	–	220	
		GT4828QBO-400W(F/H)R3(-N)	–	–	220	
Trim			90	–	110	%Vo
Sense			–	–	105	
Over-temperature Protection	Max. Case Temperature		–	110	120	°C
Over-voltage Protection	Input voltage range		110	130	160	%Vo
Over-current Protection			110	140	170	%Io
Short-circuit Protection			Hiccup, continuous, self-recovery			

Notes: ① The "Tip and barrel" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Electric Strength Test for 1 minute with a leakage current of 1mA max	Input-output	2250	–	–	VDC
		Input-case	1500	–	–	
		Output-case	500	–	–	
Insulation Resistance	Input-output resistance at 500VDC		100	–	–	MΩ
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V		–	2200	–	pF
Operating Temperature	See temperature derating curves		–40	–	+85	°C
Storage Temperature			–55	–	+125	
Storage Humidity	Non-condensing		5	–	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds		–	–	+300	°C
	Wave-soldering, 10 secondsS		255	260	265	

Shock And Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	PWM mode	-	280	-	KHz
MTBF	MIL-HDBK-217F@25°C	1000	-	-	K hours

Mechanical Specifications


Case Material	Aluminum alloy case				
Dimension	GT48_QBO-400WR3(-N)	57.9 x 36.8 x 12.9 mm			
	GT48_QBO-400WHR3(-N)	57.9 x 36.8 x 25.6 mm			
	GT48_QBO-400WFR3(-N)	62.0 x 56.0 x 14.7 mm			
Weight	GT48_QBO-400WR3(-N)	71.4g(Typ.)			
	GT48_QBO-400WHR3(-N)	102.8g(Typ.)			
	GT48_QBO-400WFR3(-N)	91.4g(Typ.)			
Cooling Method	Free air convection or forced air convection				

Electromagnetic Compatibility (EMC)


Emissions	CE	CISPR32/EN55032 CLASS A (see Fig.6-1 for recommended circuit)			
		CISPR32/EN55032 CLASS B (see Fig.6-2 for recommended circuit)			
	RE	CISPR32/EN55032 CLASS A (see Fig.6-1 for recommended circuit)			
		CISPR32/EN55032 CLASS B (see Fig.6-2 for recommended circuit)			
Immunity	ESD	IEC61000-4-2	Contact ±6KV, Air ±8KV	perf.Criteria B	
	RS	IEC61000-4-3	10V/m (see Fig.6-2 for recommended circuit)	perf.Criteria A	
	EFT	IEC61000-4-4	±2KV (see Fig.6-1 or Fig.6-2 for recommended circuit)	perf.Criteria A	
	Surge	IEC/EN61000-4-5	line to line ±2KV (see Fig.6-1 or Fig.6-2 for recommended circuit)	perf.Criteria B	
	CS	IEC61000-4-6	10Vr.m.s (see Fig.6-2 for recommended circuit)	perf.Criteria A	

Typical Performance Curves


GT4812QBO-400W(F/H)R3(-N)
Efficiency VS Output Load

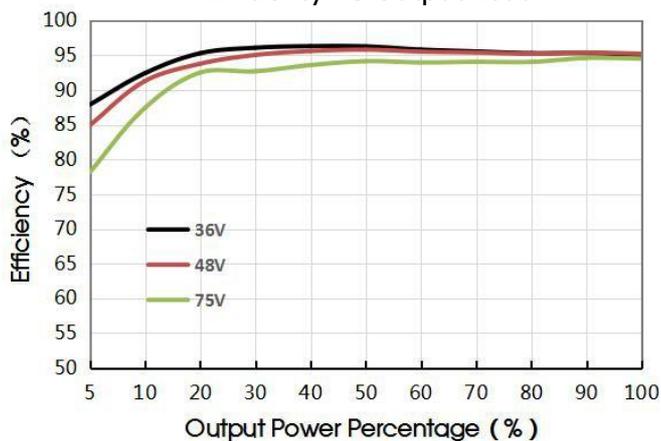


GT4812QBO-400W(F/H)R3(-N)
Efficiency VS Input Voltage

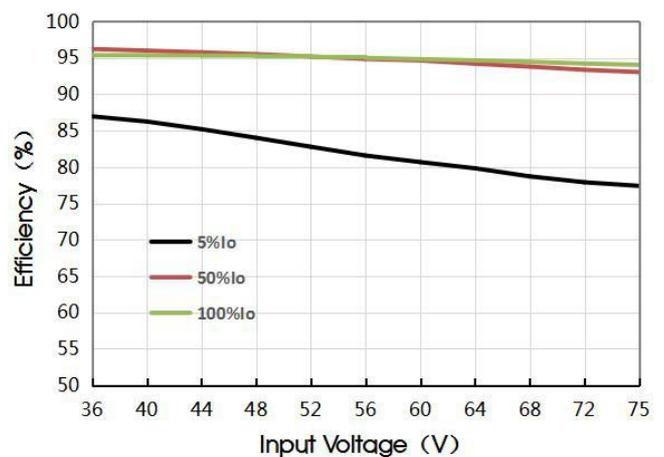


GT4815QBO-400W(F/H)R3(-N)
Efficiency VS Output Load

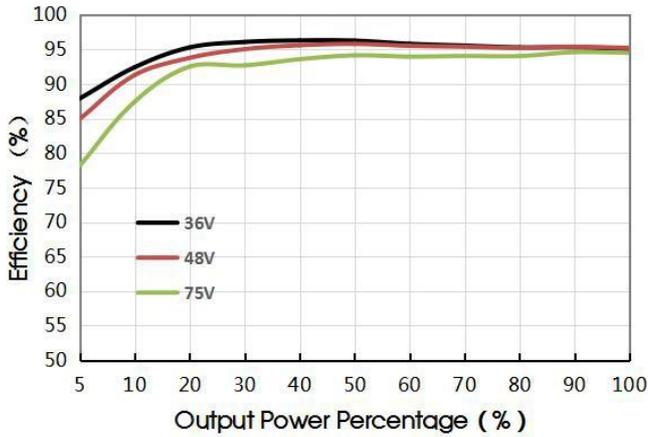


GT4815QBO-400W(F/H)R3(-N)
Efficiency VS Input Voltage

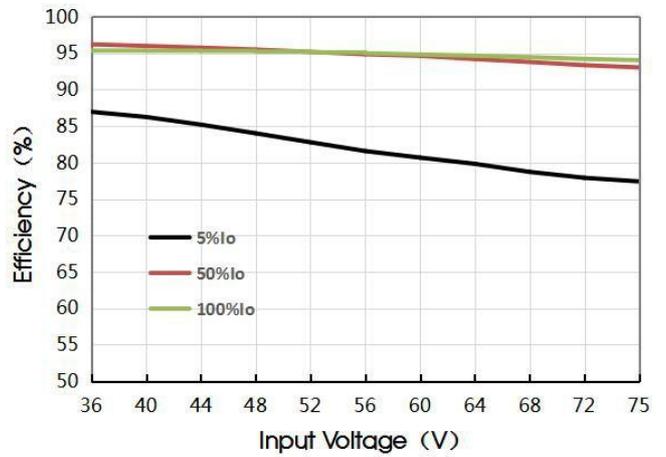


GT4824QBO-400W(F/H)R3(-N)
Efficiency VS Output Load

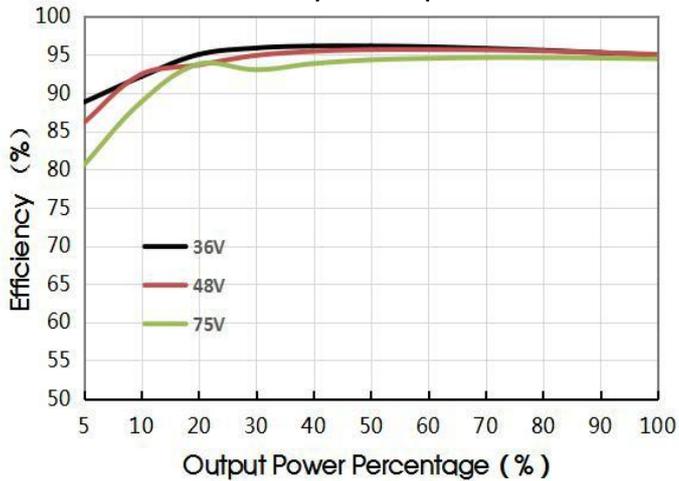


GT4824QBO-400W(F/H)R3(-N)
Efficiency VS Input Voltage

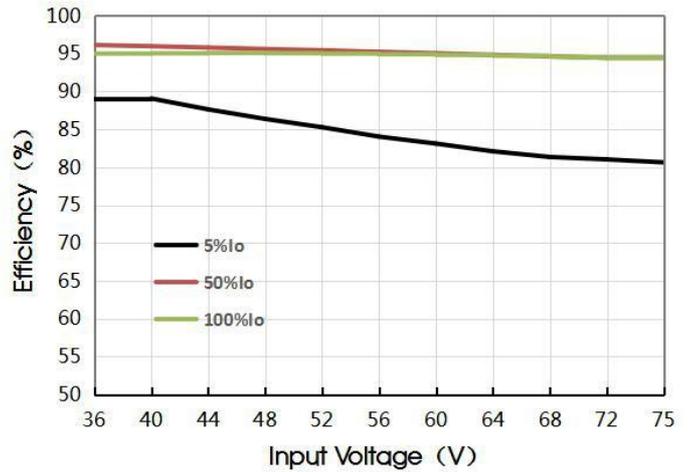


GT4828QBO-400W(F/H)R3(-N)
Efficiency VS Output Load

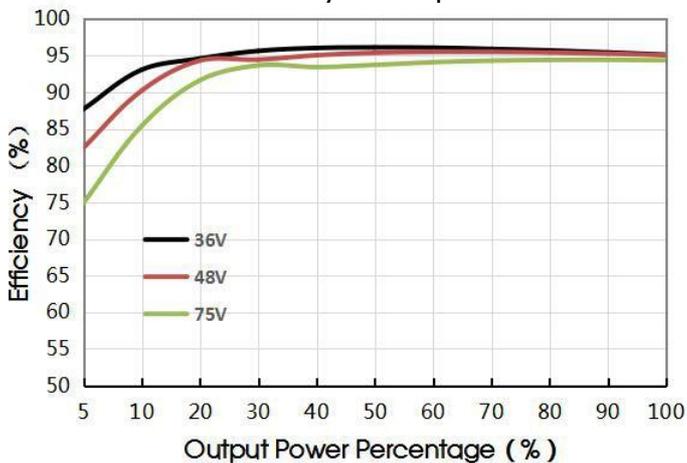


GT4828QBO-400W(F/H)R3(-N)
Efficiency VS Input Voltage

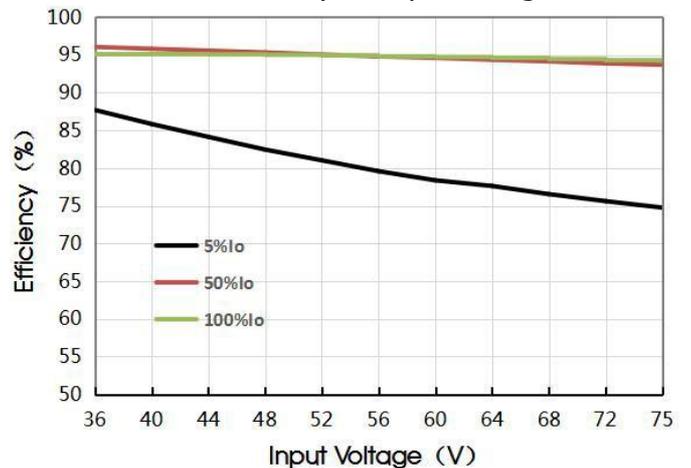


GT4812QBO-400WR3(-N)
Temperature Derating Curves(Vin=48V)

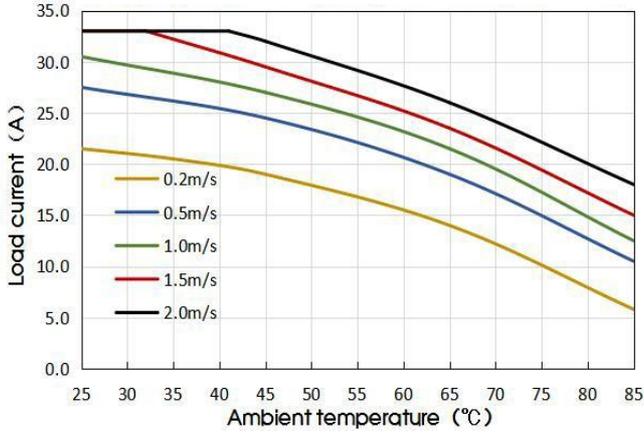


GT4815QBO-400WR3(-N)
Temperature Derating Curves(Vin=48V)

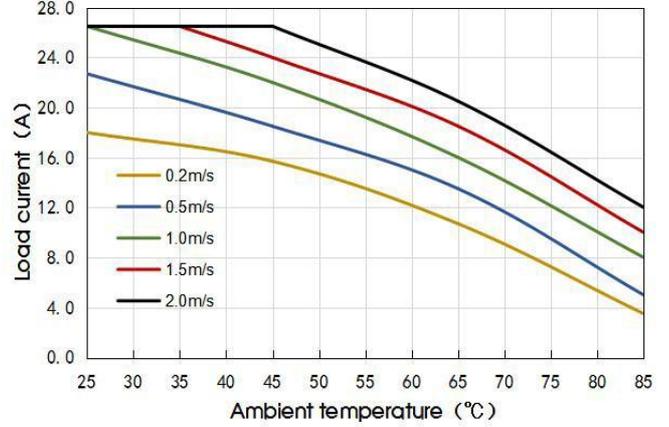


GT4824QBO-400WR3(-N)
Temperature Derating Curves(Vin=48V)

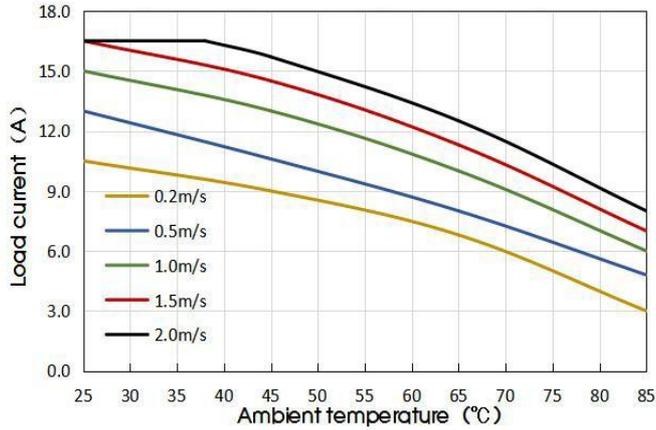


GT4828QBO-400WR3(-N)
Temperature Derating Curves(Vin=48V)

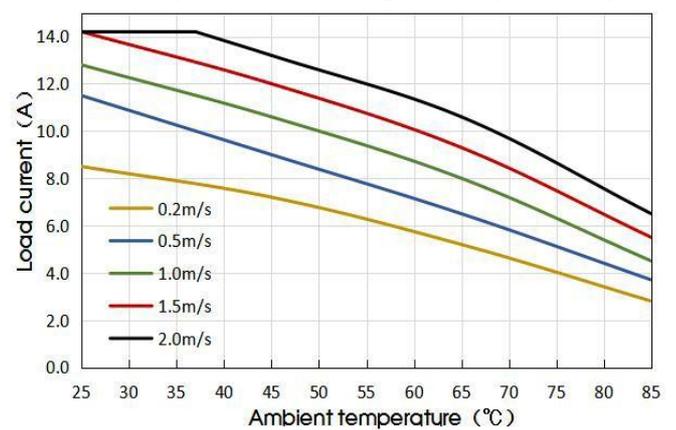

GT4812QBO-400WHR3(-N)
Temperature Derating Curves(Vin=48V)

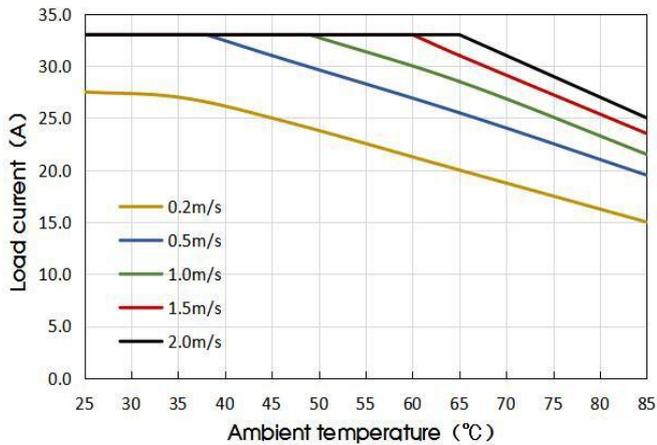

GT4815QBO-400WHR3(-N)
Temperature Derating Curves(Vin=48V)

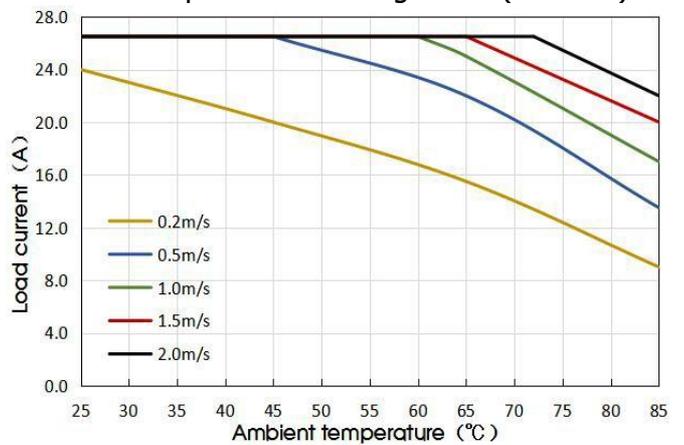

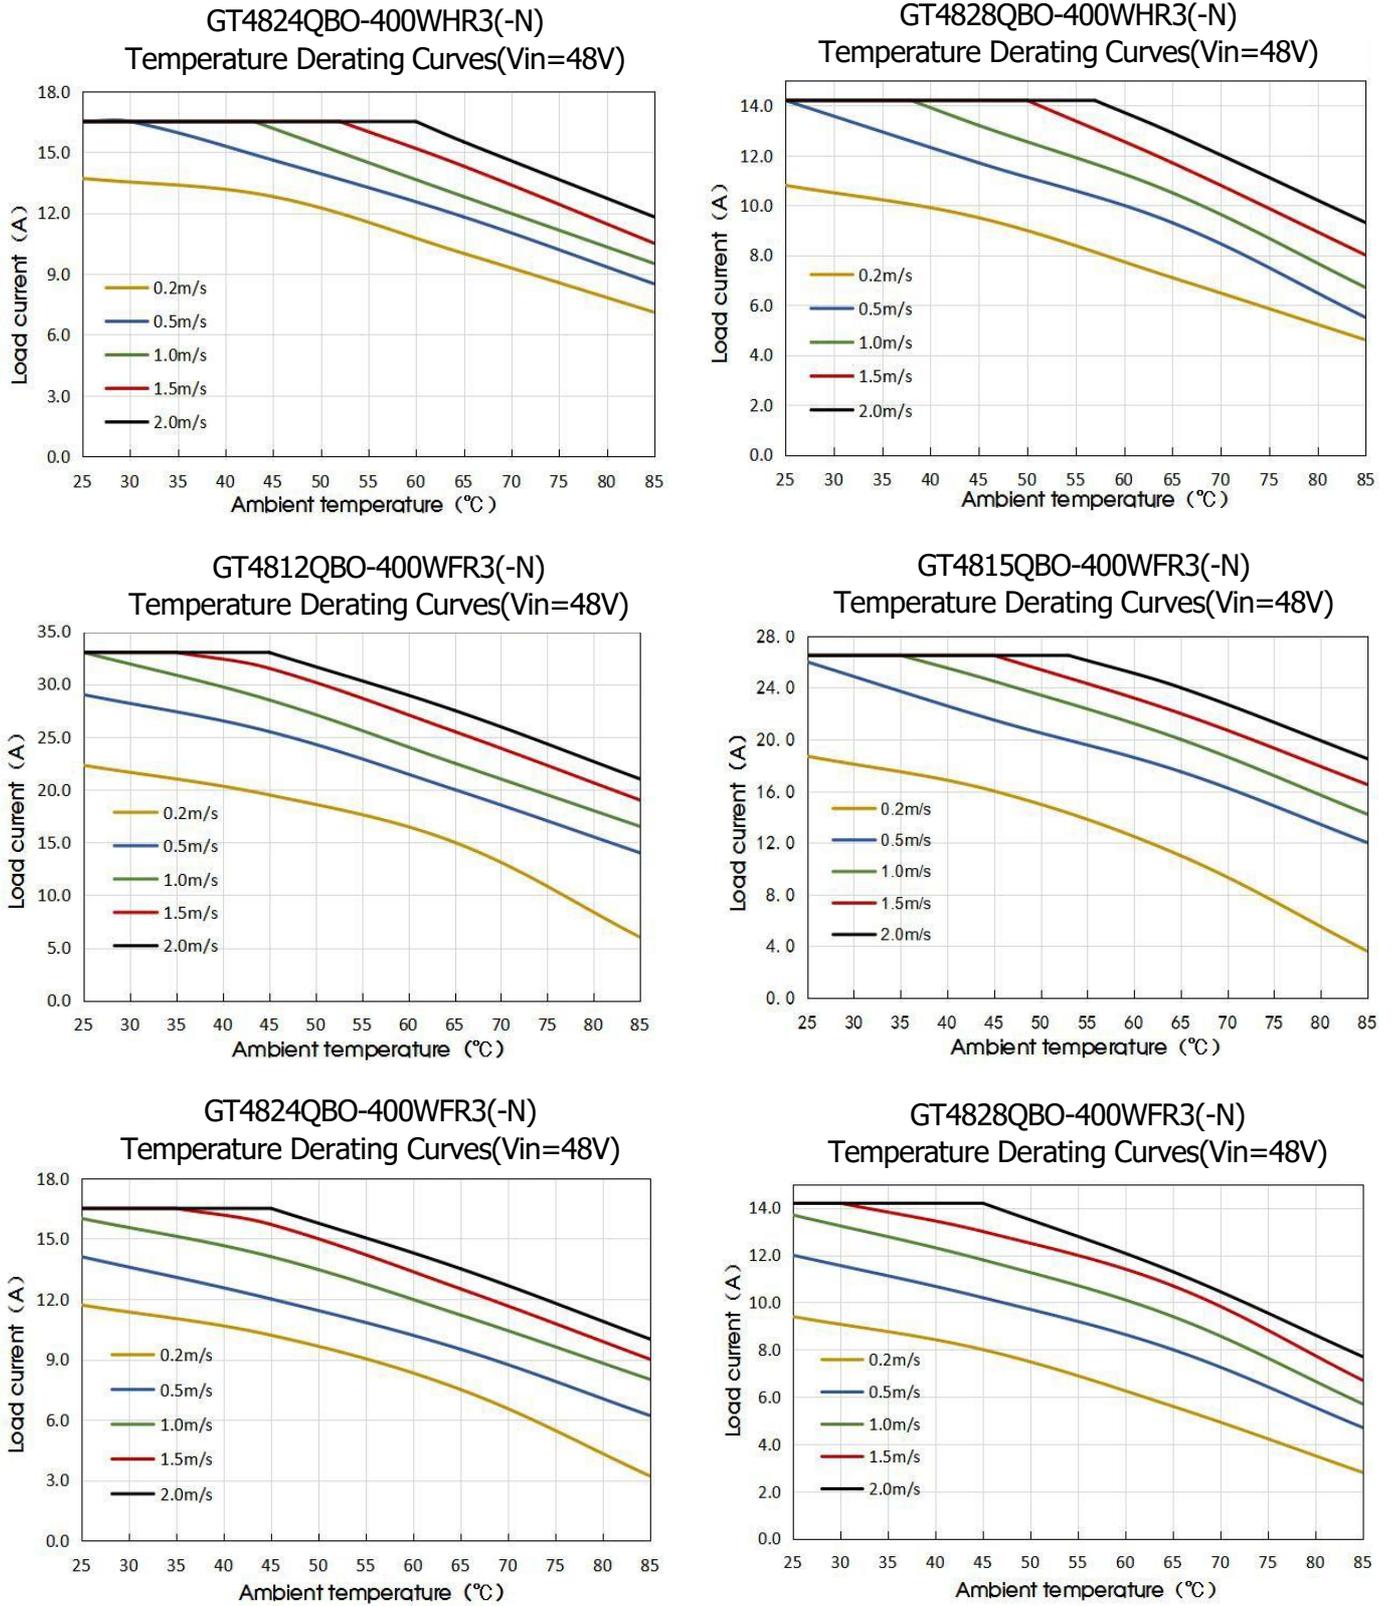


Fig.1

Remote Sense Application

1. Remote Sense Connection if not used

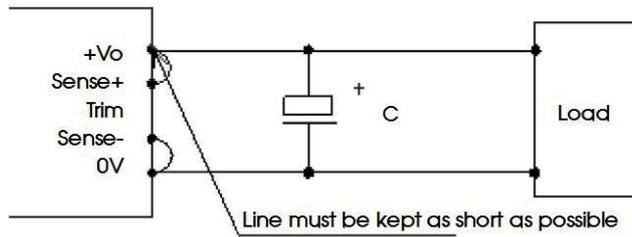


Fig.2

Notes:

- (1) If the sense function is not used for remote regulation the user must connect the +Sense to +Vo and -Sense to 0V at the DC-DC converter pins and will compensate for voltage drop across pins only.
- (2) The connections between sense lines and their respective power lines must be kept as short as possible, otherwise they may be picking up noise, interference and/or causing unstable operation of the power module.

2. Remote Sense Connection used for Compensation

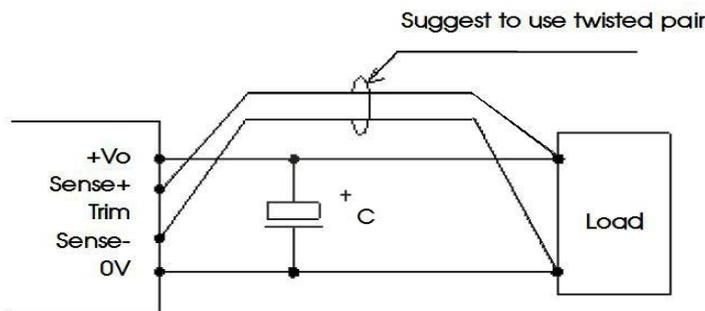


Fig.3

Notes:

- (1) Using remote sense with long wires may cause unstable output, please contact technical support if long wires must be used.
- (2) PCB-tracks or cables/wires for Remote Sense must be kept as short as possible. Twisted pair or shielded wires are suggested for remote compensation and must be kept as short as possible.
- (3) We recommend using adequate cross section for PCB-track layout and/or cables to connect the power supply module to the load in order to keep the voltage drop below 0.3V and to make sure the power supply's output voltage remains within the specified range.
- (4) Note that large wire impedance may cause oscillation of the output voltage and/or increased ripple. Consult technical support or factory for further advice of sense operation.

Design Reference

1. Typical application

We recommended using the recommended circuit shown in Fig.6-1 or Fig.6-2 during product testing and application, otherwise please ensure that at least a 220μF electrolytic capacitor is connected at the input in order to ensure adequate voltage surge suppression, and a minimum capacitive load must be connected at the output in order to ensure the output stability.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Fig.5

Output Voltage	C_{out}	C_{in}
12V/15V/24V/28V	470μF	220 μF

2. EMC compliance circuit

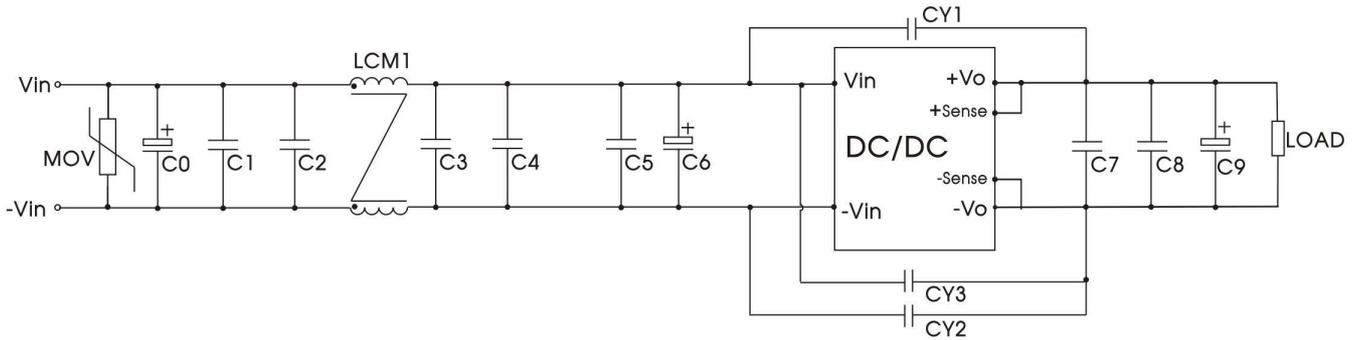


Fig. 6-1

Components	Recommended Component Value
MOV	14D101K Varistor
C0	680 μ F/100V electrolytic capacitor
C6	470 μ F/100V electrolytic capacitor
C9	470 μ F/63V electrolytic capacitor
C1, C2, C3, C4, C5, C7, C8	4.7 μ F/100V ceramic capacitor
LCM1	T24 x 23.5 x 19/4mH/35m Ω max
CY1, CY2, CY3	1nF/400VAC Y safety capacitor


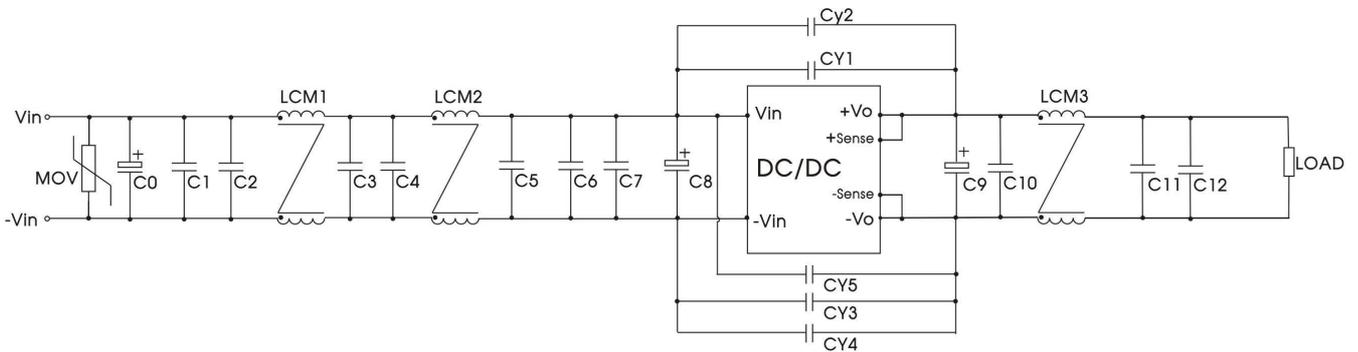


Fig. 6-2

Components	Recommended Component Value
MOV	14D101K Varistor
C0	680 μ F/100V electrolytic capacitor
C8	470 μ F/100V electrolytic capacitor
C9	470 μ F/63V electrolytic capacitor
C1, C2, C3, C4, C5, C6, C7, C10, C11, C12	4.7 μ F/100V ceramic capacitor
LCM1, LCM2	T24 x 23.5 x 19/4mH/35m Ω max
LCM3	T28 x 27.5 x 12/100uH/5m Ω max
CY1, CY2, CY3, CY4, CY5	1nF/400VAC Y safety capacitor

3. Trim function for output voltage adjustment (open if unused)

Calculation formula of Trim resistance:

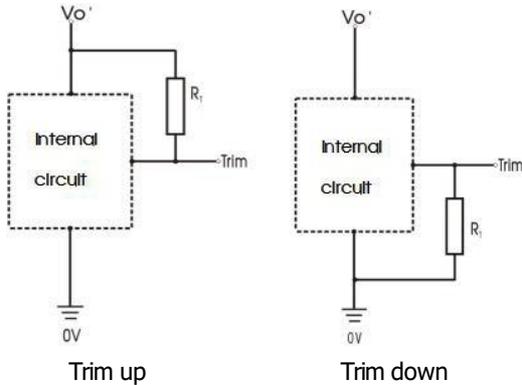

Trim up
Trim down
TRIM resistor connection (dashed line shows internal resistor network)
Fig. 7

Trim up

$$R_T = \left(\frac{5.11V_{nom}(100 + \Delta\%)}{1.225\Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) (k\Omega)$$

Trim down

$$R_T = \left(\frac{511}{\Delta\%} \right) - 10.22 (k\Omega)$$

Note:

R_T: Resistance of Trim.

$$\Delta\% = \left| \frac{V_{nom} - V_{out}}{V_{nom}} \right| \times 100$$

V_{nom}: Nominal Input Voltage.

V_{out}: The trim up/down voltage.

4. Recommended solution for thermal testing

During the application process, the thermal design of the product can be evaluated in combination with the temperature derating curve of the product, or it can be determined by testing the temperature at point A, it is a safe operating area if the temperature lower than 125°C.

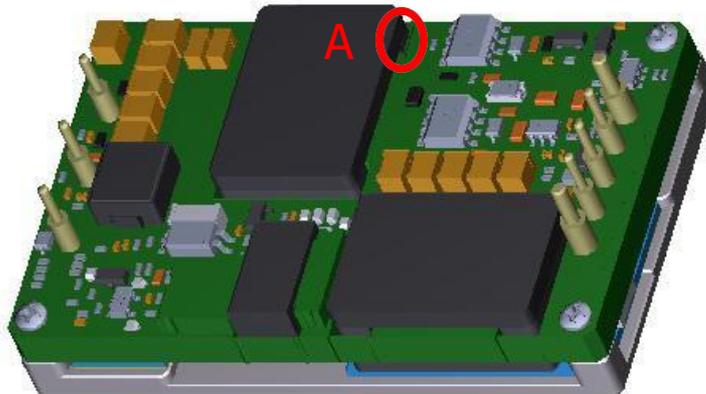


Fig. 8

5. Reflected ripple current test circuit

All DC-DC converters of this series are tested using the recommended circuit shown in Fig. 9.


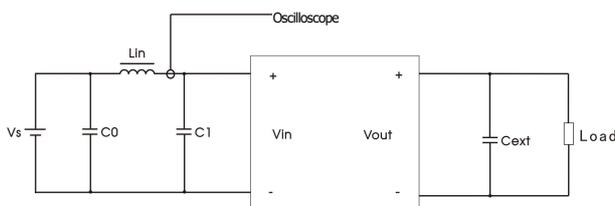


Fig. 9


Components	Recommended Component Value
C0	220μF/100V
Lin	10uH/15A
C1	470μF/100V
Cext	470μF/63V

6. The products do not support parallel connection of their output


GT48_QBO-400WR3 Dimensions and Recommended Layout

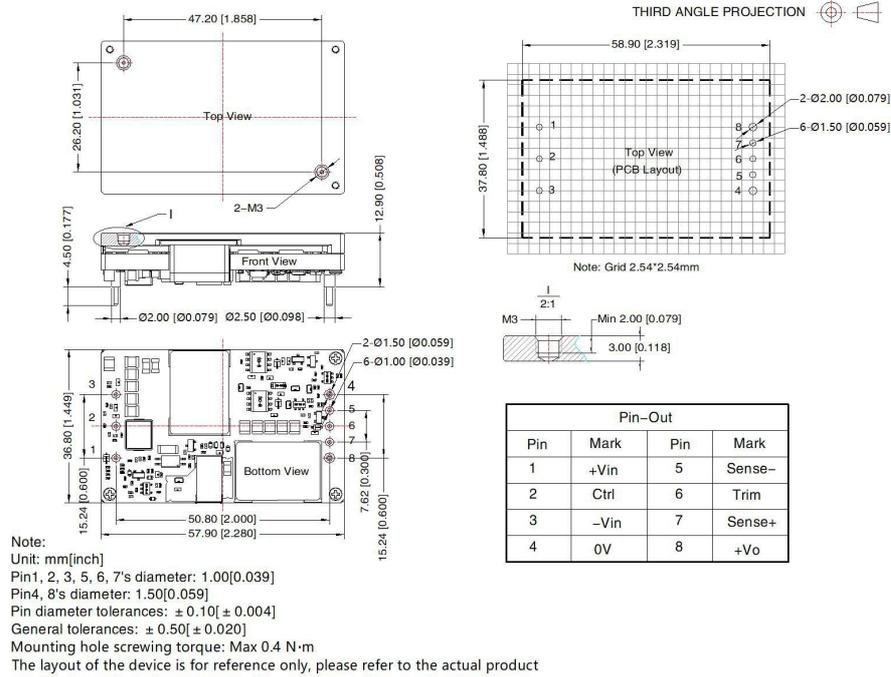


GT48_QBO-400WR3-N Dimensions and Recommended Layout

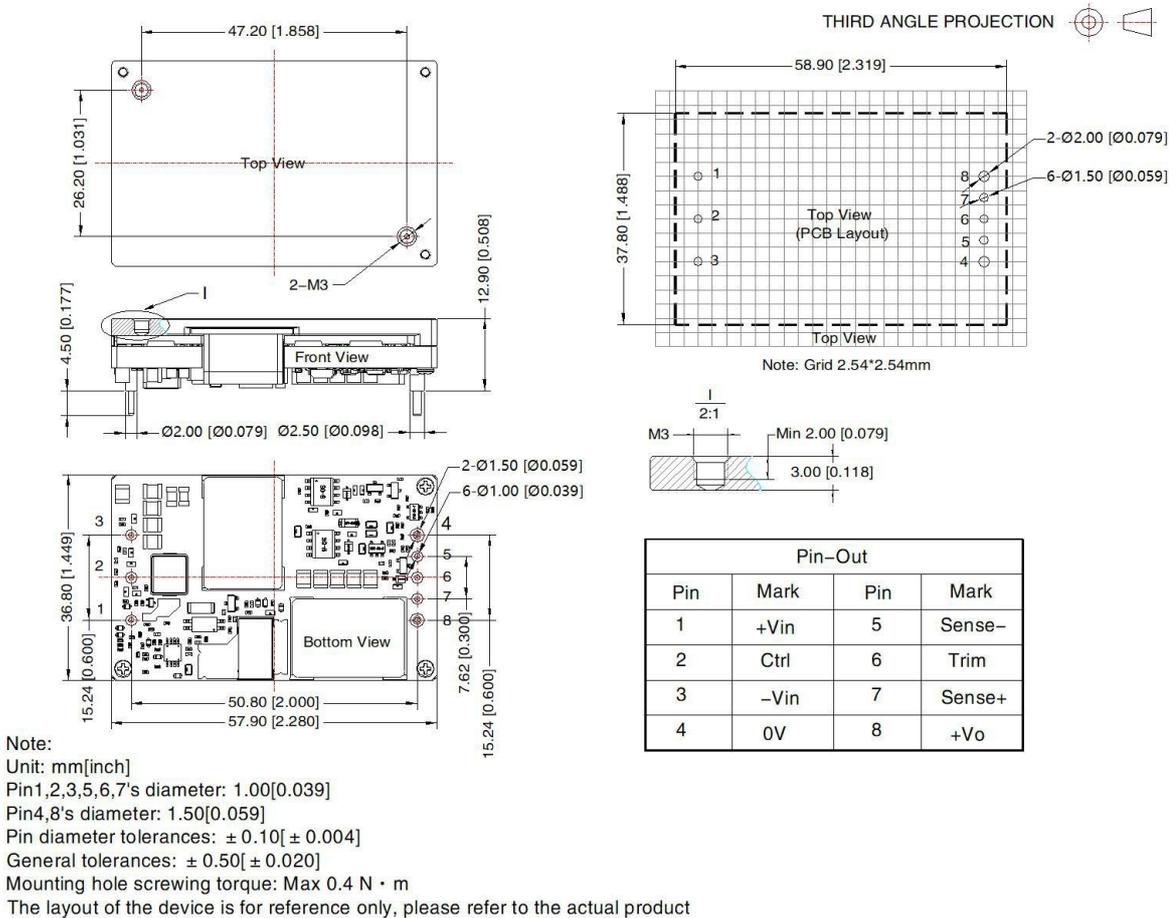


GT48_QBO-400WHR3 Dimensions and Recommended Layout

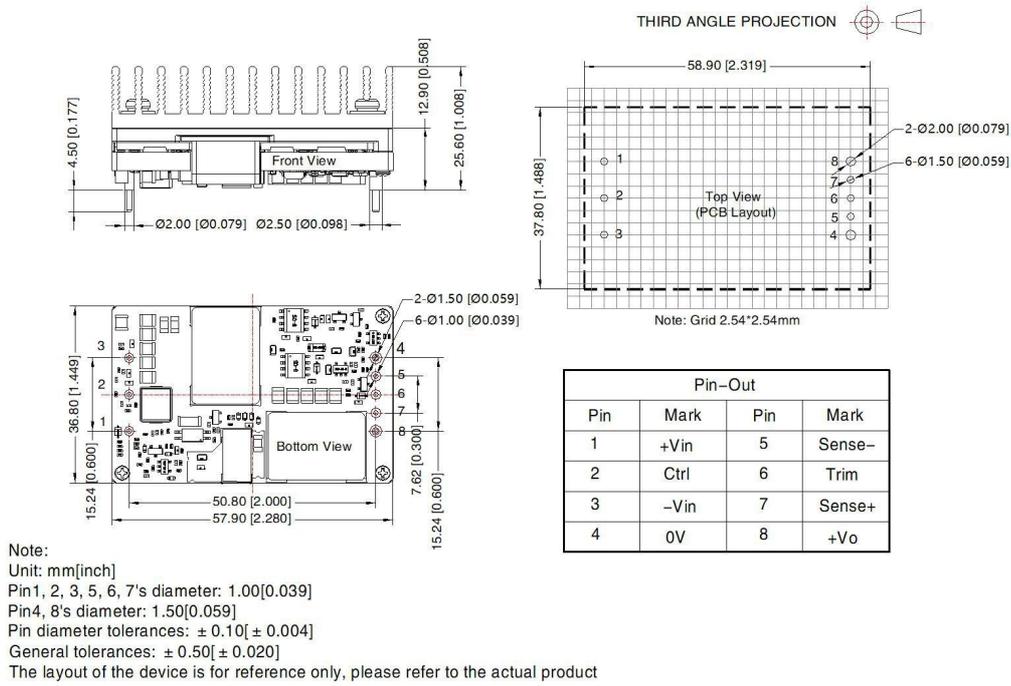

GT48_QBO-400WHR3-N Dimensions and Recommended Layout

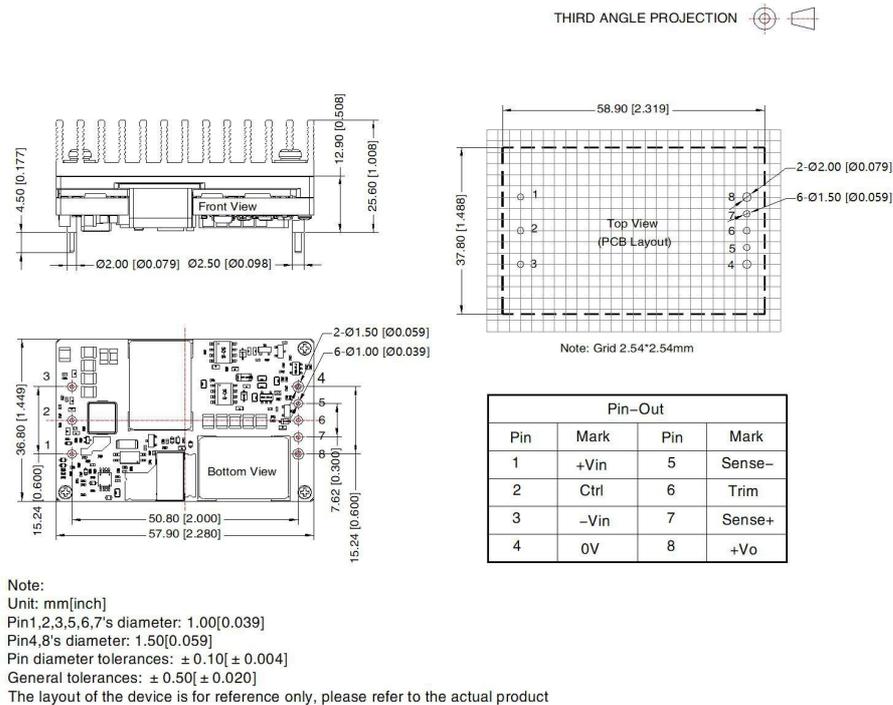


GT48_QBO-400WFR3 Dimensions and Recommended Layout

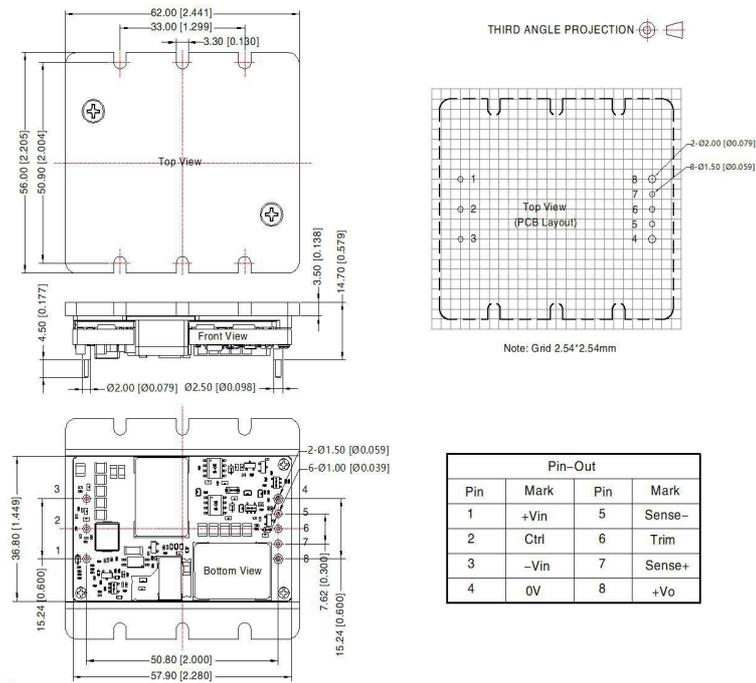

Note:
 Unit: mm[inch]
 Pin1, 2, 3, 5, 6, 7's diameter: 1.00[0.039]
 Pin4, 8's diameter: 1.50[0.059]
 Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 0.50[\pm 0.020]$
 The layout of the device is for reference only, please refer to the actual product

GT48_QBO-400WFR3-N Dimensions and Recommended Layout

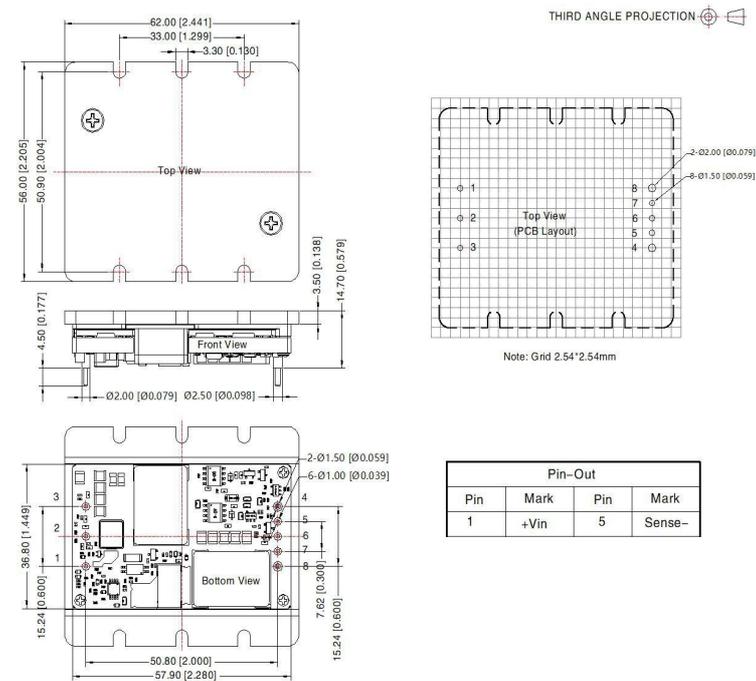

Note:
 Unit: mm[inch]
 Pin1,2,3,5,6,7's diameter: 1.00[0.039]
 Pin4,8's diameter: 1.50[0.059]
 Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 0.50[\pm 0.020]$
 The layout of the device is for reference only, please refer to the actual product

Notes:

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
2. The maximum capacitive load is tested under the input voltage range and full load condition;
3. Unless otherwise stated, all indexes in this manual are measured at $T_a=25^{\circ}\text{C}$, humidity $<75\%RH$, nominal input voltage and rated output load;
4. All index testing methods in this manual are based on the enterprise standards of the company;
5. Our company can provide product customization, specific needs can directly contact our technical staff;
6. AMCHARD reserves the right to make changes to the product at any time without notice.

GUANGZHOU AMCHARD-POWER TECHNOLOGY CO., LTD.www.amchard-power.comMail:info@amchard-power.com