


## Product Feature

- 1.Package Type: DIP24
- 2.Universal Input: 2:1
- 3.Operating temperature range : -40°C - +85°C
- 4.Isolation voltage : 3000VDC
- 5.High efficiency up to: 86% (Type)
- 6.Input under-voltage protection; Output short-circuit protection, over-voltage protection, over-current protection mechanism.
- 7.Fields of application : Industry, Power, Instrumentation, Communication, Rail transit.

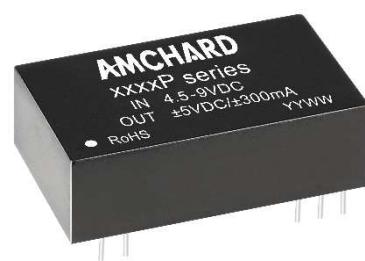

3 years  
Warranty

## Selection Guide

Part No.	Input Voltage (VDC)		Output		Full Load Efficiency% (Typ.)	Capacitive Load(µF) Max.
	Nominal (Range)	Max.	Voltage (VDC)	Current (mA) Max./Min.		
BTF0505P-3WR2	5 (4.5-9)	11	5	600/30	74	4700
BTF0512P-3WR2	5 (4.5-9)	11	12	250/12	77	2700
BTF0515P-3WR2	5 (4.5-9)	11	15	200/10	77	2200
BTE0505P-3WR2	5 (4.5-9)	11	±5	±300/±15	76	2200#
BTE0512P-3WR2	5 (4.5-9)	11	±12	±125/±6	78	1800#
BTE0515P-3WR2	5 (4.5-9)	11	±15	±100/±5	78	1000#
BTF1203P-3WR2	12 (9-18)	20	3.3	909/46	74	4700
BTF1205P-3WR2	12 (9-18)	20	5	600/30	81	4700
BTF1212P-3WR2	12 (9-18)	20	12	250/12	83	2700
BTF1215P-3WR2	12 (9-18)	20	15	200/10	82	2200
BTF1224P-3WR2	12 (9-18)	20	24	125/6	83	1800
BTE1205P-3WR2	12 (9-18)	20	±5	±300/±15	81	2200#
BTE1209P-3WR2	12 (9-18)	20	±9	±166/±8	84	2000#
BTE1212P-3WR2	12 (9-18)	20	±12	±125/±6	84	1800#
BTE1215P-3WR2	12 (9-18)	20	±15	±100/±5	85	1000#
BTF2403P-3WR2	24 (18-36)	40	3.3	909/46	78	4700
BTF2405P-3WR2	24 (18-36)	40	5	600/30	81	4700
BTF2409P-3WR2	24 (18-36)	40	9	333/16	81	2700
BTF2412P-3WR2	24 (18-36)	40	12	250/12	86	2700
BTF2415P-3WR2	24 (18-36)	40	15	200/10	86	2200
BTF2424P-3WR2	24 (18-36)	40	24	125/6	85	1800
BTE2405P-3WR2	24 (18-36)	40	±5	±300/±15	82	2200#
BTE2412P-3WR2	24 (18-36)	40	±12	±125/±6	84	1800#
BTE2415P-3WR2	24 (18-36)	40	±15	±100/±5	84	1000#
BTF4803P-3WR2	48 (36-75)	80	3.3	909/46	76	4700

BTF4805P-3WR2	48 (36-75)	80	5	600/30	82	4700
BTF4812P-3WR2	48 (36-75)	80	12	250/12	86	2700
BTF4815P-3WR2	48 (36-75)	80	15	200/10	86	2200
BTE4805P-3WR2	48 (36-75)	80	±5	±300/±15	82	2200#
BTE4812P-3WR2	48 (36-75)	80	±12	±125/±6	84	1800#
BTE4815P-3WR2	48 (36-75)	80	±15	±100/±5	85	1000#

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load/no load)	5VDC Input	--	789/40	834/45	mA
	12VDC Input	--	316/30	348/35	
	24VDC Input	--	152/15	165/20	
	48VDC Input	--	77/5	85/10	
Reflected Ripple Current	5VDC Input	--	20	--	mA
	12VDC Input	--	30	--	
	24VDC Input	--	30	--	
	48VDC Input	--	30	--	
Input impulse voltage	5VDC Input	-0.7	--	12	VDC
	12VDC Input	-0.7	--	25	
	24VDC Input	-0.7	--	50	
	48VDC Input	-0.7	--	100	
Starting voltage	5VDC Input	--	--	4.5	VDC
	12VDC Input	--	--	9	
	24VDC Input	--	--	18	
	48VDC Input	--	--	36	
Input Filter					Capacitance Filter
Hot Plug					Unavailable

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy		--	±1.0	±3.0	%	
Accuracy of no-load output voltage	Input voltage range	--	±1.5	±5.0	%	
Linear Regulation	Input voltage from low limit to high limit, full load	--	±0.2	±0.5	%	
Load Regulation	5%- 100% load	--	±0.2	±0.5	%	
Ripple & Noise	25% load step change, nominal input voltage	24V output	--	100	120	mVp-p
		Others	--	50	80	
Transient Recovery Time	25% load step change	--	0.5	2	%	
Transient response deviation	25% load step change	--	±2	±5	%	

Temperature Drift Coefficient	Full Load	--	±0.02	±0.03	%/°C
Short-Circuit Protection	Input voltage range				Continuous, Self-Recovery

**Note:** 1.Auxiliary circuit output voltage(Vo2) maximum accuracy is ±5%;

2.Load regulation for 0%-100% load is ±5%;

## General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, test time 1 minute, leakage current less than 1mA	3000	--	--	VDC
Insulation Resistance	Input-output, insulated voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	--	1000	--	pF
Operating Temperature	Derating when operating temperature≥85°C, (See Figure 1)	-40	--	85	°C
Storage Temperature		-55	--	125	°C
Case Temperature Rise	Ta=25°C, nominal input, output load	--	25	--	°C
Pin welding can withstand the highest temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300	°C
Storage Humidity	Non-condensing	--	--	95	%RH
Switching Frequency	Full load, nominal input voltage	--	200	--	kHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K Hours

## Mechanical Specification


Case Material	Black flame retardant and heat-resistant plastic (UL 94V-0)
Package Dimensions	31.80 × 20.00 × 12.60mm
Weight	12.70g(Typ.)
Cooling Method	Free air convection

## EMC Specifications


EMI	CE	CISPR32/EN55032 CLASS A (without extra components)/ CLASS B (Recommended circuit diagram 3-②)		
	RE	CISPR32/EN55032	CLASS A (without extra components)/ CLASS B (Recommended circuit diagram 3-②)	
EMS	ESD	IEC/EN61000-4-2	Contact±4KV	Perf.Criteria B
	RS	IEC/EN61000-4-3	10V/m	Perf.Criteria A
	EFT	IEC/EN61000-4-4	±2KV (Recommended circuit diagram 3-①)	Perf.Criteria B
	Surge	IEC/EN61000-4-5	line to line±2KV (Recommended circuit diagram 3-①)	Perf.Criteria B
	CS	IEC/EN61000-4-6	3Vr.m.s	Perf.Criteria A
	Voltage sag, drop, and short-term interruption immunity	IEC/EN61000-4-29	0% ~70%	Perf.Criteria B

## Typical Characteristic Curves


Temperature Derating Curve (Figure 1)

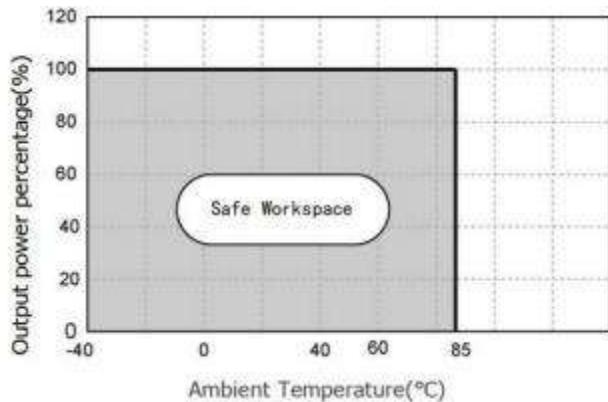


Efficiency VS Input Voltage Curve (Full load)

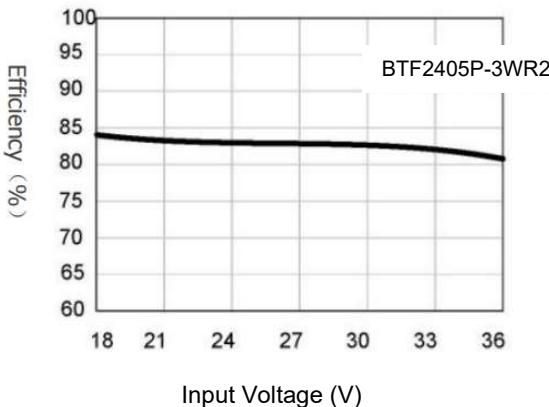


Efficiency VS Output Load (Vin=24V)

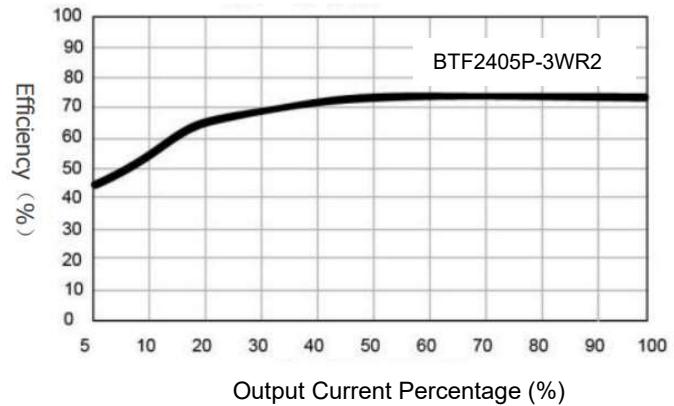

Efficiency VS Input Voltage Curve (Full load)

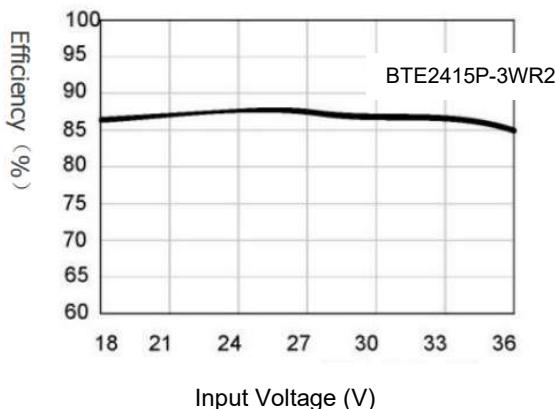


Efficiency VS Output Load (Vin=24V)

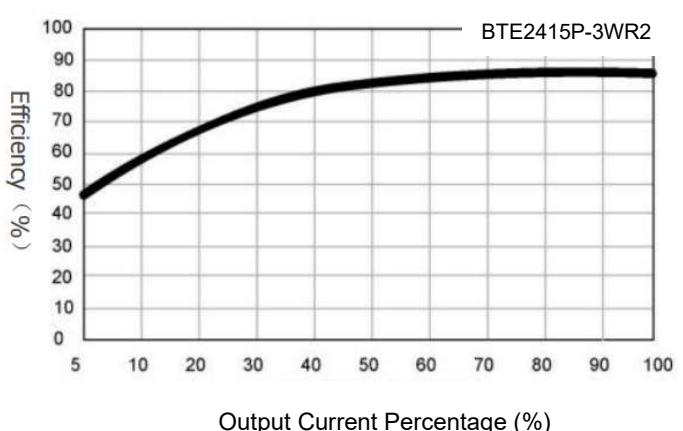

## Typical Circuit Design and Application

Application circuit (Figure 2)		Recommended Capacitive Load Value Table		
Dual	Vin	Vin	5V, 12V	24V, 48V
	Cin	Cin	100uF	10-47uF
	Cout	Cout		10uF
Single	Vin	+Vo		
	GND	-Vo		
	Cin	COM		
	GND			

EMC Solutions - Recommended Circuits (Figure 3)

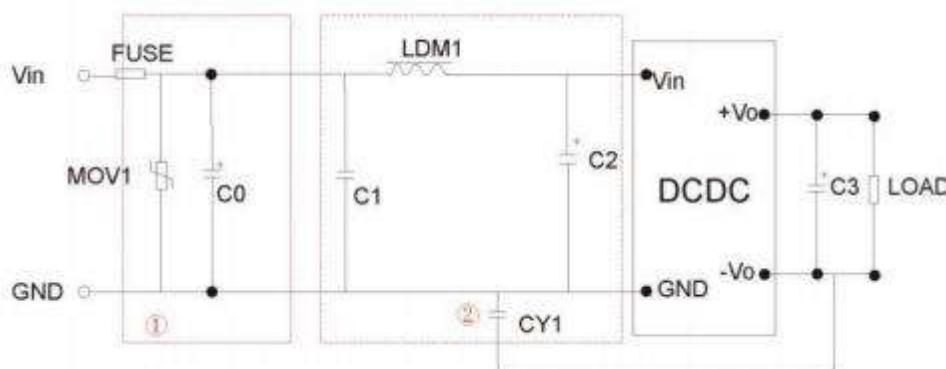

EMI Recommended Parameters Table


MODEL	Vin : 5V	Vin : 12V	Vin : 24V	Vin: 48V
FUSE	Select based on the actual input current of the customer			
MOV	--	14D330K	20D470K	14D101K
LDM1	12uH			
C0	1000uF/16V	1000uF/25V	330uF/50V	330uF/100V
C1	4.7uF/50V			4.7uF/ 100V
C2	4.7uF/50V			4.7uF/ 100V
C3	10uF			
CY1	1nF/3KV			

Application circuit description:

1. All DC/DC converters in this series are tested according to the recommended testing circuit (Figure 2) before leaving the factory.
2. If further reduction of input and output ripple is required, the external capacitance C in can be connected to the input and output Cout increases or selects capacitors with small series equivalent impedance values, but the capacitance value cannot exceed the maximum capacitive load of the product.


## Dimensions and Recommended Layout

Dimensions

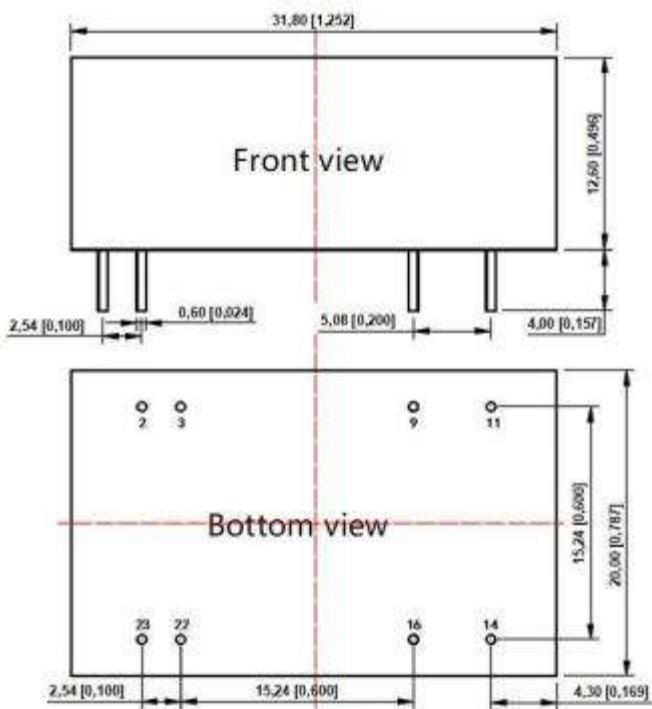

Note:  
Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10 [\pm 0.004]$   
General tolerances:  $\pm 0.50 [\pm 0.020]$

PCB Printing Layout

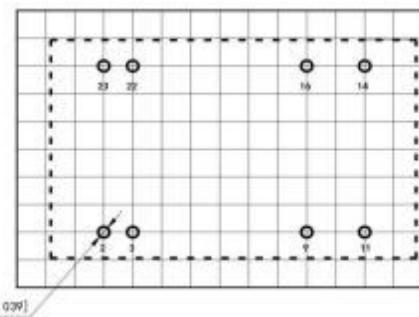

The grid distance is 2.54mm x 2.54mm

Pin Definition Table

Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No pin	Com
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Com
22	+Vin	+Vin
23	+Vin	+Vin

NC: Pin to be isolated from circuitry

### Note:

1. The input voltage should not exceed the specified range value, otherwise it may cause permanent and irreparable damage;
2. It is recommended to use at a load of over 5%. If the load is below 5%, the ripple index of the product may exceed the specifications, but it does not affect the reliability of the product;
3. Suggested dual output module load imbalance:  $\leq \pm 5\%$ . If it exceeds  $\pm 5\%$ , it cannot be guaranteed that the product performance meets all performance indicators in this manual;
4. The maximum capacitive load is tested within the input voltage range and under full load conditions;
5. Unless otherwise specified, all indicators in this manual are measured at  $T_a=25^{\circ}\text{C}$ , humidity < 75% RH, nominal input voltage, and output rated load;
6. All indicator testing methods in this manual are based on our company's corporate standards;
7. Our company can provide product customization, and specific requirements can be directly contacted by our technical personnel;
8. Product specifications are subject to change without prior notice.