


Product Feature

1. Package Type: SIP8
2. Operating Temperature Range: -40°C - +85°C
3. Isolation Voltage: 1500VDC
4. 2:1 Wide Input Voltage Range
5. High efficiency up to 88%
6. With the input undervoltage protection, output short circuit protection and output overcurrent protection mechanism
7. Fields of application: industry, industrial control, instrumentation, communication, rail transit, etc

3 years
Warranty**Selection Guide**

Part No.	Input Voltage (VDC)		Output		Full Load Efficiency% (Min./Typ.)	Capacitive Load Max. (μF)
	Nominal (Range)	Maximum	Voltage (VDC)	Current Max.(mA)		
GTB1203S-10WR3	12 (9-18)	20	3.3	2400/0	81/83	2200
GTB1205S-10WR3			5	2000/0	84/86	2200
GTB1209S-10WR3			9	1111/0	84/86	680
GTB1212S-10WR3			12	833/0	84/86	470
GTB1215S-10WR3			15	667/0	84/86	330
GTB1224S-10WR3			24	417/0	84/86	220
GTB2403S-10WR3	24 (18-36)	40	3.3	2400/0	83/85	2200
GTB2405S-10WR3			5	2000/0	86/88	2200
GTB2409S-10WR3			9	1111/0	86/88	680
GTB2412S-10WR3			12	833/0	86/88	470
GTB2415S-10WR3			15	667/0	86/88	330
GTB2424S-10WR3			24	417/0	86/88	220

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load/no load)	12VDC nominal input series, nominal input voltage	3.3VDC Output	--	777/35	796/50	mA
		5VDC Output	--	969/35	992/50	
		Other Output	--	969/9	992/18	
	24VDC nominal input series, nominal input voltage	3.3VDC Output	--	389/25	398/45	
		5VDC Output	--	474/25	485/45	
		Other Output	--	474/9	485/18	
Reflected Ripple Current			--	50	--	
Impulse Voltage	12VDC Nominal Input Series		-0.7	--	25	VDC
	24VDC Nominal Input Series		-0.7	--	50	

Starting Voltage	12VDC Nominal Input Series	--	--	9	
	24VDC Nominal Input Series	--	--	18	
Input Undervoltage Protection	12VDC Nominal Input Series	5.5	6.5	--	
	24VDC Nominal Input Series	12	15.5	--	
Input Filter		Capacitance Filter			
Hot Plug		Unavailable			
CTRL	Module off	0-1.2V turn off			
	Module on	No connect or 3.5-12V on			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	5% - 100% Load		--	±1.5	±2.0	%
Linear Regulation	Full load, Input voltage from low limit to high limit		--	±0.25	±0.5	
Load Regulation	5% - 100% Load		--	±0.5	±1.0	
Transient Recovery Time	25% load step change		--	0.3	0.5	ms
Transient Response Deviation		3.3VDC、5VDC Output	--	±5	±8	%
		Other Output	--	±3	±5	
Temperature Coefficient	Full Load		--	--	±0.03	%/°C
Ripple & Noise	20MHZ Bandwidth,5% - 100% Load 5% - 100% Load		--	75	150	mVp-p
Overcurrent Protection	Input Voltage Range		--	160	230	%Io
Short-circuit Protection			Continuous, Self-Recovery			

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, test time 1 minute, leakage current less than 1mA	1500	--	--	VDC
Insulation Resistance	Input-output, insulated voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	--	1000	--	pF
Operating Temperature	See Figure 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Pin welding can withstand the highest temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C
Switching Frequency	Full Load, Nominal Input Voltage	--	500	--	KHz
MTBF	MIL-HDBK-217F@25°C	>1000Kh			


Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL 94V-0 rated)
Package Dimensions	22.00 * 14.00*10.00 mm
Weight	4.8g (Typ.)
Cooling Method	Free air convection

EMC Specifications



EMI	CE	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 3-②)
	RE	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 3-②)
EMS	ESD	IEC/EN61000-4-2 Contact±4KV perf.Criteria B
	RS	IEC/EN61000-4-3 10V/m Perf.Criteria A
	EFT	IEC/EN61000-4-4 ±2KV (The recommended circuit is shown in Figure 3-①) Perf.Criteria B
	Surge	IEC/EN61000-4-5 line to line±2KV (The recommended circuit is shown in Figure 3-①) Perf.Criteria B
	Cs	IEC/EN61000-4-6 3 Vr.m.s Perf.Criteria A



Typical Characteristic Curves

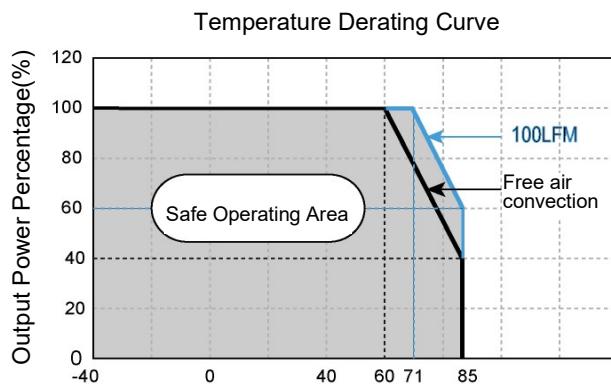


Operating Temperature (°C)

Figure 1

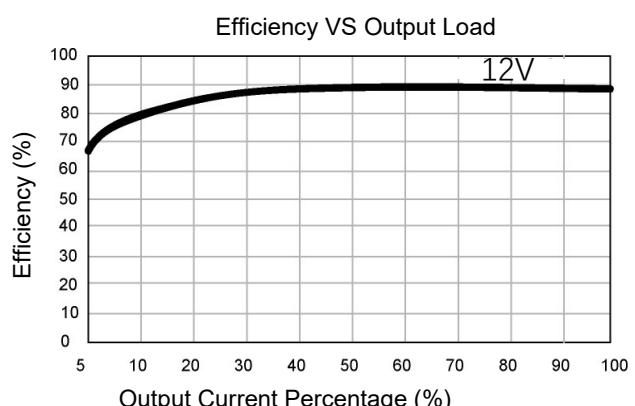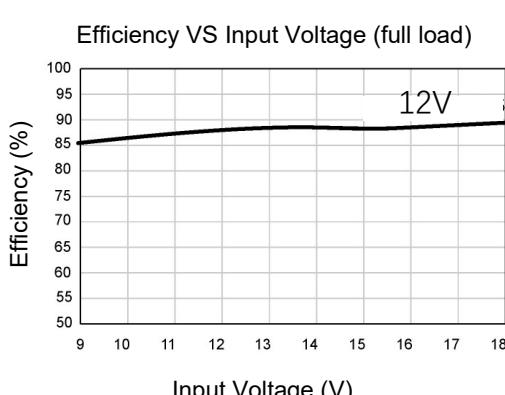

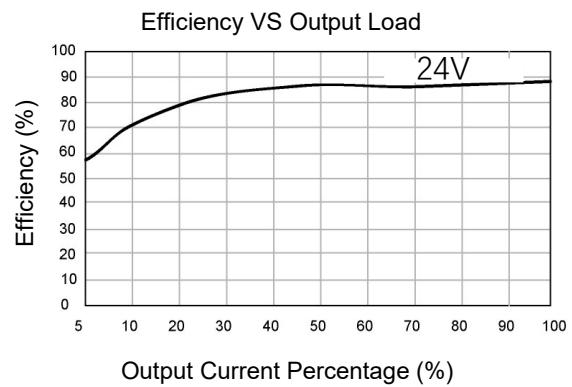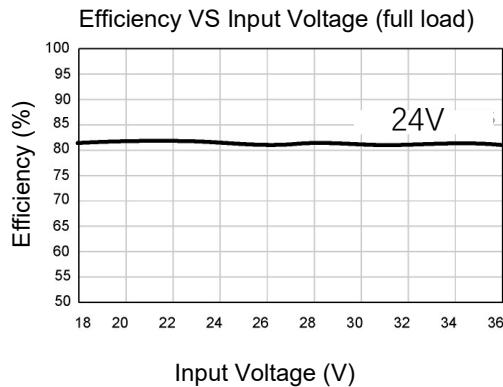


Circuit Design and Application

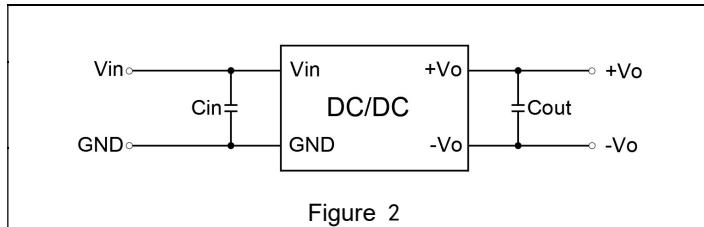

Recommended Capacitive Load Value Table

Cin(μF)	Cout(μF)
47	22

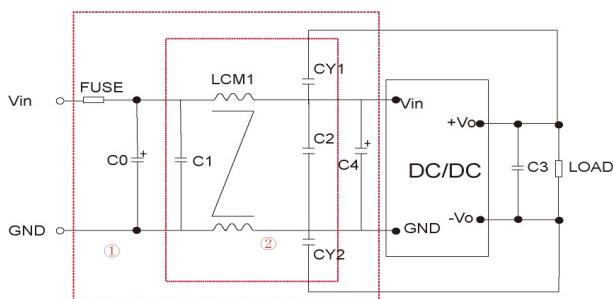

EMI Recommended Parameter Table




Model	Vin:12V	Vin:24V
FUSE	Select according to the actual input current of the customer	
C0、C4	330uF/35V	330uF/50V
C1、C2	10μF/50V	
LCM1	470uH	
C3	Refer to the Cout parameter in Figure 2	
CY1、CY2	1nF/2000VDC	

Note: Part 1 in Figure 3 is for EMC testing; The second part is used for EMI filtering, which can be selected according to the demand

Dimensions and Recommended Layout

Dimensions

PCB Printing Layout & Pin Definition Table

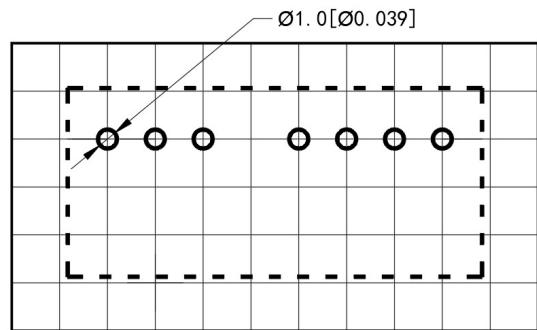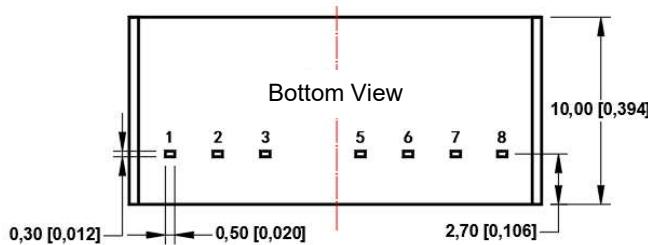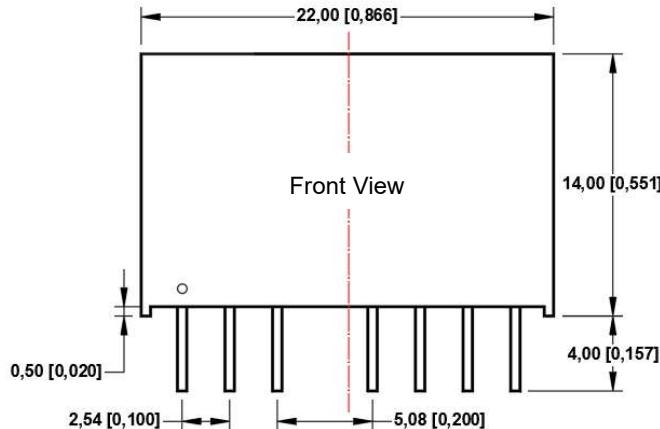

Note: The grid distance is 2.54mm*2.54mm

Pin	Function (single)	Function (double)
1	GND	GND
2	Vin	Vin
3	CTRL	CTRL
5	NC	NC
6	+Vo	+Vo
7	-Vo	COM
8	NC	-Vo

NC: Pin to be isolated from circuitry

Note:

Unit: mm[inch]

Pin section tolerances: $\pm 0.10 [\pm 0.004]$

General tolerances: $\pm 0.50 [\pm 0.020]$

Note:

1. The input voltage cannot exceed the specified range value, otherwise permanent and irreparable damage may be caused ;
2. Unless otherwise specified, the parameters in this datasheet were measured at 25°C, humidity 40%~75%, input nominal voltage and output pure resistance mode under full load;
3. All index test methods are based on our company's enterprise standards.

DONGGUAN AMCHARD-POWER TECHNOLOGY CO., LTD.

www.amchard-power.com

Mail:info@amchard-power.com