


Product Feature

1. Compact SIP8 Package
2. Operating Temperature Range: -40°C - +105°C
3. I/O Isolation Test Voltage 1.6KVDC
4. Wide 2:1 Input Voltage Range
5. High efficiency up to 87%
6. With the input undervoltage protection, output short-circuit protection and overcurrent protection mechanism
7. Fields of application: electric power, industrial control, communication, Internet of Things, automobile, rail transit, etc

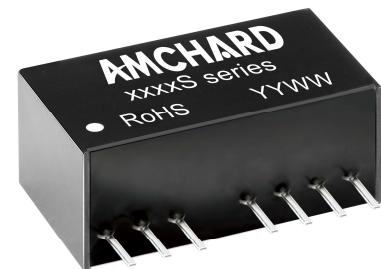

3 years
Warranty

Selection Guide

Part No.	Input Voltage(VDC)		Output		Full Load Efficiency% (Typ.)	Capacitive Load Max. (μF)
	Nominal (Range)	Maximum	Voltage (VDC)	Current(mA) Max./Min.		
GTB0505S-6WR3	5 (4.5-9)	12	5	1200/0	80	1000
GTB0512S-6WR3			12	500/0	84	470
GTB0515S-6WR3			15	400/0	84	220
GTB0524S-6WR3			24	250/0	84	100
GTA0505S-6WR3			±5	±500/0	80	#500
GTA0512S-6WR3			±12	±208/0	84	#220
GTA0515S-6WR3			±15	±167/0	84	#100
GTA0524S-6WR3			±24	±104/0	84	#50
GTB1203S-6WR3	12 (9-18)	20	3.3	1350/0	76	1800
GTB1205S-6WR3			5	1200/0	80	1000
GTB1209S-6WR3			9	667/0	82	470
GTB1212S-6WR3			12	500/0	84	470
GTB1215S-6WR3			15	400/0	84	220
GTB1224S-6WR3			24	250/0	84	100
GTB2403S-6WR3	24 (18-36)	40	3.3	1350/0	78	1800
GTB2405S-6WR3			5	1200/0	82	1000
GTB2409S-6WR3			9	667/0	84	470
GTB2412S-6WR3			12	500/0	86	470
GTB2415S-6WR3			15	400/0	87	220
GTB2424S-6WR3			24	250/0	85	100
GTB4805S-6WR3	48 (36-75)	80	5	1200/0	81	1000
GTB4809S-6WR3			9	667/0	83	470
GTB4812S-6WR3			12	500/0	85	470
GTB4815S-6WR3			15	400/0	86	330
GTB4824S-6WR3			24	250/0	84	100

each output

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load/no load)	5VDC nominal input series, nominal input voltage		--	1538/28	1579/45	mA
	12VDC nominal input series, nominal input voltage	3.3VDC Output	--	489/12	502/18	
		Other Output	--	625/12	641/18	
	24VDC nominal input series, nominal input voltage	3.3VDC Output	--	238/5	245/12	
		5VDC Output	--	305/5	313/12	
		Other Output	--	305/10	313/16	
	48VDC nominal input series, nominal input voltage		--	156/5	160/12	
Reflected Ripple Current			--	50	--	
Impulse Voltage	5VDC nominal input series		-0.7	--	12	VDC
	12VDC nominal input series		-0.7	--	25	
	24VDC nominal input series		-0.7	--	50	
	48VDC nominal input series		-0.7	--	100	
Starting Voltage	5VDC nominal input series		--	--	4.5	
	12VDC nominal input series		--	--	9	
	24VDC nominal input series		--	--	18	
	48VDC nominal input series		--	--	36	
Undervoltage Protection	5VDC nominal input series		--	--	4.5	
	12VDC nominal input series		5.5	6.5	--	
	24VDC nominal input series		12	15.5	--	
	48VDC nominal input series		26	30	--	
Input Filter	Capacitance Filter					
Hot Plug	Unavailable					
CTRL	Module off		0-1.2V turn off			
	Module on		No connect or 3.5-12V on			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	5% - 100% Load		--	±1.0	±2.0	%
Linear Regulation	Full load, Input voltage from low limit to high limit		--	±0.5	±1.0	
Load Regulation	5% - 100% Load		--	±0.5	±1.5	
Transient Recovery Time	25% load step change			0.3	0.5	ms
Transient Response Deviation		3.3V、5V output		±5	±8	
Deviation		Other voltage output		±3	±5	
Temperature Coeffcient	Full Load		--	--	±0.03	%/°C
Ripple & Noise	20MHz Bandwidth,5% - 100% Load		--	50	100	mVp-p
Over Current Protection	Input Voltage Range		110	160	230	%Io
Short-circuit Protection	Continuous, Self-Recovery					

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, test time 1 minute, leakage current less than 1mA	1600	--	--	VDC
Insulation Resistance	Input-output, insulated voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	--	1000	--	pF
Operating Temperature	Derating when operating temperature $\geq 85^{\circ}\text{C}$, (See Figure 1)	-40	--	+105	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Pin welding can withstand the highest temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C
Switching Frequency	Full load, nominal input voltage	--	500	--	kHz
MTBF	MIL-HDBK-217F@25°C	>1000Kh			

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)
Package Dimensions	22.00 * 9.50 * 12.00 mm
Weight	4.6g(Typ.)
Cooling Method	Free air convection

EMC Specifications

EMI	CE	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 3-②)
	RE	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 3-②)
EMS	ESD	IEC/EN61000-4-2 Contact±4KV perf.Criteria B
	RS	IEC/EN61000-4-3 10V/m Perf.Criteria A
	EFT	IEC/EN61000-4-4 ±2KV (The recommended circuit is shown in Figure 3-①) Perf.Criteria B
	Surge	IEC/EN61000-4-5 line to line±2KV (The recommended circuit is shown in Figure 3-①) Perf.Criteria B
	CS	IEC/EN61000-4-6 3 Vr.m.s Perf.Criteria A

Typical Characteristic Curves






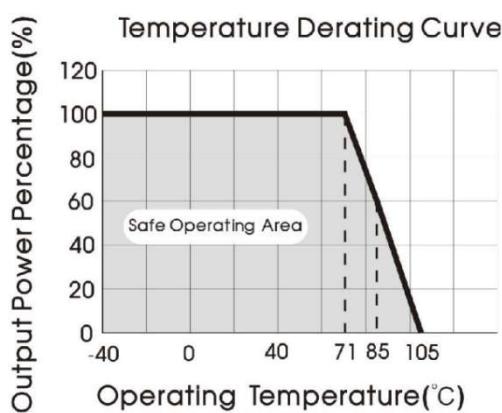



Fig. 1

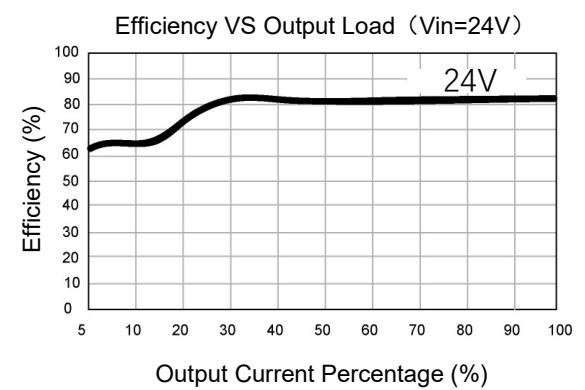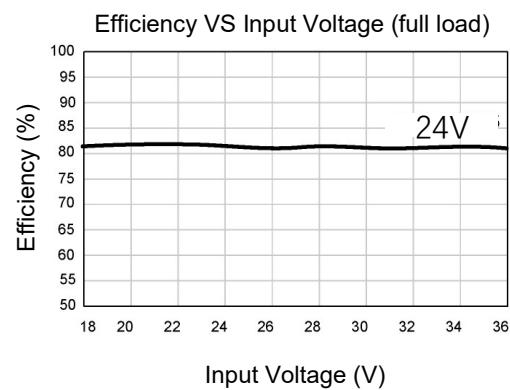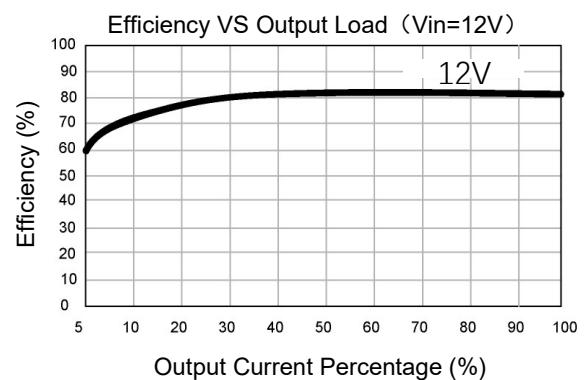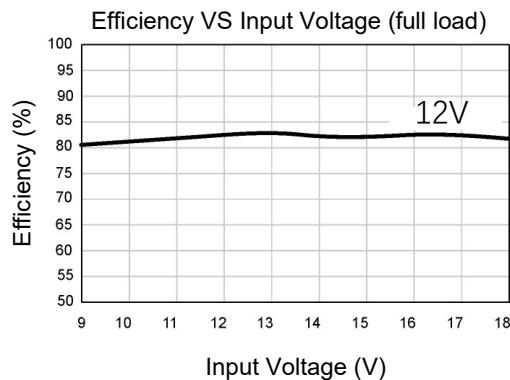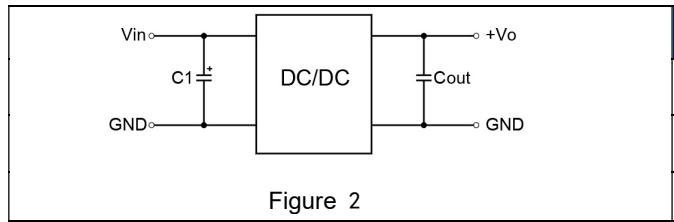

Circuit Design and Application


Recommended Capacitive Load Value Table

$C_{in}(\mu F)$	$C_{out}(\mu F)$
100	22

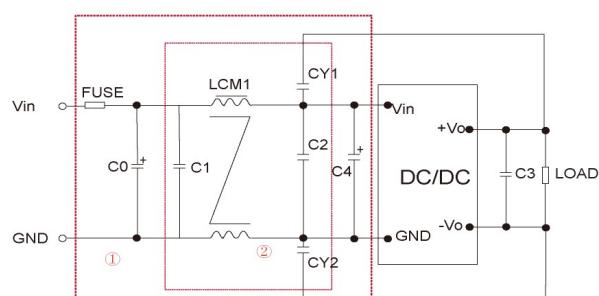
EMI Recommended Parameter Table



Model	$V_{in}:12V$	$V_{in}:24V$
FUSE	Select according to the actual input current of the customer	
C_0, C_4	330uF/35V	330uF/50V
C_1, C_2	10μF/50V	
LCM1		1.4-1.7mH
C_3		22μF/50V
$CY1, CY2$		1nF/400VAC

Note: Part 1 in Figure 3 is for EMC testing; The second part is used for EMI filtering, which can be selected according to the demand.

Dimensions and Recommended Layout

Dimensions

PCB Printing Layout & Pin Definition Table

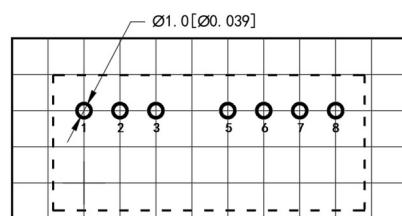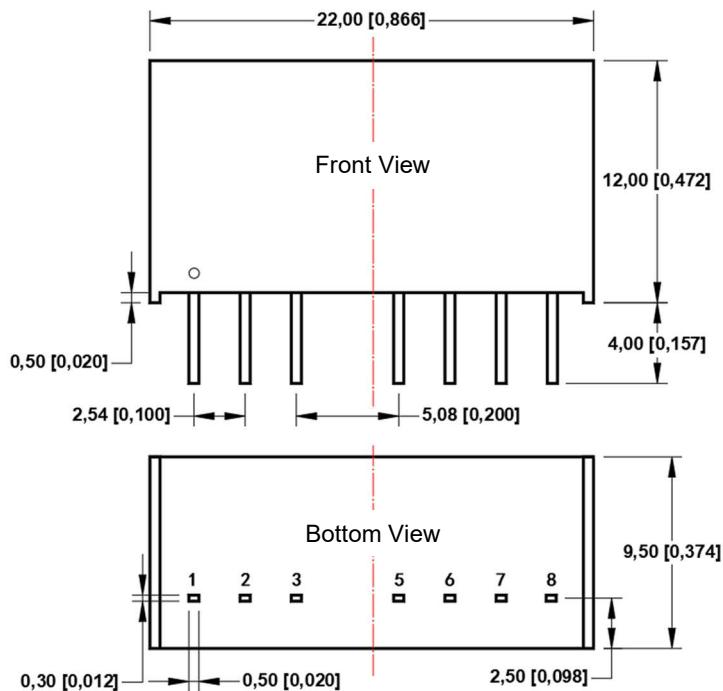

Note: The grid distance is 2.54mm*2.54mm

Pin	Function (single)	Function (double)
1	GND	GND
2	Vin	Vin
3	CTRL	CTRL
5	NC	NC
6	+Vo	+Vo
7	-Vo	COM
8	NC	-Vo

NC: Pin to be isolated from circuitry

Note:

Unit: mm[inch]

Pin section tolerances: $\pm 0.10 [\pm 0.004]$

General tolerances: $\pm 0.50 [\pm 0.020]$

Note:

1. The input voltage cannot exceed the specified range value, otherwise permanent and irreparable damage may be caused ;
2. Unless otherwise specified, the parameters in this datasheet were measured at 25°C, humidity 40%~75%, input nominal voltage and output pure resistance mode under full load;
3. All index test methods are based on our company's enterprise standards.

DONGGUAN AMCHARD-POWER TECHNOLOGY CO., LTD.

www.amchard-power.com

Mail:info@amchard-power.com