


Features


1. No need for external heat sinks
2. Wide operating temperature range: -40°C to +85°C
3. Up to 96% efficiency
4. No load current as low as 0.2mA
5. The pins are compatible with the LM78xx series and can be packaged with straight or curved pins
6. Wide voltage input, output 2000mA, non isolated/stabilized/single output/SIP3 packaging



3 years
Warranty

Model Numbering

K78xx-2000R3(L)

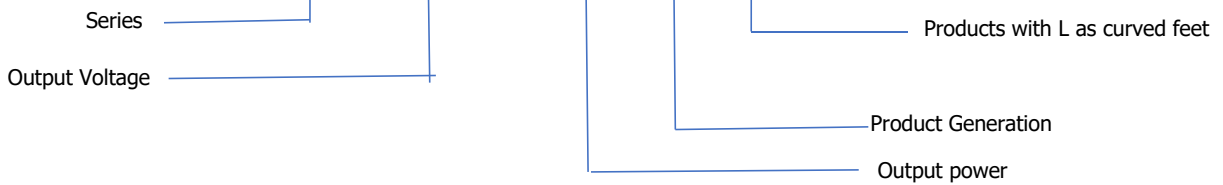

Selection Guide

Part No.	Input Voltage (VDC) Nominal (Range)	Output		Full Load Efficiency(%/Typ.) (Min.Vin/Max.Vin)	Capacitive Load(μF) Max.
		Voltage (VDC)	Current(mA)M ax./Min.		
K7803-2000R3	24(6-36)	3.3	2000/0	87/83	1800
	12(8-31)	-3.3	1000/0	85/83	1000
K7805-2000R3(L)	24(8-36)	5	2000/0	90/87	1000
	12(8-35)	-5	1000/0	86/84	680
K7809-2000R3(L)	24(13-36)	9	2000/0	93/90	680
	12(8-26)	-9	800/0	86/81	330
K7812-2000R3(L)	24(16-36)	12	2000/0	94/92	470
	12(8-23)	-12	600/0	87/85	220
K7815-2000R3	24(18-36)	15	2000/0	95/93	470
	12(8-20)	-15	600/0	87/87	220

Input Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Units
Input current (Rated Load)	Positive output	--	0.1	1	mA
Input filter	Capacitive filtering				
Remarks : This product does not support hot plug					

Output Characteristic

Parameter	Conditions	Min.	Typ.	Max.	Units
Output voltage accuracy		See Figure 1 (envelope curve)			
Linear regulation rate	Input voltage variation+/- 1%	--	+/-2	+/-4	--
Load regulation rate	10% to 100% load	--	+/-0.5	+/-1.5	%
Ripple & Noise	20MHz bandwidth	--	30	75	mVp-p
Temperature drift coefficient	100% load	--	--	+/-0.03	%/°C
Short circuit protection	Sustainable, Self-healing				

General Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Units
Working temperature	Temperature $\geq 85^{\circ}\text{C}$ for derating (See Figure 2)	-40	--	+85	°C
Storage temperature		-55	--	+125	°C
Storage humidity	Non condensing	--	--	95	%RH
Housing temperature rise during operation	Ta=25 °C, Nominal input, Full output	--	15	25	°C
Soldering temperature resistance of pins	The distance from the welding spot to the shell is 1.5mm, 10 seconds	--	--	260	°C
Switching frequency	Full load, Nominal input voltage	--	400	--	kHz
Mean time between failures	MIL-HDBK-217F@25°C	2000	--	--	K Hours

Physical Characteristics

Parameter	Content
Housing material	Black flame retardant and heat-resistant plastic (UL94V-0)
Overall dimensions	11.50 x 9.00 x 17.50 mm
Weight	3.8g(Typ.)
Cooling mode	Natural air cooling

EMC Characteristics

Parameter	Category	Content
EMI	Conductive disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
	Radiation disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
EMS	Electrostatic discharge	IEC/EN61000-4-2 Contact $\pm 6\text{KV}$ perf. Criteria B

Circuit Design and Application

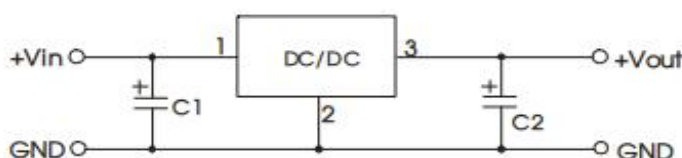


Figure 1: Application circuit

Table 1:
Recommended Capacitive Load Values

Product model	C1	C2
K7803-2000	22 μF /50V	22 μF /10V
K7805-2000		22 μF /10V
K7809-2000		22 μF /16V
K7812-2000		22 μF /25V
K7815-2000		22 μF /25V

Table 2:
Recommended Circuit Parameter Values

project	element	value
EMI	FUSE	Based on actual selection
	C0	100 μF /50V
	LDM1	22 μH
	C4	680pF/50V
	C1、C2	10 μF /50V
	C3	22 μF /25V

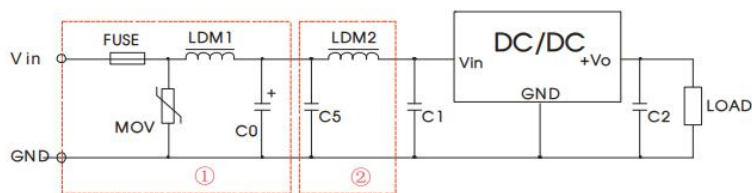


Figure 2: EMC Typical Recommended Circuits

- 1) Typical application: If it is required to further reduce the input and output ripple, a capacitor filter network can be connected at the input and output terminals. The application circuit is shown in Figure 1. However, proper filter capacitor shall be selected. If the capacitance is too large, it may cause startup problems. For each output, under the condition of ensuring safe and reliable operation, the recommended capacitive load values are shown in Table 1.
- 2) Typical EMC recommended circuits are shown in Figure 2.

Product Characteristic Curve

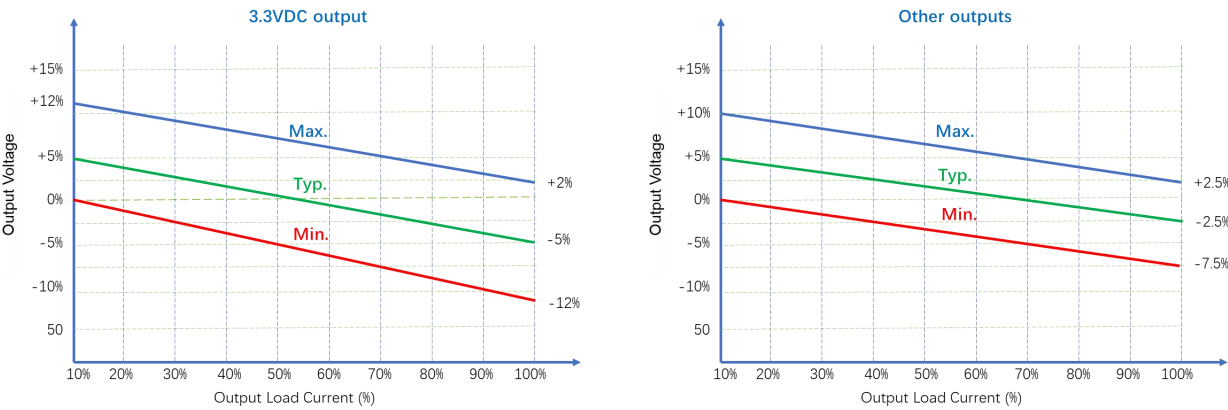


Figure 3: Voltage tolerance envelope

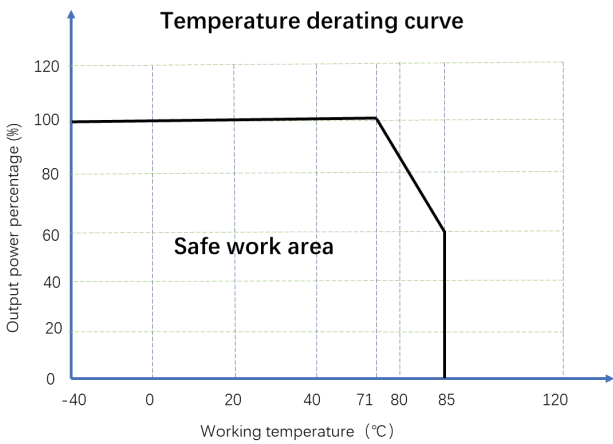


Figure 4: Temperature Derating Curve

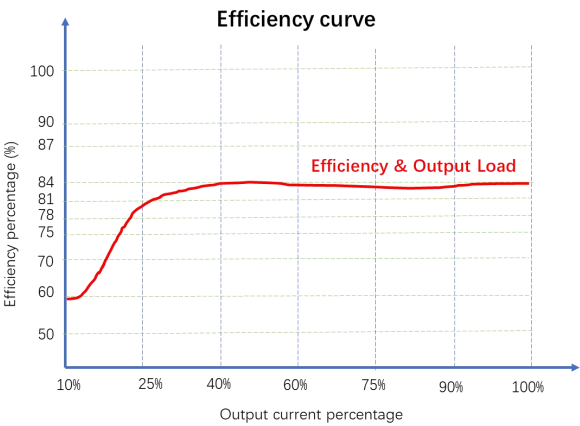


Figure 5: Efficiency VS Output Load (Nominal Voltage Input)


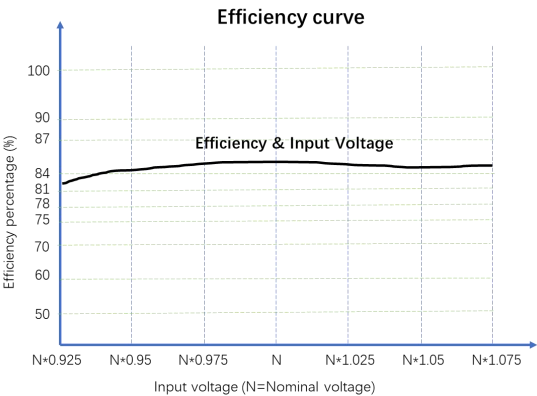


Figure 6: Efficiency VS Input Voltage (100% Load)

Overall Dimensions and Pin Functions

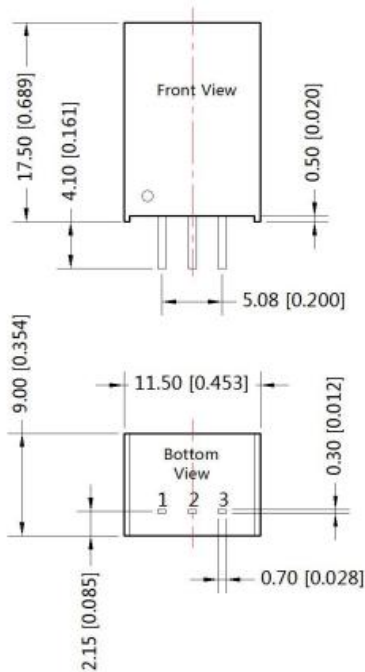

Note:

Dimensions in mm [inch]

Terminal diameter tolerance: ± 0.10 [± 0.004]

Undeclared tolerance: ± 0.50 [± 0.020]

Table 3: Pin Function Table

Pin Definition Table		
Pin	Positive output	Negative output
1	Vin	Vin
2	GND	-Vo
3	+Vo	GND

Figure 7: Overall dimensions

Notes & Instructions

- 1) The input voltage shall not exceed the specified range value, otherwise permanent and unrecoverable damage may be caused;
- 2) Unless otherwise specified, the parameters in this manual are measured at 25 °C, 40%~75% humidity, input nominal voltage and output pure resistance mode under full load;
- 3) All index test methods are based on the company's enterprise standards.
- 4) The copyright and the final interpretation right of the product belong to AMCHARD.

DONGGUAN AMCHARD-POWER TECHNOLOGY CO., LTD.

www.amchard-power.com

Mail: info@amchard-power.com