

FEATURES

1. Continuous short-circuit protection
2. No-load input current as low as 8mA
3. Operating ambient temperature range: -40°C to +105°C
4. High efficiency up to 81%
5. High power density
6. I/O isolation test voltage: 1.5k VDC
7. Industry standard pin-out
8. DIP Package



3 years
Warranty

Selection Guide

Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load*(μF) Max.
	Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.		
AMA0503D-1WR3	5 (4.5-5.5)	±3.3	±152/±15	70/74	1200
AMA0505D-1WR3		±5	±100/±10	76/80	1200
AMA0509D-1WR3		±9	±56/±6	77/81	470
AMA0512D-1WR3		±12	±42/±5	77/81	220
AMA0515D-1WR3		±15	±34/±4	77/81	220
AMA1205D-1WR3	12 (10.8-13.2)	±5	±100/±10	76/80	1200
AMA1212D-1WR3		±12	±42/±5	77/81	280
AMA1224D-1WR3		±24	±21/±2	76/80	110
AMA1524D-1WR3	15 (13.5-16.5)	±24	±21/±2	77/81	110
AMA2409D-1WR3	24 (21.6-26.4)	±9	±56/±6	74/80	500
AMA2412D-1WR3		±12	±42/±4	75/81	280
AMA2415D-1WR3		±15	±33/±3	73/79	280

Note: * The specified maximum capacitive load for positive and negative output is identical.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	5VDC input	3.3VDC output	–	270/8	286/–	mA
		5VDC output	–	251/8	264/–	
		9VDC/12VDC/15VDC output	–	247/8	260/–	
	12VDC input	5VDC output	–	104/8	110/–	
		12VDC output	–	103/8	109/–	
		24VDC output	–	104/8	110/–	
	15VDC input		–	83/8	87/–	
	24VDC input	9VDC output	–	52/8	57/–	
		12VDC output	–	52/8	56/–	
		15VDC output	–	53/8	58/–	
Reflected Ripple Current*			–	15	–	
Surge Voltage (1sec. max.)	5VDC input		-0.7	–	9	VDC
	12VDC input		-0.7	–	18	
	15VDC input		-0.7	–	21	
	24VDC input		-0.7	–	30	
Input Filter			Capacitance filter			

Hot Plug

Unavailable

Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Voltage Accuracy			See output regulation curve (Fig. 1)				
Linear Regulation	Input voltage change: ±1%	3.3VDC output	—	—	1.5	—	
		Other output	—	—	1.2		
Load Regulation	10%-100% load	5VDC input	3.3VDC output	—	15	20	%
			5VDC output	—	10	15	
			9VDC output	—	9	10	
			12VDC output	—	8	10	
			15VDC output	—	7	10	
		Other input	5VDC output	—	—	15	
			9VDC output	—	—	10	
			12VDC output	—	—	10	
			15VDC output	—	—	10	
			24VDC output	—	—	10	
Ripple & Noise*	20MHz bandwidth		—	50	100	mVp-p	
Temperature Coefficient	Full load		—	±0.02	—	%/°C	
Short-circuit Protection			Continuous, self-recovery				
Notes: * The “parallel cable” method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.							

Notes: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.		1500	–	–	VDC
Insulation Resistance	Input-output resistance at 500VDC		1000	–	–	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		–	20	–	pF
Operating Temperature	Derating when operating temperature $\geq 85^{\circ}\text{C}$ (see Fig. 2)		-40	–	105	°C
Storage Temperature			-55	–	125	
Case Temperature Rise	Ta=25°C	3.3VDC output	–	25	–	
		Other output	–	15	–	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds		–	–	300	
Storage Humidity	Non-condensing		5	–	95	%RH
Vibration			10-150Hz, 5G, 0.75mm, along X, Y and Z			
Switching Frequency	100% load, nominal input voltage	5VDC input	–	300	–	kHz
		Other input	–	260	–	
MTBF	MIL-HDBK-217F@25°C		3500	–	–	k hours

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94 -V0)				
Dimensions	20.00 x 10.00 x 7.00 mm				
Weight	2.4g(Typ.)				
Cooling Method	Free air convection				

EMC Specifications

Emissions	CE	CISPR32/EN55032 CLASS B			
	RE	CISPR32/EN55032 CLASS B			
Immunity	ESD	IEC/EN61000-4-2	Air $\pm 8\text{kV}$, Contact $\pm 6\text{kV}$	perf. Criteria B	

Note: Refer to Fig. 4 for recommended circuit test.

Typical Characteristic Curves

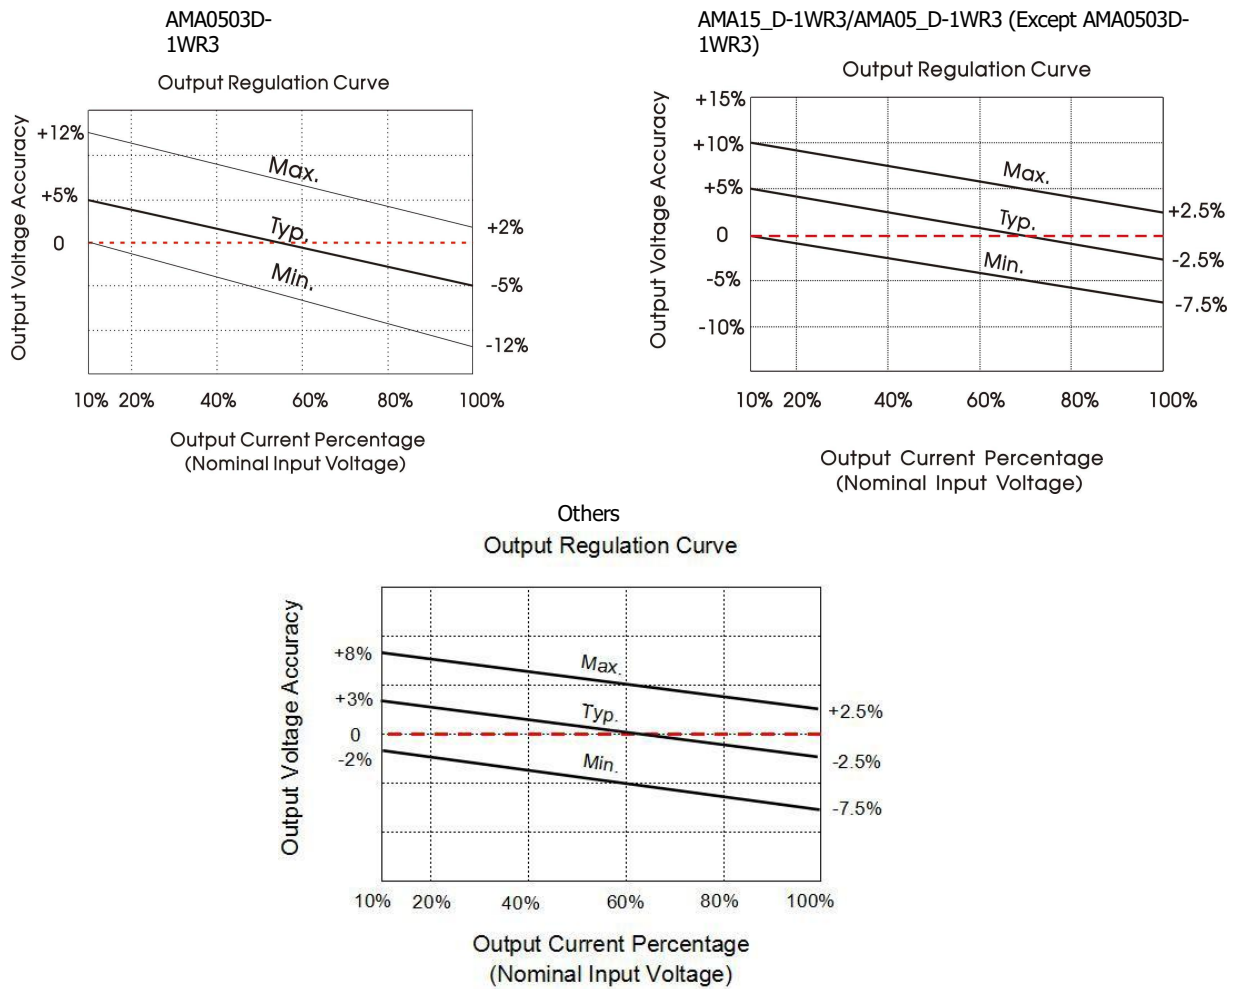


Fig. 1





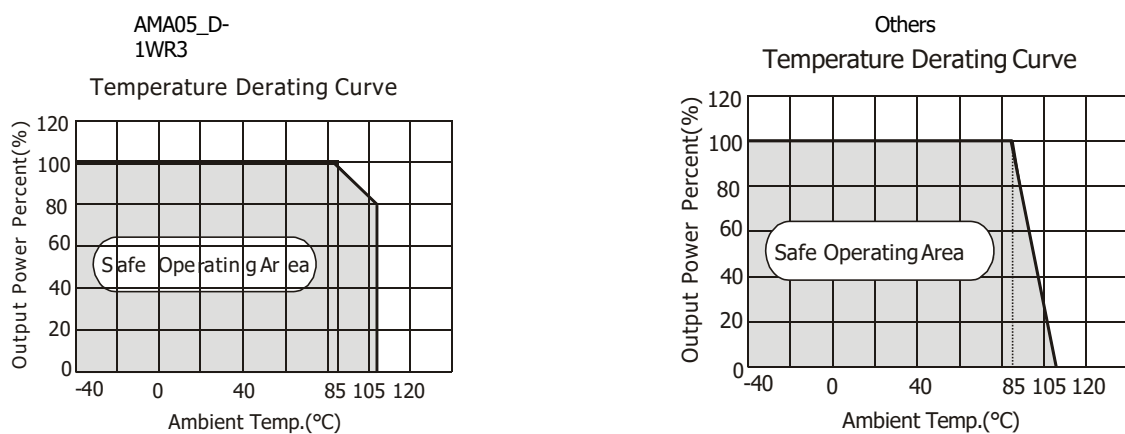


Fig. 2

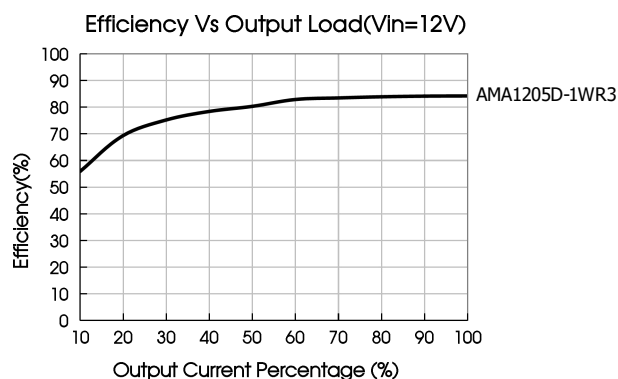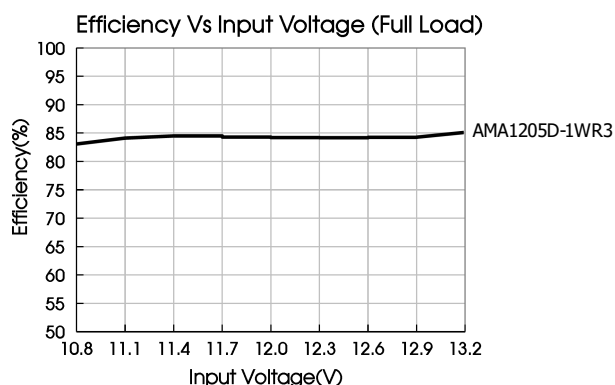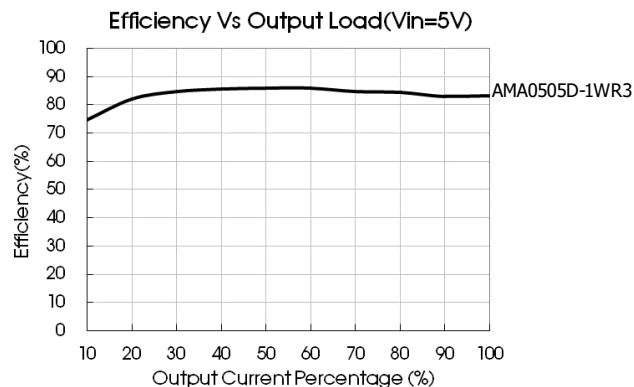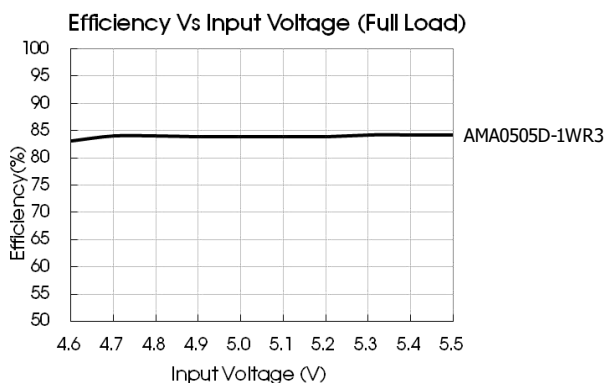

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3. Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

Table 1: Recommended input and output capacitor values

Vin	Cin	Vout	Cout*
5VDC	4.7μF/16V	±3.3VDC/±5VDC	4.7μF/16V
—	—	±9/±12VDC	1μF/25V
—	—	±15VDC	0.47μF/50V
12VDC	2.2μF/25V	±5VDC/±9VDC	4.7μF/16V
15VDC	2.2μF/25V	±12VDC/±15VDC	1μF/25V
24VDC	1μF/50V	±24VDC	0.47μF/50V

Note: *The capacitor value of the positive and the negative output is identical.



Fig. 3

2. EMC compliance circuit

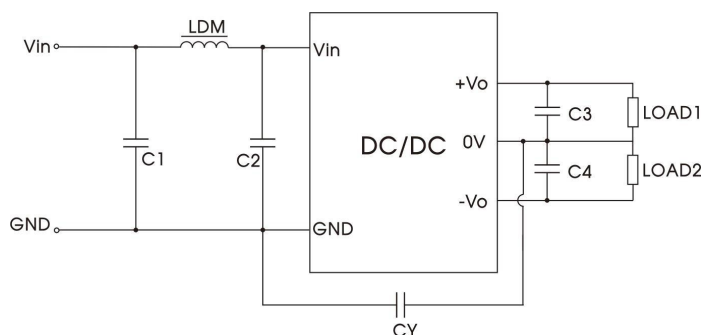



Fig. 4



EMC recommended circuit value table (Table 2)

Input voltage		5VDC		Others
Output voltage		3.3/5/9VDC	12/15VDC	5/9/12/15/24VDC
Emissions	C1/C2	4.7μF /25V	4.7μF /25V	4.7μF /50V
	CY	100pF /2kVDC	1000pF /2kVDC	270pF /2kVDC
	C3/C4	Refer to the Cout in table 1		
	LDM	6.8μH		


Note: In the case of actual use, the requirements for EMI are high, it is subject to CY.

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

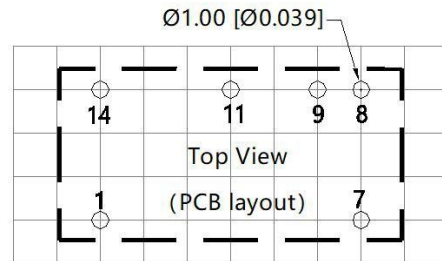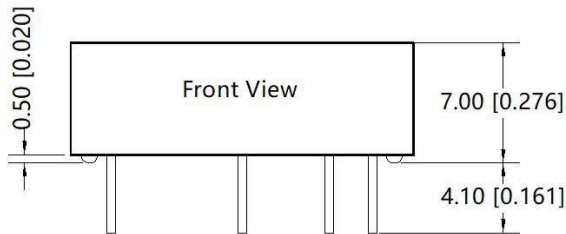

Note: Grid 2.54*2.54mm

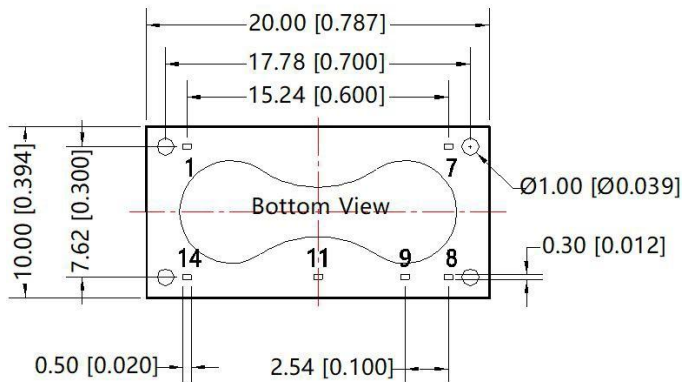

Pin	Mark
1	GND
7	NC
8	0V
9	+Vo
11	-Vo
14	Vin

NC: No connection

Note:

Unit: mm[inch]

Pin section tolerances: $\pm 0.10[\pm 0.004]$

General tolerances: $\pm 0.25[\pm 0.010]$

Note:

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
2. The maximum capacitive load is tested under the input voltage range and full load condition;
3. Unless otherwise stated, all indexes in this manual are measured at $T_a=25^\circ\text{C}$, humidity $<75\%\text{RH}$, nominal input voltage and rated output load;
4. All index testing methods in this manual are based on the enterprise standards of the company;
5. Our company can provide product customization, specific needs can directly contact our technical staff;

DONGGUAN AMCHARD-POWER TECHNOLOGY CO., LTD.

www.amchard-power.com

[Mail:info@amchard-power.com](mailto:info@amchard-power.com)