

## Features

1. Continuous short-circuit protection
2. No-load input current as low as 8mA
3. Operating ambient temperature range: -40°C to +105°C
4. High efficiency up to 86%
5. High power density
6. I/O isolation test voltage 3k VDC
7. Industry standard pin-out



3 years  
Warranty

## Selection Guide

| Part No.      | Input Voltage (VDC) | Output        |                           | Full Load<br>Efficiency (%)<br>Min./Typ. | Capacitive<br>Load*(µF) Max. |
|---------------|---------------------|---------------|---------------------------|------------------------------------------|------------------------------|
|               | Nominal<br>(Range)  | Voltage (VDC) | Current (mA)<br>Max./Min. |                                          |                              |
| AME0503S-2WR3 | 5<br>(4.5-5.5)      | ±3.3          | ±303/±30                  | 71/75                                    | 1200                         |
| AME0505S-2WR3 |                     | ±5            | ±200/±20                  | 80/84                                    | 1200                         |
| AME0509S-2WR3 |                     | ±9            | ±111/±11                  | 81/85                                    | 470                          |
| AME0512S-2WR3 |                     | ±12           | ±83/±8                    | 81/85                                    | 220                          |
| AME0515S-2WR3 |                     | ±15           | ±67/±7                    | 82/86                                    | 220                          |
| AME0524S-2WR3 |                     | ±24           | ±42/±4                    | 82/86                                    | 100                          |
| AME1203S-2WR3 | 12<br>(10.8-13.2)   | ±3.3          | ±303/±30                  | 71/75                                    | 1200                         |
| AME1205S-2WR3 |                     | ±5            | ±200/±20                  | 76/80                                    | 1200                         |
| AME1207S-2WR3 |                     | ±7.2          | ±139/±13                  | 76/80                                    | 470                          |
| AME1209S-2WR3 |                     | ±9            | ±111/±11                  | 78/82                                    | 470                          |
| AME1212S-2WR3 |                     | ±12           | ±83/±8                    | 79/83                                    | 220                          |
| AME1215S-2WR3 |                     | ±15           | ±67/±7                    | 79/83                                    | 220                          |
| AME1224S-2WR3 |                     | ±24           | ±42/±4                    | 79/83                                    | 100                          |
| AME1505S-2WR3 | 15<br>(13.5-16.5)   | ±5            | ±200/±20                  | 76/80                                    | 1200                         |
| AME1515S-2WR3 |                     | ±15           | ±67/±7                    | 78/82                                    | 220                          |
| AME2403S-2WR3 | 24<br>(21.6-26.4)   | ±3.3          | ±303/±30                  | 70/76                                    | 1200                         |
| AME2405S-2WR3 |                     | ±5            | ±200/±20                  | 74/80                                    | 1200                         |
| AME2407S-2WR3 |                     | ±7.2          | ±139/±13                  | 74/80                                    | 470                          |
| AME2409S-2WR3 |                     | ±9            | ±111/±11                  | 75/81                                    | 470                          |
| AME2412S-2WR3 |                     | ±12           | ±83/±8                    | 77/83                                    | 220                          |
| AME2415S-2WR3 |                     | ±15           | ±67/±7                    | 77/83                                    | 220                          |
| AME2424S-2WR3 |                     | ±24           | ±42/±4                    | 77/83                                    | 100                          |

## Input Specifications

| Item                                                                                                                 | Operating Conditions |                          | Min.               | Typ.  | Max.   | Unit |
|----------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------|--------------------|-------|--------|------|
| Input Current<br>(full load / no-load)                                                                               | 5VDC input           | 3.3VDC output            | --                 | 534/8 | 564/-- | mA   |
|                                                                                                                      |                      | 5VDC/7.2VDC output       | --                 | 477/8 | 500/-- |      |
|                                                                                                                      |                      | 9VDC/12VDC output        | --                 | 471/8 | 494/-- |      |
|                                                                                                                      |                      | 15VDC/24VDC output       | --                 | 466/8 | 488/-- |      |
|                                                                                                                      | 12VDC input          | 3.3VDC output            | --                 | 222/8 | 235/-- |      |
|                                                                                                                      |                      | 5VDC/7.2VDC output       | --                 | 208/8 | 219/-- |      |
|                                                                                                                      |                      | 9VDC output              | --                 | 203/8 | 214/-- |      |
|                                                                                                                      |                      | 12VDC/15VDC/24VDC output | --                 | 201/8 | 211/-- |      |
|                                                                                                                      | 15VDC input          | 5VDC/9VDC output         | --                 | 167/8 | 176/-- |      |
|                                                                                                                      |                      | 12VDC/15VDC/24VDC output | --                 | 165/8 | 173/-- |      |
|                                                                                                                      | 24VDC input          | 3.3VDC output            | --                 | 110/8 | 119/-- |      |
|                                                                                                                      |                      | 5VDC/7.2VDC output       | --                 | 104/8 | 112/-- |      |
|                                                                                                                      |                      | 9VDC output              | --                 | 103/8 | 111/-- |      |
|                                                                                                                      |                      | 12VDC output             | --                 | 99/8  | 107/-- |      |
|                                                                                                                      |                      | 15VDC/18VDC/24VDC output | --                 | 97/8  | 104/-- |      |
| Reflected Ripple Current*                                                                                            |                      |                          | --                 | 15    | --     |      |
| Surge Voltage (1sec. max.)                                                                                           | 5VDC input           |                          | -0.7               | --    | 9      | VDC  |
|                                                                                                                      | 12VDC input          |                          | -0.7               | --    | 18     |      |
|                                                                                                                      | 15VDC input          |                          | -0.7               | --    | 21     |      |
|                                                                                                                      | 24VDC input          |                          | -0.7               | --    | 30     |      |
| Input Filter                                                                                                         |                      |                          | Capacitance filter |       |        |      |
| Hot Plug                                                                                                             |                      |                          | Unavailable        |       |        |      |
| Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method. |                      |                          |                    |       |        |      |

## Output Specifications

| Item              | Operating Conditions         |               | Min.                                 | Typ. | Max. | Unit |
|-------------------|------------------------------|---------------|--------------------------------------|------|------|------|
| Voltage Accuracy  |                              |               | See output regulation curve (Fig. 1) |      |      |      |
| Linear Regulation | Input voltage change:<br>±1% | 3.3VDC output | --                                   | --   | ±1.5 | --   |
|                   |                              | Others        | --                                   | --   | ±1.2 |      |
| Load Regulation   | 10%-100%<br>load             | 5VDC input    | 3.3VDC output                        | --   | 10   | %    |
|                   |                              |               | 5/7.2VDC output                      | --   | 8    |      |
|                   |                              |               | 9/12/15 output                       | --   | 7    |      |
|                   |                              |               | 24VDC output                         | --   | 5    |      |
|                   | 12/15/24VDC<br>input         |               | 3.3VDC output                        | --   | 15   |      |
|                   |                              |               | 5VDC output                          | --   | 7    |      |
|                   |                              |               | 6.4VDC output                        | --   | 10   |      |
|                   |                              |               | 7.2VDC output                        | --   | 6    |      |
|                   |                              |               | 9/12VDC output                       | --   | 5    |      |

|                                                                                                                                                    |                 |  |                 |                           |       |     |       |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--|-----------------|---------------------------|-------|-----|-------|--|
|                                                                                                                                                    |                 |  | 15VDC output    | --                        | 4     | 10  |       |  |
|                                                                                                                                                    |                 |  | 18/24VDC output | --                        | 3     | 10  |       |  |
| Ripple & Noise*                                                                                                                                    | 20MHz bandwidth |  | 5V input        | --                        | 75    | 200 | mVp-p |  |
|                                                                                                                                                    |                 |  | 12/15/24V input | --                        | 75    | 180 |       |  |
| Temperature Coefficient                                                                                                                            | Full load       |  |                 | --                        | ±0.02 | --  | %/°C  |  |
| Short-circuit Protection                                                                                                                           |                 |  |                 | Continuous, self-recovery |       |     |       |  |
| Note: * The “parallel cable” method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information. |                 |  |                 |                           |       |     |       |  |

## General Specifications

| Item                                 | Operating Conditions                                                                |                 | Min.                                   | Typ. | Max. | Unit    |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------|----------------------------------------|------|------|---------|
| Isolation                            | Input-output electric strength test for 1 minute with a leakage current of 1mA max. |                 | 3000                                   | --   | --   | VDC     |
| Insulation Resistance                | Input-output resistance at 500VDC                                                   |                 | 1000                                   | --   | --   | MΩ      |
| Isolation Capacitance                | Input-output capacitance at 100kHz/0.1V                                             |                 | --                                     | 20   | --   | pF      |
| Operating Temperature                | Derating when operating temperature ≥ 85°C ( see Fig. 2)                            |                 | -40                                    | --   | 105  | °C      |
| Storage Temperature                  |                                                                                     |                 | -55                                    | --   | 125  | °C      |
| Case Temperature Rise                | Ta=25°C                                                                             |                 | --                                     | 25   | --   |         |
| Pin Soldering Resistance Temperature | Soldering spot is 1.5mm away from case for 10 seconds                               |                 | --                                     | --   | 300  |         |
| Storage Humidity                     | Non-condensing                                                                      |                 | 5                                      | --   | 95   | %RH     |
| Vibration                            |                                                                                     |                 | 10-150Hz, 5G, 0.75mm. along X, Y and Z |      |      |         |
| Switching Frequency                  | Full load, nominal input voltage                                                    | 5V input        | --                                     | 220  | --   | kHz     |
|                                      |                                                                                     | 12/15/24V input | --                                     | 260  | --   |         |
| MTBF                                 | MIL-HDBK-217F @ 25°C                                                                |                 | 3500                                   | --   | --   | k hours |

## Mechanical Specifications

|                |                                                             |  |  |  |  |
|----------------|-------------------------------------------------------------|--|--|--|--|
| Case Material  | Black plastic; flame-retardant and heat-resistant (UL94V-0) |  |  |  |  |
| Dimensions     | 19.65 x 7.05 x 10.16 mm                                     |  |  |  |  |
| Weight         | 2.4g(Typ.)                                                  |  |  |  |  |
| Cooling Method | Free air convection                                         |  |  |  |  |

## EMC Specifications

|                                                    |     |                                                         |
|----------------------------------------------------|-----|---------------------------------------------------------|
| Emissions                                          | CE  | CISPR32/EN55032 CLASS B                                 |
|                                                    | RE  | CISPR32/EN55032 CLASS B                                 |
| Immunity                                           | ESD | IEC/EN61000-4-2 Air ±8kV, Contact ±6kV perf. Criteria B |
| Note: Refer to Fig. 4 for recommended circuit test |     |                                                         |

### Typical Characteristic Curves

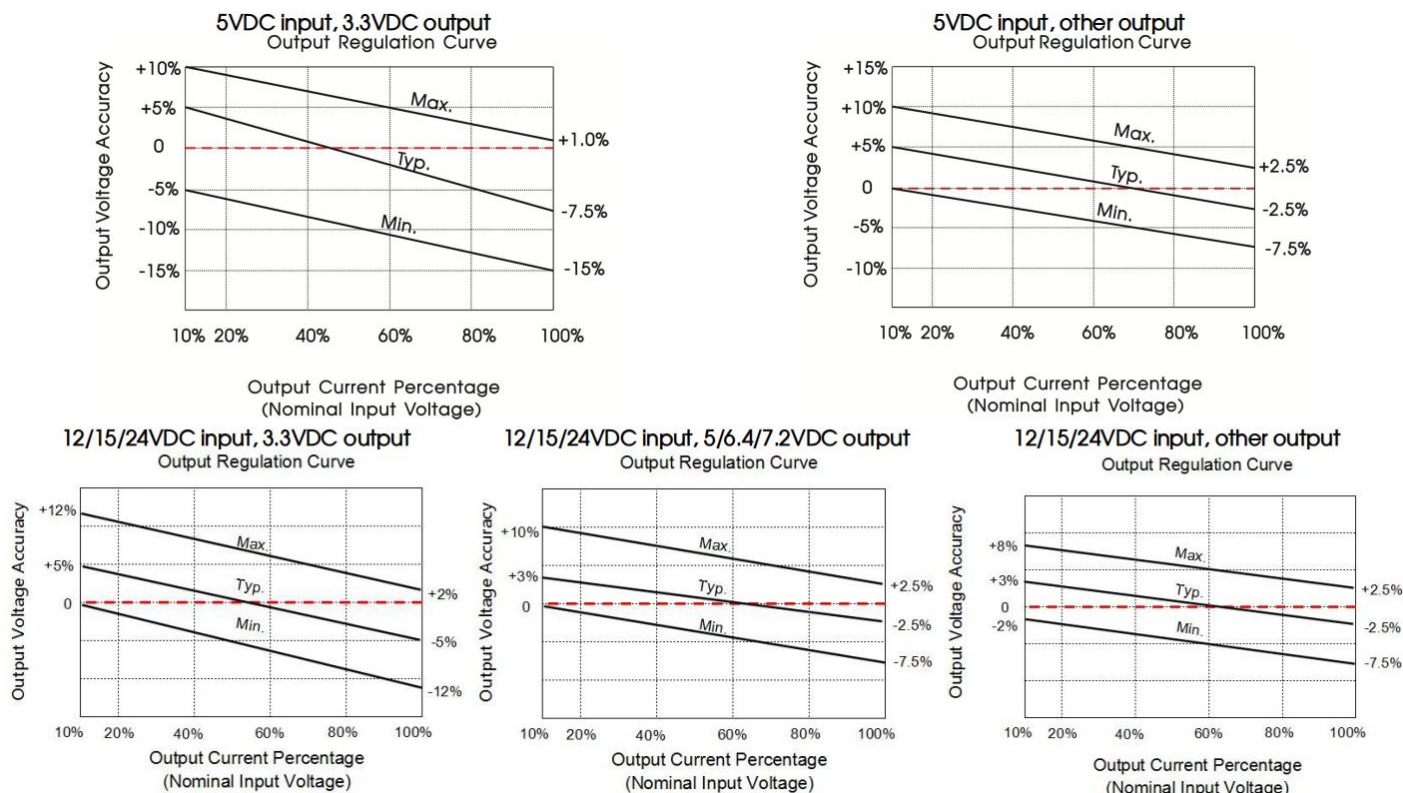


Fig. 1

### Circuit Design and Application

#### 1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3. Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.



Fig.3


Table 1: Recommended input and output capacitor values

Note: \*The capacitor value of the positive and the negative output is identical.

| Vin   | Cin       | Dual Vout | Cout       |
|-------|-----------|-----------|------------|
| 5VDC  | 10μF/16V  | ±3.3VDC   | 4.7μF/16V  |
| 12VDC | 2.2μF/25V | ±5VDC     | 4.7μF/16V  |
| 15VDC | 2.2μF/25V | ±7.2VDC   | 2.2μF/25V  |
| 24VDC | 1μF/50V   | ±9VDC     | 2.2μF/25V  |
|       |           | ±12VDC    | 1μF/25V    |
|       |           | ±15VDC    | 1μF/25V    |
|       |           | ±24VDC    | 0.47μF/50V |

### 2. EMC compliance circuit

Dual Output


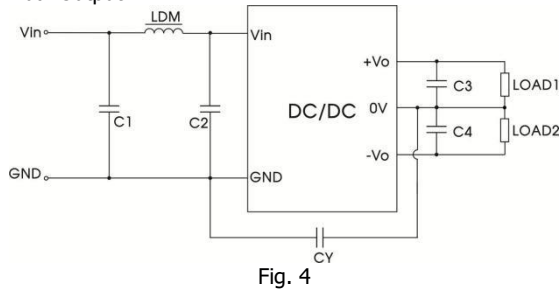


| Input voltage |       | 5VDC                    | 12/15/24VDC |
|---------------|-------|-------------------------|-------------|
| Emissions     | C1/C2 | 4.7μF /16V              | 4.7μF /50V  |
|               | CY    | 270pF/4kV               |             |
|               | C3/C4 | Refer to Cout in Fig. 3 |             |
|               | LDM   | 6.8μH                   |             |

## Dimensions and Recommended Layout

### Dimensions

### PCB Printing Layout & Pin Definition Table

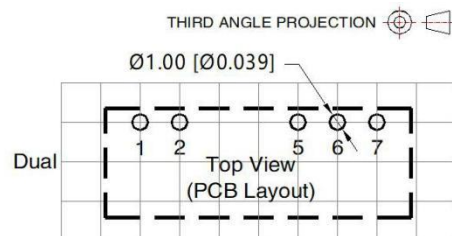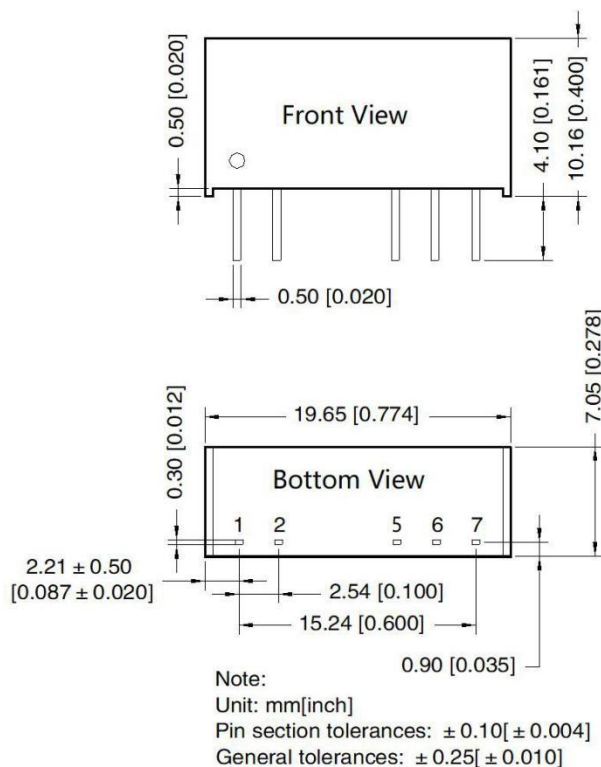

Note: Grid 2.54\*2.54mm

| Pin-Out |      |
|---------|------|
| Pin     | Dual |
| 1       | Vin  |
| 2       | GND  |
| 5       | -Vo  |
| 6       | 0V   |
| 7       | +Vo  |

### Note:

1. The input voltage cannot exceed the specified range value, otherwise permanent and irreparable damage may be caused ;
2. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
3. The maximum capacitive load is tested under the input voltage range and full load condition;
4. Unless otherwise stated, all indexes in this manual are measured at Ta=25°C, humidity <75%RH, nominal input voltage and rated output load;
5. All index testing methods in this manual are based on the enterprise standards of the company;

6. Our company can provide product customization, specific needs can directly contact our technical staff;

**DONGGUAN AMCHARD-POWER TECHNOLOGY CO., LTD.**

[www.amchard-power.com](http://www.amchard-power.com)

Mail:[info@amchard-power.com](mailto:info@amchard-power.com)