

Product Feature

1. Universal AC input/Full range
2. Protections:Short circuit/Overload/Over voltage/Over temperature
3. Cooling by free air convection
4. Can be installed on DIN rail TS-35/7.5 or 15
5. 100% full load burn-in test
6. 3 years warranty

Safety regulations and electromagnetic compatibility

- Safety specification CCC GB4943.1-2022
- Withstand voltage

Input-output :3KVAC, input-ground:2KVAC, output-ground:0.5KVAC

- Insulation impedance

Input-output and input -output -ground:20M Ohms/500VDC/25°C,70%RH

- Electromagnetic compatibility

Meet EN 55032, GB/T9254, FCC Class B CE 62368

Note:The power supply should be considered as part of the components in the system,and the electromagnetic compatibility should be confirmed with the terminal equipment



3 years
Warranty

395g/Typ.

Environment

- Operating temperature/humidity
-20°C-+60°C/20-95%RH,non-condensing(please refer to "Derating curve")
- Storage temperature/humidity
-40°C-+85°C/10-95%RH, non-condensing
- MTBF
>50KH MIL-HDBK-217F(25°C)

Electrical Specifications


Model number	DM-75-12	DM-75-24	DM-75-48
DC output	12V	24V	48V
Rated current	6.3A	3.2A	1.6A
Current range	0-6.3A	0-3.2A	0-1.6A
Rated power	75.6W	76.8W	76.8W
Ripple and Noise (20MHz)	100mVp-p	120mVp-p	150mVp-p
Voltage adjustment range	12-14V	24-28V	48-55V
Linear adjustment rate	±0.5%	±0.5%	±0.5%
Load adjustment rate	±1%	±1%	±1%
Start/rise time(Typ.)	1200ms,60ms/230VAC 2500ms,60ms/115VAC at full load		
Holding time(Typ.)	16ms/230VAC 10ms/115VAC at full load		
Input voltage range	AC 88V-264V		
Frequency range	47-63Hz		
Efficiency(230VAC)	85.5%	88%	89%
Maximum input current	1.8A max.@100V		
Inrush current	60A (Typ.)@230V cold start		
Leakage current	<1mA @240V		

Overload protection	105%-130% of rated output power		
	Protection mode:Constant current mode:automatically recovers after the faulty disappears		
Overvoltage protection	14-17V	29-35V	56-65V
	Protection mode:the output is turned off and normal output can be restored after the converter restart		
Short circuit protection	Output terminal short circuit		
	Protected mode:hiccup mode.The hiccup mode can be automatically recovered after the faulty disappears		
Dimension	32*102*125.2mm		
Weight	0.395kg		


Note:

- 1.Unless otherwise specified,all parameters are measured under the input 230VAC,full load,and 25°Cambient temperature.
- 2.Ripple and noise measurement method:output terminals are paralleled with 0.1uf and 47uf capacitors,and measured at 20MHZ bandwidth.
- 3.Linear adjustment rate measurement method:test from lower voltage to high voltage with full load.
- 4.Load adjustment rate measurement method:from 0A to full load.


Derating Curve

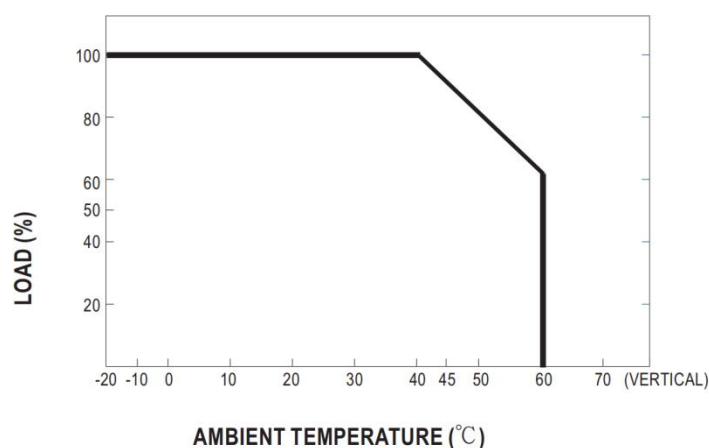

Output Derating VS Input Voltage

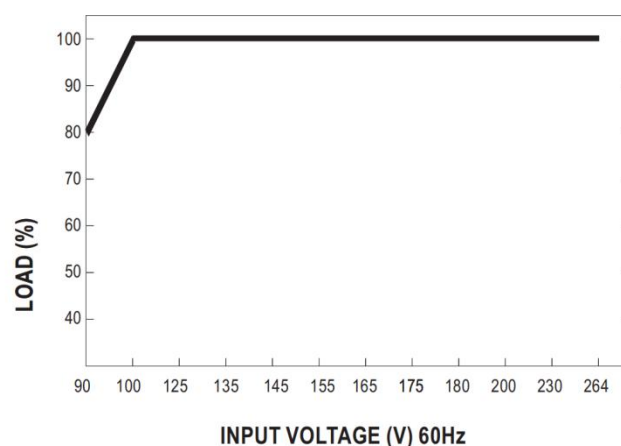

Installation Instruction




Install DIN rail TS35/7.5 or TS35/15


This series fits DIN rail TS35/7.5 or TS35/15.

Mechanical Specification


Unit:mm




Top View

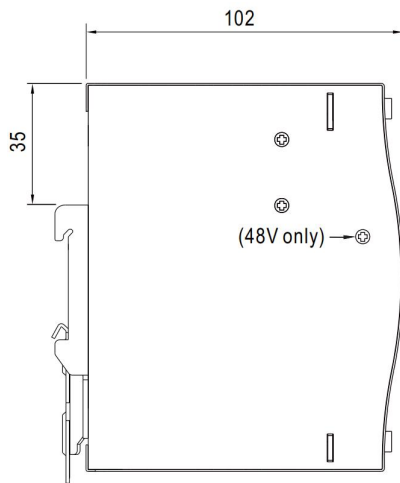


Side View

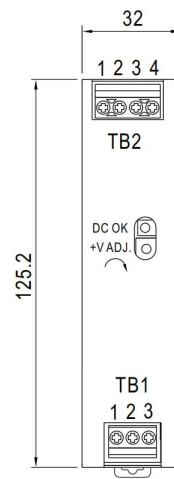

Front View

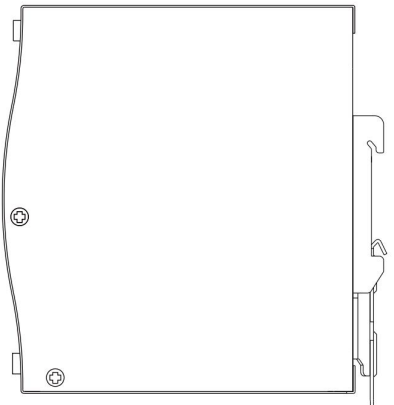

Side View



Bottom View

Terminal Pin No. Assignment(TB1)

Pin	Function
1	FG
2	AC/N or DC-
3	AC/L or DC+

Terminal Pin No. Assignment(TB2)

Pin	Function
1,2	DC OUTPUT -V
3,4	DC OUTPUT +V

DONGGUAN AMCHARD-POWER TECHNOLOGY CO., LTD.

www.amchard-power.com

Mail:info@amchard-power.com