

Product Feature

1. Universal Input: 85-264VAC (100-370VDC)
2. Operating temperature range: -40°C - +85°C
3. Small size, high efficiency
4. The mechanism has input undervoltage protection
5. Low power consumption, environmental protection
6. Industrial product technical design



Selection Guide



3 years
Warranty

Part No.	Input Voltage (VAC)	Out Power (W)	Out Voltage (VDC)	Out Current (mA)MAX	Full Load Efficiency % (230VAC, Typ.)	Capacitive Load(μF) Max.
QM05-20B05R2	85-264	5	5	1000	76	3000
QM05-20B09R2		5	9	550	78	1000
QM05-20B12R2		5	12	420	80	820
QM05-20B15R2		5	15	330	81	680
QM05-20B24R2		5	24	210	81	220

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage	AC Input	85	--	264	VAC
	DC Input	100	--	370	VDC
Input Current	110VAC	--	0.11	--	A
	230VAC	--	0.07	--	
Input Frequency		47	--	63	Hz
Fuse		1A, slow-blow, required			
Leakage Current		0.3mA RMS typ. 230VAC/50Hz			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	10% - 100%load	--	±2	--	%
Linear Regulation	Rated load	--	±0.5	--	
Load Regulation	10% - 100%load	--	±1.0	--	
Ripple & Noise	20MHz bandwidth, 10% - 100%load	--	60	120	mV
Temperature Coefficient		--	±0.02	--	%/°C
Stand-by Power Consumption	230VAC	--	0.1	--	W
Min. Load		0	--	--	%
Over Current Protection		110	--	--	%Io
Short-Circuit Protection		Continuous, Self-Recovery			
Hold-up Time	230VAC	--	50	--	ms

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, test time 1 minute, leakage current less than 5mA		4000	--	--	VAC
Insulation Resistance	Input-output, insulated voltage 500VDC		100	--	--	MΩ
Power Derating	-40°C - -25°C		2.8	--	--	%°C
	+55°C - +85°C	5V/9V/24V	2.2	--	--	
	+55°C - +85°C	12V/15V	3.0	--	--	
	85VAC - 100VAC		1.0	--	--	%/VAC
Operating Temperature			-40	--	+85	°C
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Soldering Profile	Wave-soldering		260 ± 5°C; time: 5 - 10s			
	Manual-welding		360 ± 5°C; time: 3 - 5s			
Safety Standard			IEC/UL62368-1			
Safety Class			CLASS II			
MTBF	MIL-HDBK-217F@25°C		>2600,000h			

Mechanical Specification



Package Dimensions	25.40 x 25.40 x 17.6mm
Weight	23g (Typ.)
Cooling Method	Free air convection

EMC Specifications


EMI	CE	CISPR32/EN55032 CLASS B	
	RE	CISPR32/EN55032 CLASS B	
EMS	RS	IEC/EN61000-4-3 10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4 ±4KV	perf. Criteria B
	Surge	IEC/EN61000-4-5 line to line ±1KV	perf. Criteria B
		IEC/EN61000-4-5 line to line ±2KV (application circuit 2)	perf. Criteria B
	CS	IEC/EN61000-4-6 10Vr.m.s	perf. Criteria A
	ESD	IEC/EN61000-4-2 Contact ±6KV/±8KV	perf. Criteria B

Typical Characteristic Curves


Input voltage Derating Curve
Temperature Derating Curve

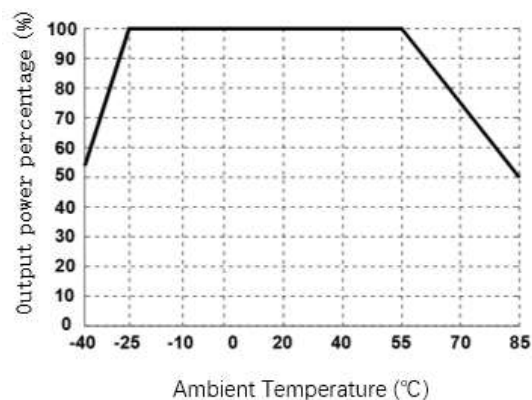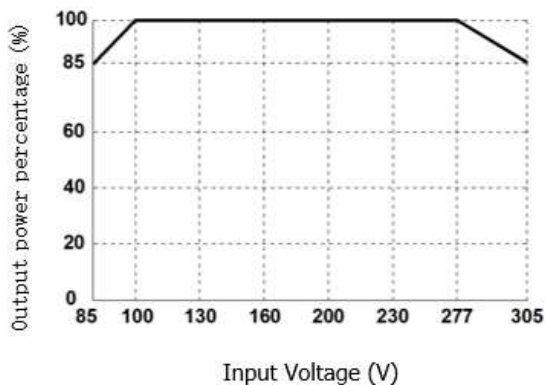

Efficiency VS input voltage (Full load)

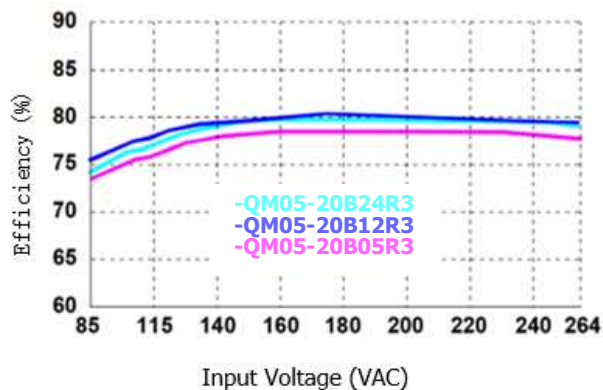


Efficiency VS out load (Vin=230VAC)

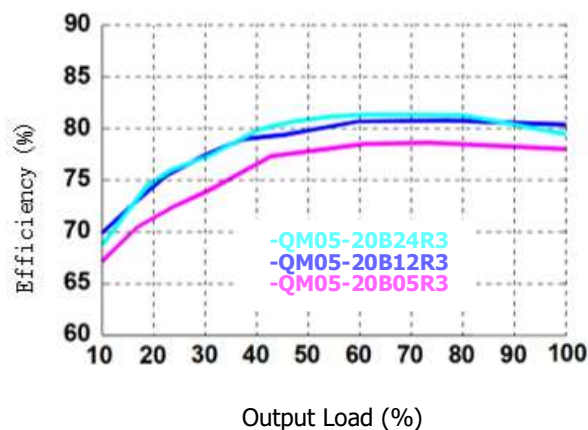

Typical Circuit Design And Application

Application circuit (Figure 1)

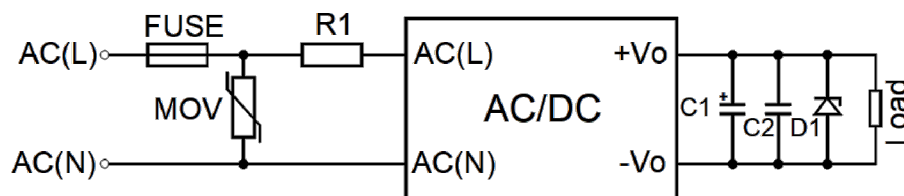


Reference Table for Selection of Peripheral Devices

Out Voltage	FUSE	MOV	R1	C1	C2	D1
5VDC	1A/300VAC slow-blow,	10D561K	12Ω/3W (wire-wound)	150uF/25V	0.1uF/25V	See Note2
9/12VDC				150uF/25V	0.1uF/25V	

15/24VDC	required		resistor, required)	100uF/35V	0.1uF/50V	
Note: 1. FUSE, Mov and NTC Can be selected based on actual needs. 1. D1 is a TVS transistor that can protect the downstream circuit in case of module abnormalities. It is recommended to choose a model that is 1.2 times the output voltage.						

EMS Solutions - Recommended Circuits

EMS Solutions - Recommended Circuits (Figure 2)

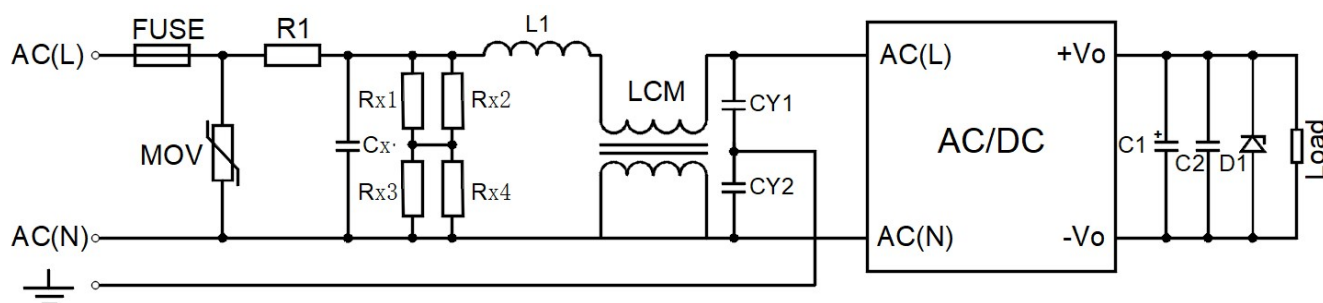



Recommended parameter values for EMC solution circuits

Model	Recommended value
FUSE	2A/300VAC, slow-blow, required
MOV	14D561K
Cx	0.1uF/275VAC
L1	1.2mH/0.3A
CY1, CY2	1nF/400VAC
LCM	20mHCommon mode Choke
Rx1,Rx2,Rx3,Rx4	2MΩ/1206

Dimensions and Recommended Layout

Dimensions

PCB Printing Layout

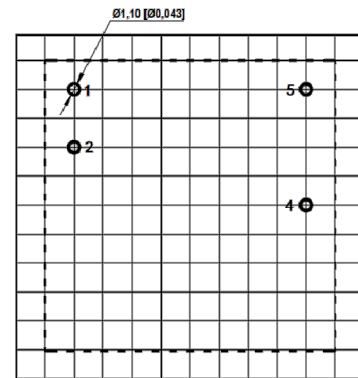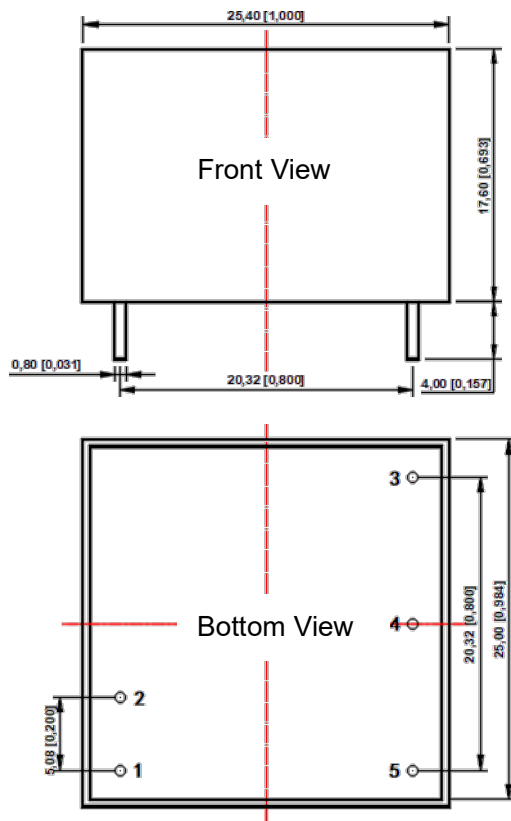

Grid size: 2.54*2.54mm

Pin Function Table

Pin	Function
1	AC(N)
2	AC(L)
3	No Pin
4	-Vo
5	+Vo

Note:

Unit: mm[inch]

Pin section tolerances: $\pm 0.10 [\pm 0.004]$

General tolerances: $\pm 0.50 [\pm 0.020]$

Note:

1. The input voltage cannot exceed the specified range value, otherwise permanent and irreparable damage may be caused;
2. Unless otherwise specified, the parameters in this datasheet were measured at 25°C, humidity 40%~75%, input nominal voltage and output pure resistance mode under full load;
3. All index test methods are based on our company's enterprise standards.

DONGGUAN AMCHARD-POWER TECHNOLOGY CO., LTD.

www.amchard-power.com

Mail: info@amchard-power.com