

Features


1. Sustainable short-circuit protection
2. Wide operating temperature range: -40°C to +105°C
3. Up to 85% efficiency
4. Ripple as low as 40mVp-p
5. Small SMD packaging, internationally standard pin method and layout, with strong substitutability
6. Isolation:3000VDC
7. DC constant voltage input, Output 2W, Isolated, Non stabilized voltage, Single Output



3 years
Warranty

Model Numbering

AMFxxxxXT-2WR3

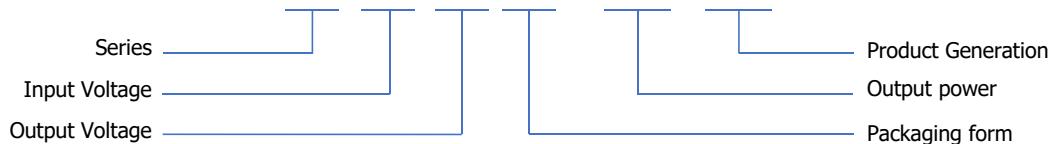

Selection Guide

Product model	Input Voltage Standard value(range)	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum capacitive load (μ F)
AMF0303XT-2WR3	3.3VDC (2.97-3.63)	3.3	400/40	74/79	2400
AMF0305XT-2WR3		5	400/40	79/85	2400
AMF0309XT-2WR3		9	222/22	79/85	1000
AMF0312XT-2WR3		12	167/17	79/85	560
AMF0315XT-2WR3		15	133/13	81/86	560
AMF0324XT-2WR3		24	83/8	81/86	220

Product model	Input Voltage Standard value(range)	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum capacitive load (μ F)
AMF0503XT-2WR3	5VDC (4.5-5.5)	3.3	400/40	74/79	2400
AMF0505XT-2WR3		5	400/40	79/85	2400
AMF0509XT-2WR3		9	222/22	79/85	1000
AMF0512XT-2WR3		12	167/17	79/85	560
AMF0515XT-2WR3		15	133/13	81/86	560
AMF0524XT-2WR3		24	83/8	81/86	220
AMF0903XT-2WR3	9VDC (8.1-9.9)	3.3	400/40	74/79	2400
AMF0905XT-2WR3		5	400/40	79/85	2400
AMF0909XT-2WR3		9	222/22	79/85	1000
AMF0912XT-2WR3		12	167/17	79/85	560
AMF0915XT-2WR3		15	133/13	81/86	560
AMF0924XT-2WR3		24	83/8	81/86	220
AMF1203XT-2WR3	12VDC (10.8-13.2)	3.3	400/40	74/79	2400
AMF1205XT-2WR3		5	400/40	79/85	2400
AMF1209XT-2WR3		9	222/22	79/85	1000
AMF1212XT-2WR3		12	167/17	79/85	560
AMF1215XT-2WR3		15	133/13	81/86	560
AMF1224XT-2WR3		24	83/8	81/86	220
AMF1503XT-2WR3	15VDC (13.5-16.5)	3.3	400/40	74/79	2400
AMF1505XT-2WR3		5	400/40	79/85	2400
AMF1509XT-2WR3		9	222/22	79/85	1000
AMF1512XT-2WR3		12	167/17	79/85	560
AMF1515XT-2WR3		15	133/13	81/86	560
AMF1524XT-2WR3		24	83/8	81/86	220
AMF2403XT-2WR3	24VDC (21.6-26.4)	3.3	400/40	74/79	2400
AMF2405XT-2WR3		5	400/40	79/85	2400
AMF2409XT-2WR3		9	222/22	79/85	1000
AMF2412XT-2WR3		12	167/17	79/85	560
AMF2415XT-2WR3		15	133/13	81/86	560
AMF2424XT-2WR3		24	83/8	81/86	220

Input Characteristics

Parameter	Conditions		Min.	Typ.	Max.	Units
Input current (Rated Load)	Nominal voltage input@3.3VDC	3.3VDC Output	--	339	357	mA
		5VDC/7.2VDC Output	--	477	500	mA
		9VDC/12VDC Output	--	471	494	mA
		15VDC/24VDC Output	--	466	488	mA
	Nominal voltage input@5VDC	3.3VDC Output	--	339	357	mA
		5VDC/7.2VDC Output	--	477	500	mA
		9VDC/12VDC Output	--	471	494	mA
		15VDC/24VDC Output	--	466	488	mA
	Nominal voltage input@12VDC	3.3VDC Output	--	196	213	mA
		5VDC/7.2VDC Output	--	202	207	mA
		9VDC/12VDC Output	--	198	203	mA
		15VDC/24VDC Output	--	193	200	mA
	Nominal voltage input@15VDC	3.3VDC Output	--	161	175	mA
		5VDC/7.2VDC Output	--	181	192	mA
		9VDC/12VDC Output	--	175	183	mA
		15VDC/24VDC Output	--	170	178	mA
	Nominal voltage input@24VDC	3.3VDC Output	--	98	106	mA
		5VDC/7.2VDC Output	--	104	113	mA
		9VDC/12VDC Output	--	98	106	mA
		15VDC/24VDC Output	--	91	98	mA
Input current (No-load)			--	5	30	mA
Reflected ripple current			--	15	--	mA
Input impulse voltage	1sec. max.	3.3VDC/5VDC Input	-0.7	--	5	VDC
		9VDC Input	-0.7	--	9	VDC
		12VDC Input	-0.7	--	18	VDC
		15VDC Input	-0.7	--	21	VDC
		24VDC Input	-0.7	--	30	VDC
Input filter	Capacitive filtering					

Output Characteristic

Parameter	Conditions	Min.	Typ.	Max.	Units	
Output voltage accuracy			See Figure 3 (envelope curve)			
Linear regulation rate	Input voltage variation+/- 1%	3.3VDC Output	--	--	+/-1.5 %	
		Other outputs	--	--	+/-1.2 %	
Load regulation rate	10% to 100% load	3.3VDC Output	--	15	20 %	
		5VDC Output	--	10	15 %	
		9VDC Output	--	8	10 %	
		12VDC Output	--	7	10 %	
		15VDC Output	--	6	10 %	
		24VDC Output	--	5	10 %	
Ripple & Noise	20MHz bandwidth	--	30	100	mVp-p	
Temperature drift coefficient	100% load	--	+/-0.02	--	%/°C	
Short circuit protection	Sustainable, Self-healing					
Note: The testing method for ripple and noise is the parallel line testing method.						

General Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Input-output, Test time 1 minute, Leakage current less than 1 mA	3000	--	--	VDC
Insulation resistance	Input-output, Insulation voltage 500VDC	1000	--	--	MΩ
Isolation capacitance	Input-output, 100KHz/0.1V	--	20	--	pF
Working temperature	Temperature ≥ 85 °C for derating (See Figure 4)	-40	--	+105	°C
Storage temperature		-55	--	+125	°C
Storage humidity	Non condensing	--	--	95	%RH

Parameter	Conditions	Min.	Typ.	Max.	Units
Housing temperature rise during operation	Ta=25 °C, Nominal input, Full output	--	15	25	°C
Soldering temperature resistance of pins	The distance from the welding spot to the shell is 1.5mm, 10 seconds	--	--	300	°C
	REFLOW:Peak temperature Tc ≤ 245 °C, maximum time above 217 °C for 60 seconds.	--	--	245	°C
Switching frequency	Full load, Nominal input voltage	--	270	--	kHz
Mean time between failures 【MTBF】	MIL-HDBK-217F@25°C	3500	--	--	kHours

Physical Characteristics

Parameter	Content
Housing material	Black flame retardant and heat-resistant plastic (UL94V-0)
Overall dimensions	13.70 x 11 x 7 mm (Length * Width * Height)
Weight	1.4g(Typ.)
Cooling mode	Natural air cooling

EMC Characteristics

Parameter	Category	Content
EMI	Conductive disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
	Radiation disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
EMS	Electrostatic discharge	IEC/EN61000-4-2 Contact ±4KV perf. Criteria B

Circuit Design and Application



Figure 1: Application circuit

Table 1:
Recommended Capacitive Load Values

Vin(VDC)	Cin(µF)	Component	Value
3.3VDC	4.7µF/16V	±3.3/±5VDC	10µF/16V
5VDC	4.7µF/16V	±9VDC	2.2µF/16V
12VDC	2.2µF/25V	±12VDC	2.2µF/25V
15VDC	2.2µF/25V	±12VDC	1µF/25V
24VDC	1µF/50V	±24VDC	1µF/50V

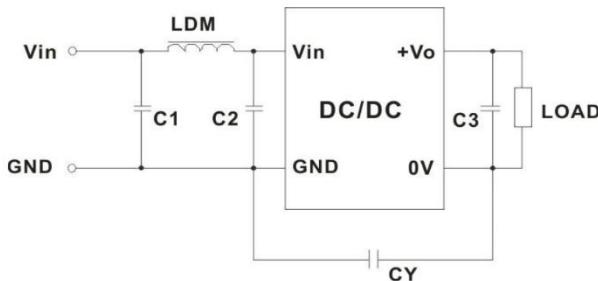


Figure 2: EMC Typical Recommended Circuits

Table 2:
Recommended Circuit Parameter Values

Category	Component	Value
EMI	C1	4.7µF /50V
	C2	4.7µF /50V
	C3	Refer to Cout parameter in Table 2
	CY	270pF/2kV
	LDM	6.8µH

Product Characteristic Curve

1. Typical application: If further reduction of input and output ripple is required, a capacitor filter network can be connected at the input and output ends. The application circuit is shown in Figure 1. However, suitable filter capacitors should be selected. If the capacitance is too large, it may cause overcurrent or poor startup of the power supply. For each output, while ensuring safe and reliable operation, the recommended capacitance load values are shown in Table 1.
2. EMC requirements: For situations with high EMC requirements, a typical EMC recommended circuit is shown in Figure 2.
3. Input requirements: Ensure that the fluctuation range of the input voltage does not exceed the upper and lower limits of the input voltage specified in this data sheet, and the input power must be greater than the output power specified in this data sheet. For situations with a 24V input voltage, it is recommended to connect a TVS tube between the positive and negative input pins for protection (recommended parameters for TVS tubes: 30V, bidirectional, SOD-123 packaging).
4. Output load requirements: Try to avoid using it without load as much as possible; When the actual power of the load is less than 10% of the rated output power in this data sheet, or when it needs to be used in no-load situations, it is recommended to connect a load resistor externally at the output end. The load resistor can be calculated according to 5-10% of the rated power in this data sheet. The calculation formula for the load resistor value is $RL=U_{out}^2/(P_{out} \times 10\%)$.
5. Overload protection: Under normal working conditions, the output circuit of this product has no protection function for overload situations. The simplest method is to connect a self recovery fuse in series at the input end, or add a circuit breaker outside the circuit; Or during design and selection, the actual power of the circuit should be around 60-80% of the rated power in this data sheet.

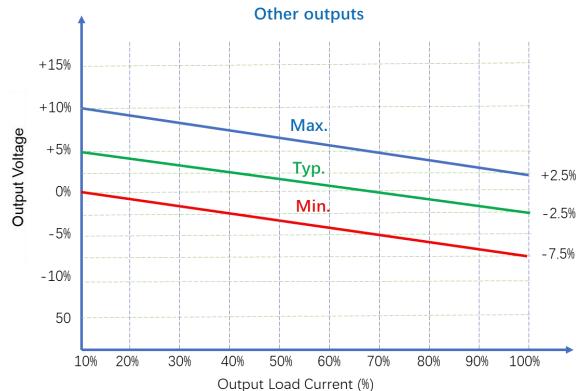
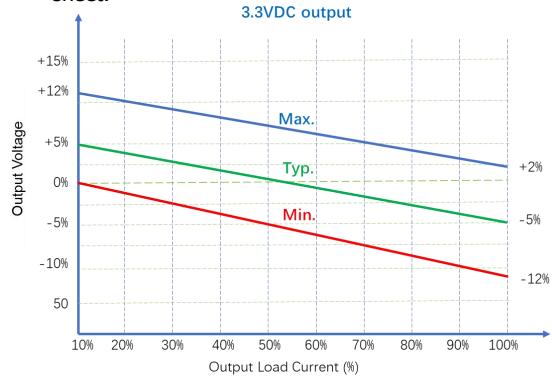


Figure 3: Voltage tolerance envelope

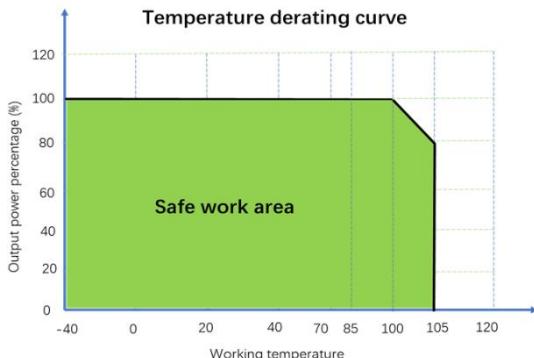


Figure 4: Temperature Derating Curve

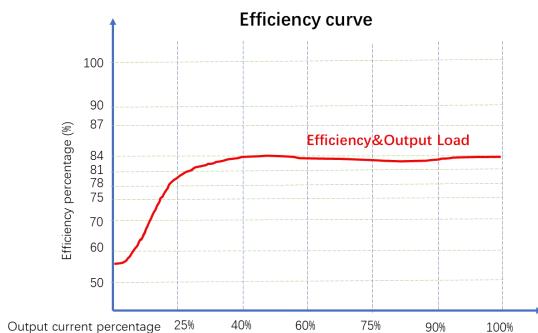


Figure 5: Efficiency VS Output Load (Nominal Voltage Input)

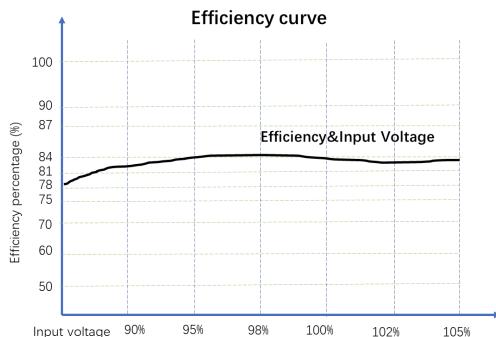


Figure 6: Efficiency VS Input Voltage (100% Load)

Overall Dimensions and Pin Functions

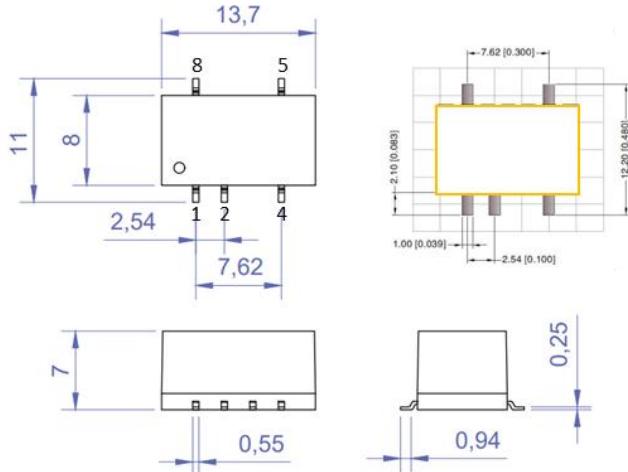


Figure 7: Overall dimensions

Table 3: Pin Function Table

Pin	Function
1	GND
2	Vin
4	0V
5	+Vo
8	NC


Note:

Dimensions in mm


Terminal diameter tolerance: +/-0.10

Undeclared tolerance: +/-0.50


Packaging Method



37 Pieces/Tube

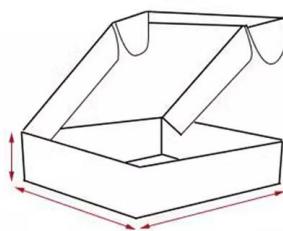

1850 Pieces/Inner box

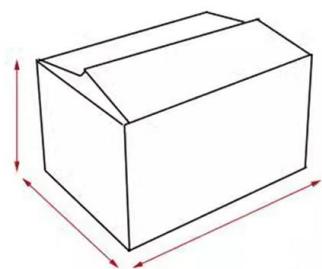

9250 Pieces/Outer box

Notes & Instructions

1. The input voltage shall not exceed the specified range value, otherwise permanent and unrecoverable damage may be caused;
2. Unless otherwise specified, the parameters in this manual are measured at 25 °C, 40%~75% humidity, input nominal voltage and output pure resistance mode under full load;
3. All index test methods are based on the company's enterprise standards.
4. The copyright and the final interpretation right of the product belong to AMCHARD.