


Features


1. Wide operating temperature range: -40°C to +85°C
2. Up to 83% efficiency
3. No load current as low as 5mA
4. Ripple as low as 40mVp-p
5. Isolation voltage 4200VAC or 6000VDC
6. Fixed voltage input, Output 2W, Isolated, Non stabilized voltage, Single Output, SIP package.



3 years
Warranty

Model Numbering

AMHxxxxS-2WR3

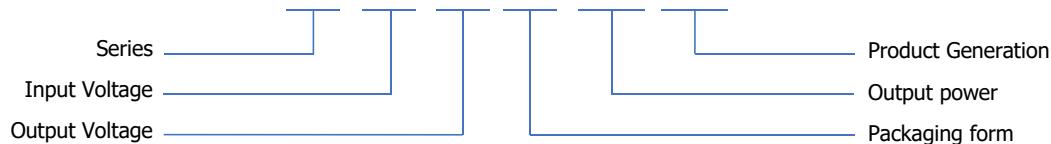

Selection Guide

Product model	Input Voltage Standard value(range)	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum capacitive load (μF)
AMH0303S-2WR3	3.3VDC (2.97-3.63)	3.3VDC	400/40	76/80	1000
AMH0305S-2WR3		5VDC	400/40	78/82	1000
AMH0309S-2WR3		9VDC	222/22	78/82	560
AMH0312S-2WR3		12VDC	167/17	78/82	560
AMH0315S-2WR3		15VDC	133/13	78/82	560
AMH0324S-2WR3		24VDC	83/8	78/82	560

DC-DC Converters

Product model	Input Voltage Standard value(range)	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum capacitive load (μ F)
AMH0503S-2WR3	5VDC (4.5-5.5)	3.3VDC	400/40	76/80	1000
AMH0505S-2WR3		5VDC	400/40	78/82	1000
AMH0509S-2WR3		9VDC	222/22	78/82	560
AMH0512S-2WR3		12VDC	167/17	78/82	560
AMH0515S-2WR3		15VDC	133/13	78/82	560
AMH0524S-2WR3		24VDC	83/8	78/82	560
AMH0903S-2WR3	9VDC (8.1-9.9)	3.3VDC	400/40	76/80	1000
AMH0905S-2WR3		5VDC	400/40	78/82	1000
AMH0909S-2WR3		9VDC	222/22	78/82	560
AMH0912S-2WR3		12VDC	167/17	78/82	560
AMH0915S-2WR3		15VDC	133/13	78/82	560
AMH0924S-2WR3		24VDC	83/8	78/82	560
AMH1203S-2WR3	12VDC (10.8-13.2)	3.3VDC	400/40	76/80	1000
AMH1205S-2WR3		5VDC	400/40	78/82	1000
AMH1209S-2WR3		9VDC	222/22	78/82	560
AMH1212S-2WR3		12VDC	167/17	78/82	560
AMH1215S-2WR3		15VDC	133/13	78/82	560
AMH1224S-2WR3		24VDC	83/8	78/82	560
AMH1503S-2WR3	15VDC (13.5-16.5)	3.3VDC	400/40	76/80	1000
AMH1505S-2WR3		5VDC	400/40	78/82	1000
AMH1509S-2WR3		9VDC	222/22	78/82	560
AMH1512S-2WR3		12VDC	167/17	78/82	560
AMH1515S-2WR3		15VDC	133/13	78/82	560
AMH1524S-2WR3		24VDC	83/8	78/82	560
AMH2403S-2WR3	24VDC (21.6-26.4)	3.3VDC	400/40	76/80	1000
AMH2405S-2WR3		5VDC	400/40	78/82	1000
AMH2409S-2WR3		9VDC	222/22	78/82	560
AMH2412S-2WR3		12VDC	167/17	78/82	560
AMH2415S-2WR3		15VDC	133/13	78/82	560
AMH2424S-2WR3		24VDC	83/8	78/82	560

Input Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Units
Input current (Rated Load)	Nominal voltage input@3.3VDC	3.3VDC Output	--	768	mA
		5VDC/7.2VDC Output	--	740	mA
		9VDC/12VDC Output	--	730	mA
		15VDC/24VDC Output	--	700	mA
	Nominal voltage input@5VDC	3.3VDC Output	--	542	mA
		5VDC/7.2VDC Output	--	488	mA
		9VDC/12VDC Output	--	482	mA
		15VDC/24VDC Output	--	482	mA
	Nominal voltage input@12VDC	3.3VDC Output	--	224	mA
		5VDC/7.2VDC Output	--	210	mA
		9VDC/12VDC Output	--	208	mA
		15VDC/24VDC Output	--	206	mA
	Nominal voltage input@15VDC	3.3VDC Output	--	168	mA
		5VDC/7.2VDC Output	--	168	mA
		9VDC/12VDC Output	--	166	mA
		15VDC/24VDC Output	--	166	mA
	Nominal voltage input@24VDC	3.3VDC Output	--	112	mA
		5VDC/7.2VDC Output	--	106	mA
		9VDC/12VDC Output	--	106	mA
		15VDC/24VDC Output	--	104	mA
Input current (No-load)		--	8	20	mA
Reflected ripple current		3	15	20	mA
Input impulse voltage	1sec. max.	3.3VDC/5VDC Input	-0.7	--	VDC
		9VDC Input	-0.7	--	VDC
		12VDC Input	-0.7	--	VDC
		15VDC Input	-0.7	--	VDC
		24VDC Input	-0.7	--	VDC
Input filter	Capacitive filtering				
Remarks: This product does not support hot plug					

Output Characteristic

Parameter	Conditions	Min.	Typ.	Max.	Units	
Output voltage accuracy			See Figure 3 (envelope curve)			
Linear regulation rate	Input voltage variation +/- 1%	3.3VDC Output	--	--	+/-1.5 %	
		Other outputs	--	--	+/-1.2 %	
Load regulation rate	10% to 100% load	3.3VDC Output	--	8	20 %	
		5VDC Output	--	5	15 %	
		9VDC Output	--	3	10 %	
		12VDC Output	--	3	10 %	
		15VDC Output	--	3	10 %	
		24VDC Output	--	2	10 %	
Ripple & Noise	20MHz bandwidth	--	40	100	mVp-p	
Temperature drift coefficient	100% load	--	+/-0.03	--	%/°C	
Short circuit protection	Sustainable, Self-healing					
Note: The testing method for ripple and noise is the parallel line testing method.						

General Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Input-output, Test time 1 minute, Leakage current less than 1 mA	4500	--	--	VAC
		6000	--	--	VDC
Insulation resistance	Input-output, Insulation voltage 500VDC	1000	--	--	MΩ
Isolation capacitance	Input-output, 100KHz/0.1V	--	5	10	pF
Working temperature	Temperature ≥ 85 °C for derating (See Figure 4)	-40	--	+85	°C
Storage temperature		-55	--	+125	°C
Storage humidity	Non condensing	--	--	95	%RH

Parameter	Conditions	Min.	Typ.	Max.	Units
Housing temperature rise during operation	Ta=25 °C, Nominal input, Full output	--	15	25	°C
Soldering temperature resistance of pins	The distance from the welding spot to the shell is 1.5mm, 10 seconds	--	--	300	°C
	REFLOW: Peak temperature Tc ≤ 245 °C, maximum time above 217 °C for 60 seconds.	--	--	245	°C
Switching frequency	Full load, Nominal input voltage	--	270	--	kHz
Mean time between failures 【MTBF】	MIL-HDBK-217F@25°C	3500	--	--	kHours

Physical Characteristics

Parameter	Content
Housing material	Black flame retardant and heat-resistant plastic (UL94V-0)
Overall dimensions	19.50*9.80*12.50 mm
Weight	4.2g(Typ.)
Cooling mode	Natural air cooling

EMC Characteristics

Parameter	Category	Content
EMI	Conductive disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
	Radiation disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
EMS	Electrostatic discharge	IEC/EN61000-4-2 Contact ±4KV perf. Criteria B

Circuit Design and Application

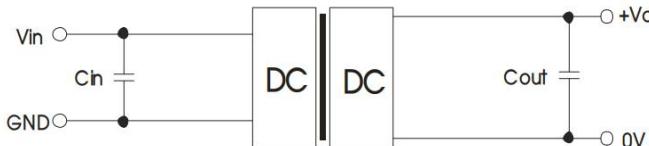


Figure 1: Application circuit

Table 1:
Recommended Capacitive Load Values

Vin(VDC)	Cin(µF)	Vo(VDC)	Cout(µF)
Nominal voltage	1-10	Nominal voltage	2.2-22

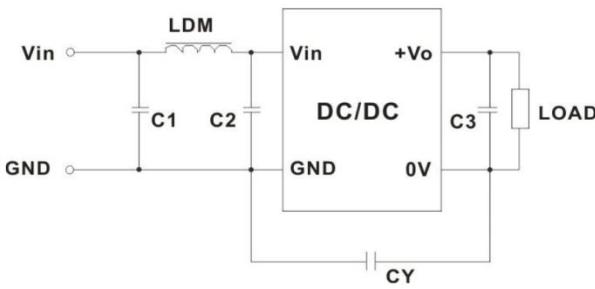


Figure 2: EMC Typical Recommended Circuits

Table 2:
Recommended Circuit Parameter Values

Category	Component	Value
EMI	C1	4.7µF /50V
	C2	4.7µF /50V
	C3	2.2-22µF /50V
	CY	270pF/2kV
	LDM	6.8µH

1. Typical application: If further reduction of input and output ripple is required, a capacitor filter network can be connected at the input and output ends. The application circuit is shown in Figure 1. However, suitable filter capacitors should be selected. If the capacitance is too large, it may cause overcurrent or poor startup of the power supply. For each output, while ensuring safe and reliable operation, the recommended capacitance load values are shown in Table 1.
2. EMC requirements: For situations with high EMC requirements, a typical EMC recommended circuit is shown in Figure 2.
3. Input requirements: Ensure that the fluctuation range of the input voltage does not exceed the upper and lower limits of the input voltage specified in this data sheet, and the input power must be greater than the output power specified in this data sheet. For situations with a 24V input voltage, it is recommended to connect a TVS tube between the positive and negative input pins for protection (recommended parameters for TVS tubes: 30V, bidirectional, SOD-123 packaging).
4. Output load requirements: Try to avoid using it without load as much as possible; When the actual power of the load is less than 10% of the rated output power in this data sheet, or when it needs to be used in no-load situations, it is recommended to connect a load resistor externally at the output end. The load resistor can be calculated according to 5-10% of the rated power in this data sheet. The calculation formula for the load resistor value is $RL=U_{out}^2/(P_{out}*10\%)$.
5. Overload protection: Under normal working conditions, the output circuit of this product has no protection function for overload situations. The simplest method is to connect a self recovery fuse in series at the input end, or add a circuit breaker outside the circuit; Or during design and selection, the actual power of the circuit should be around 60-80% of the rated power in this data sheet.

Product Characteristic Curve

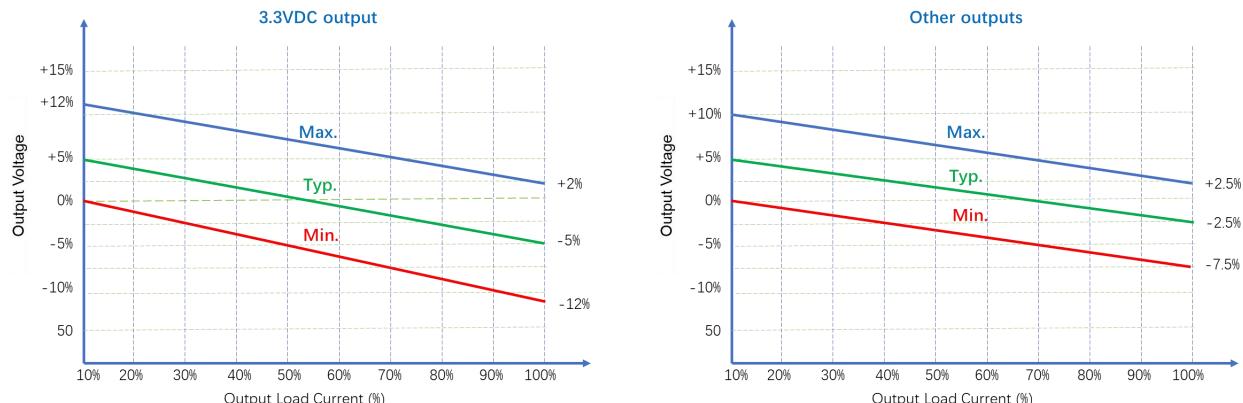


Figure 3: Voltage tolerance envelope

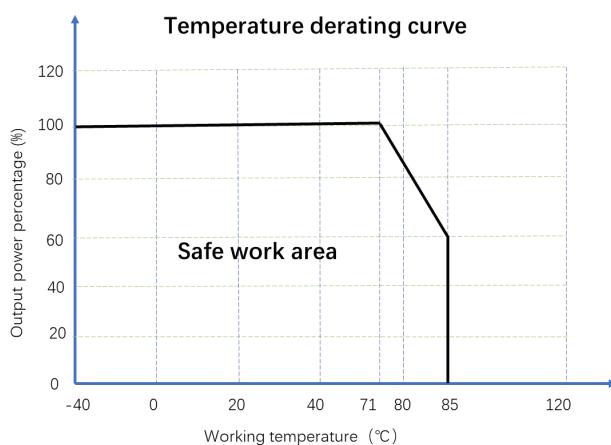


Figure 4: Temperature Derating Curve

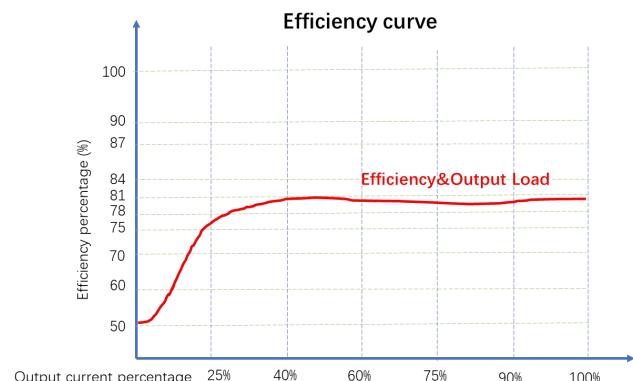


Figure 5: Efficiency VS Output Load
(Nominal Voltage Input)

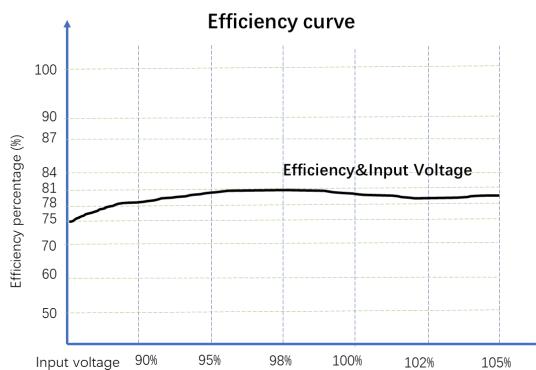


Figure 6: Efficiency VS Input Voltage
(100% Load)

Overall Dimensions and Pin Functions



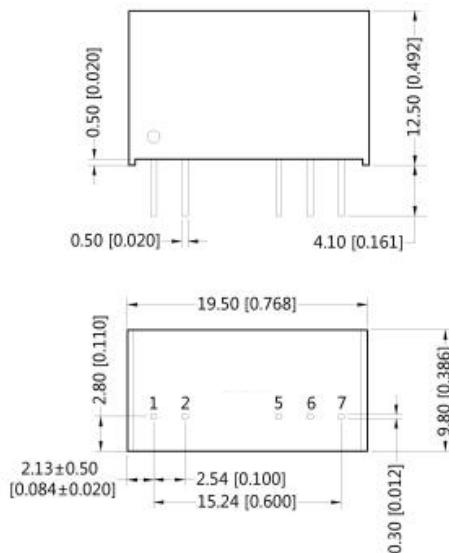


Figure 7: Overall dimensions


Packaging Method



18 Pieces/Tube



900 Pieces/Inner box



4500 Pieces/Outer box

Notes & Instructions

1. The input voltage shall not exceed the specified range value, otherwise permanent and unrecoverable damage may be caused;
2. Unless otherwise specified, the parameters in this manual are measured at 25 °C, 40%~75% humidity, input nominal voltage and output pure resistance mode under full load;
3. All index test methods are based on the company's enterprise standards.
4. The copyright and the final interpretation right of the product belong to AMCHARD.

DONGGUAN AMCHARD-POWER TECHNOLOGY CO., LTD.

www.amchard-power.com

Mail:info@amchard-power.com