

Features

1. Rated power: 5W Max
2. Universal input: 85~305VAC 47~63Hz
3. Regulated single output Isolation voltage 4000VAC
4. Typical efficiency 70 ... 79%
5. Energy saving, standby power only less than 0.1W
6. Operating temperature range: -40~+85°C
7. RoHS compliance
8. Compact 1"x1" package
9. Low profile 15mm height
10. Over voltage, over current and short circuit protection
11. Certified to IEC/EN/UL62368-1, EN60335-1
12. Meet CISPR32, EN55032 Class B with NO external circuit
13. 3 year warranty



3 years
Warranty

Selection Guide

Model Number	Input Voltage [VAC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [uF] Max.
QM05-23B03R2	85~305VAC 100~430VDC	3.3	1200	70	3000
QM05-23B05R2		5	1000	74	3000
QM05-23B09R2		9	555	78	1200
QM05-23B12R2		12	416	79	1200
QM05-23B15R2		15	333	79	680
QM05-23B24R2		24	208	79	220

* Only typical models are listed, other models may be available, upon request.

Input Specification

Parameters	Condition	Min.	Typ.	Max.	Unit	Note
Input voltage range	AC in	85		305	VAC	
	DC in	100	-	430	VDC	
Input frequency		47	-	63	Hz	
Nominal input voltage		100	-	277	VAC	

Input & Output Specification

Parameters	Condition	Min.	Typ.	Max.	Unit	Note
Input current	115VAC 230VAC	-	-	0.12 0.07	A	
Inrush current Cold start	115VAC 230VAC	-	15 25	-	A	
Leakage current	277VAC, 50Hz	-	-	0.25	mA RMS	
Output voltage accuracy		-	±3	-	%	
Line regulation	Full load	-	±0.5	-	%	
Load regulation $I_{OUT}=0\%\sim 100\%$ of $I_{OUT, rated}$		-	±1.0	-	%	
Ripple and noise 20MHz bandwidth, peak to peak		-	50	100	mV	
Temperature coefficient		-	±0.02	-	%/°C	
Standby power consumption	230VAC	-	0.1	-	W	
Hold up time Full load	115VAC 230VAC	-	5 50	-	mS	
Over voltage protection Hiccup or clamping by Zener diode	$V_{OUT}=3.3$, 5V $V_{OUT}=9$, 12V $V_{OUT}=15$ V $V_{OUT}=24$ V	-	-	7.5 17 20 30	VDC	
Over current protection	Automatic recovery	110	-	-	% I_{OUT}	
Short circuit protection		Continuous, hiccup mode, automatic recovery				
Recommended external fuse		1A, 300V, slow blow, *required*				
Minimum load		No minimum load is required				

General Specifications

Parameters	Condition	Min.	Typ.	Max.	Unit	Note
Isolation voltage 1 minute, leakage current 5mA max	I/P to O/P	4000	-	-	VAC	
Isolation resistance 500VDC, 25°C, 70%RH	I/P to O/P	100	-	-	M Ohm	
Switching frequency		-	65	-	KHz	
Operating temperature range	See "Derating Curve"	-40	-	85	°C	
Storage temperature		-40	-	105	°C	


General Specifications

Parameters	Condition	Min.	Typ.	Max.	Unit	Note
Storage humidity		10	-	95	%RH	
Operating altitude		-	-	5000	m	
Soldering temperature	Wave Manua l	-	260 360	-	°C	
Case material		Black plastic UL94-V0				
Cooling method		Free air convection				
Vibration		10Hz to 55Hz, 10G, 30 minutes along X, Y and Z axis				
Class II power		Yes, no FG				
MTBF	MIL-HDBK-217F	> 1,000,000 Hours, 25°C				
Safety certifications		UL/EN/IEC 62368, EN60335, EN61558, UKCA, FCC				
EMC (1) With External Circuit as shown in "Figure 1" (2) With External Circuit as shown in "Figure 2"	CE ESD RS EFT EFT Surge Surge CS DIP	CISPR32, EN55032 Class B IEC/EN61000-4-2, Contact ± 6 kV, Air ± 8 kV, Criteria B IEC/EN61000-4-3, 10V/m, Criteria A IEC/EN61000-4-4, ± 2 kV, Criteria B, (1) IEC/EN61000-4-4, ± 4 kV, Criteria B, (2) IEC/EN61000-4-5, Line to Line ± 1 kV, Criteria B, (1) IEC/EN61000-4-5, Line to Line ± 2 kV, Criteria B, (2) IEC/EN61000-4-6, 10Vrms, Criteria A IEC/EN61000-4-11, 0%, 70%, Criteria A				
Size, and Weight		25.4 x 25.4 x 15 mm, 16g				
Packing		720pcs/Carton, size: 405x365x245mm, 11.6Kg G.W.				


Characteristic Curves

Derating Curves

Output vs Ambient Temperature

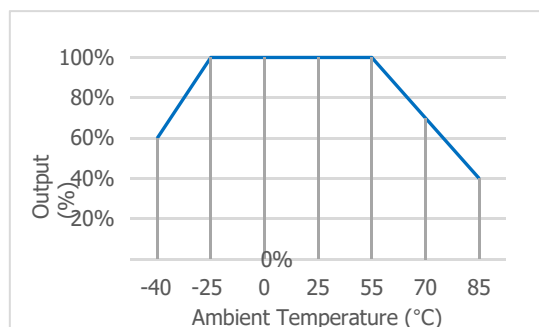

Output vs Input Voltage

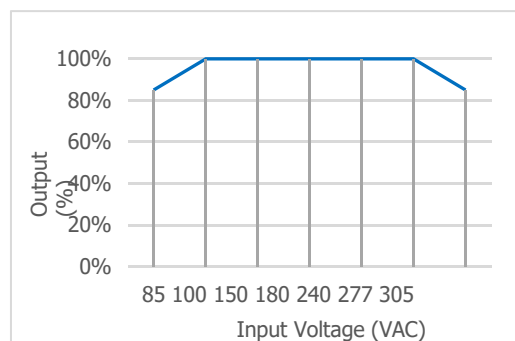

Typical External Circuit

Components with "" are required. The other components are highly recommended.

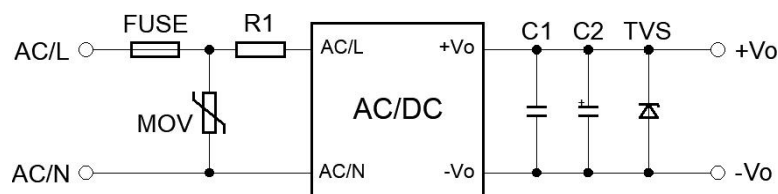


Figure 1. Typical external circuit

Recommended Components [Table 1]

SPEC	FUSE*	MOV	R1*	C1	C2	TVS
$V_{OUT}=3.3, 5V$	1A, 300V	10D681K	12 Ohm, 3W	1uF, 50V	150uF, 16V	SMBJ7.0A
$V_{OUT}=9V$	1A, 300V	10D681K	12 Ohm, 3W	1uF, 50V	120uF, 35V	SMBJ12A
$V_{OUT}=12, 15V$	1A, 300V	10D681K	12 Ohm, 3W	1uF, 50V	120uF, 35V	SMBJ20A
$V_{OUT}=24V$	1A, 300V	10D681K	12 Ohm, 3W	1uF, 50V	68uF, 35V	SMBJ30A

* For further questions contact one of our sales representatives.

EMC Enhancement for EN55032 Class B

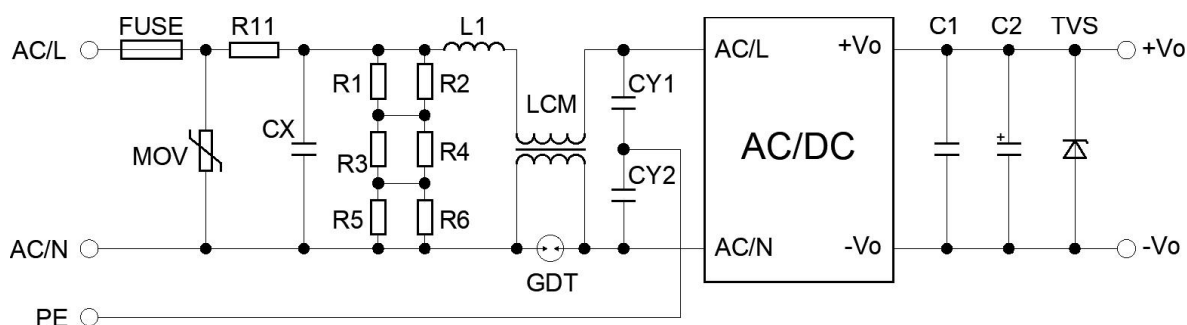


Figure 1. Circuit for EMC Enhancement



[Table 2] Recommended Components

MOV	CX	R11	L1	LCM	GDT	CY1, CY2
14D681K	334K, 305VAC	33 Ohm, 3W	1.2mH, 0.3A	20mH	300V, 1KA	1nF, 400VAC

*FUSE to be 2A, 300V, slow blow. *R1 ... R6 is the bleeder resistance of CX – 1.5Mohm, 150VDC

*Other components see the same in Table 1

Mechanical Specifications

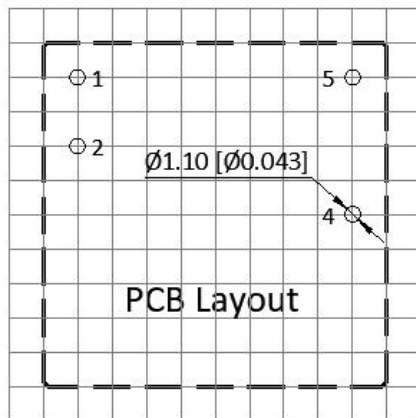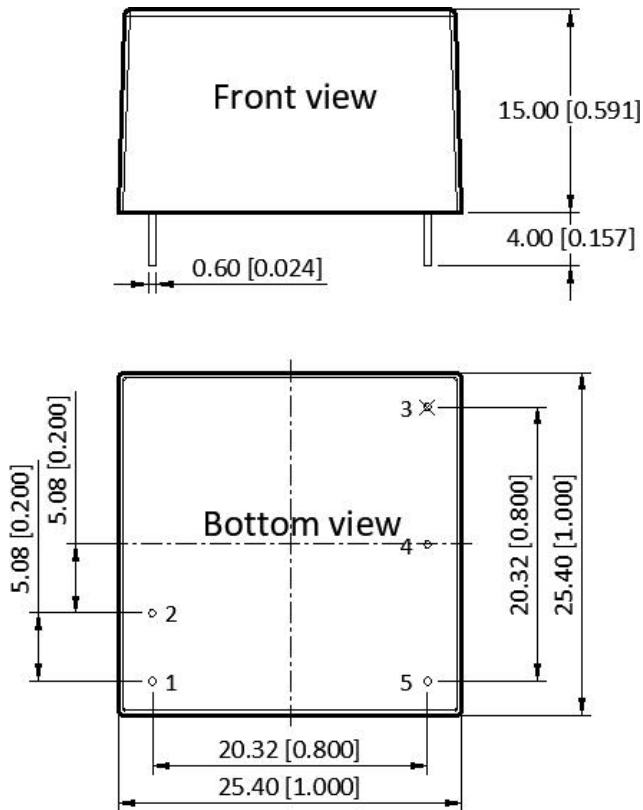

Pin #	Single Out
1	AC (N)
2	AC (L)
3	No Pin
4	-V _{OUT}
5	+V _{OUT}

Unless otherwise specified unit: mm [inch]
 General tolerance: ± 1.00 [± 0.040]
 Pin thickness: ± 0.15 [± 0.006]
 Pin distance: ± 0.50 [± 0.020]
 Footprint grid 2.54 x 2.54 mm

Notes & Instructions

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
2. The maximum capacitive load is tested under the input voltage range and full load condition;
3. Unless otherwise stated, all indexes in this manual are measured at $T_a=25^\circ\text{C}$, humidity $<75\%\text{RH}$, nominal input voltage and rated output load;
4. All index testing methods in this manual are based on the enterprise standards of the company;
5. Our company can provide product customization, specific needs can directly contact our technical staff;
6. AMCHARD reserves the right to make changes to the product at any time without notice.